

# EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D1G146-HQ03-04 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

Limited partnership · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

<b>Type</b>	<b>D1G146-HQ03-04</b>	
<b>Motor</b>	<b>M1G055-DF</b>	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min <sup>-1</sup>	1675
Power consumption	W	170
Current draw	A	1.2
Min. back pressure	Pa	0
Min. back pressure	inH <sub>2</sub> O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

## Technical description


<b>Weight</b>	1.9 kg
<b>Fan size</b>	146 mm
<b>Impeller material</b>	PP plastic
<b>Housing material</b>	PP plastic
<b>Motor suspension</b>	Motor vibration-damped on both sides
<b>Direction of rotation</b>	Counterclockwise, viewed toward rotor
<b>Degree of protection</b>	IP20
<b>Insulation class</b>	"B"
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None, open rotor
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- PWM control input</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for motor</li> </ul>
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC interference emission</b>	According to EN 61000-6-4 (industrial environment)
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	With plug
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>Protection class</b>	Built-in component with basic insulation, protection class results from installation according to intended use
<b>Conformity with standards</b>	EN 60335-1; EN 60335-2-31; CE
<b>Approval</b>	EAC; VDE



# EC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Product drawing

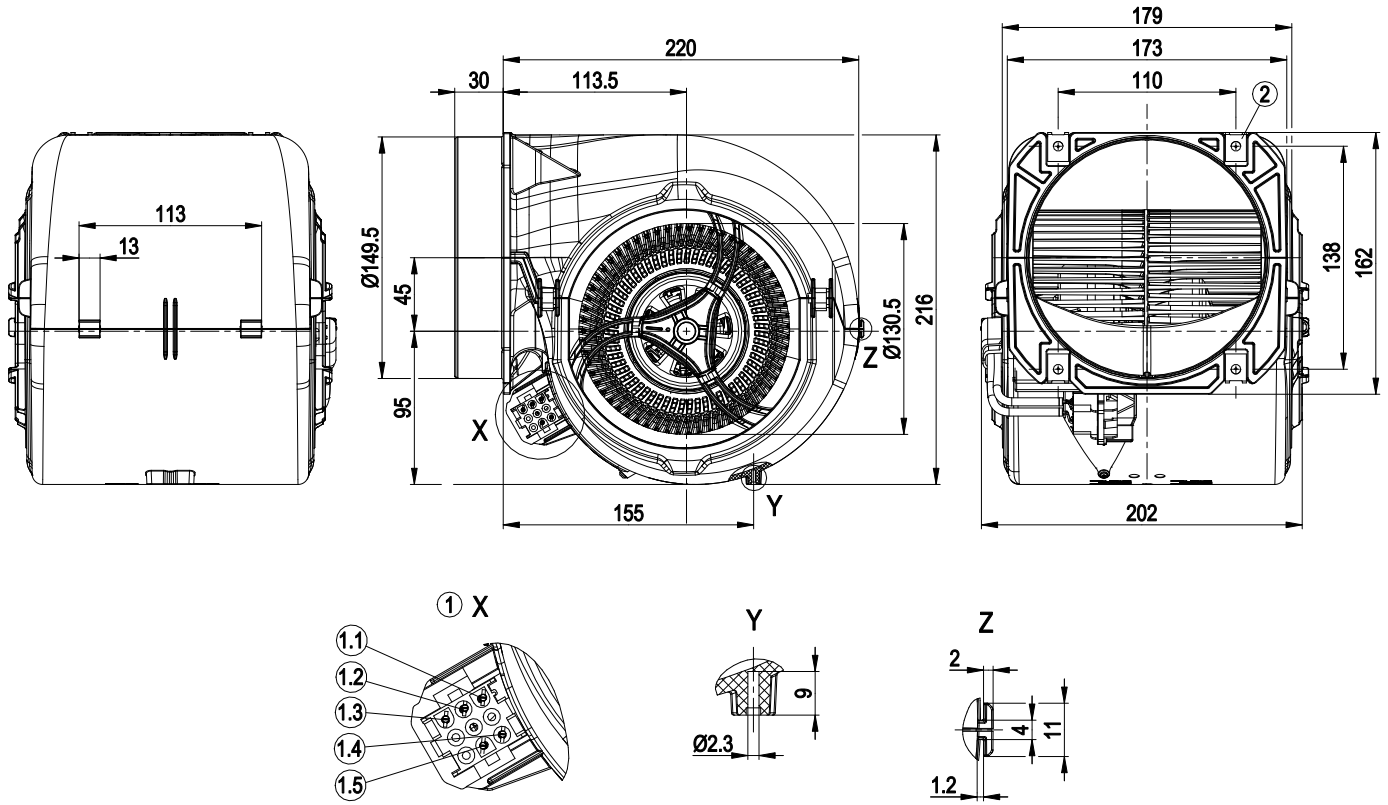

1	Coded plug system: 9-pole connector housing tyco 927231-7, 5x plug pin tyco 926887-1
	Mating connector (not included in scope of delivery): 9-pole connector housing tyco 1-1863003-2, socket tyco 926884-1
1.1	L (brown)
1.2	N (blue)
1.3	FE (green/yellow)
1.4	PWM (yellow)
1.5	GND (blue)
2	4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of mounting)





# EC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Connection diagram

### Customer circuit

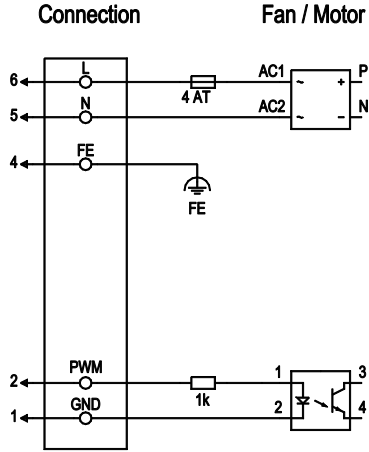

No.	Conn.	Designation	Color	Function/assignment
	6	L	brown	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	5	N	blue	Neutral conductor
	4	FE	green/yellow	Functional ground conductor
	2	PWM	yellow	Control input PWM, electrically isolated, $I_{sink} = 5-10\text{ mA}$
	1	GND	blue	GND connection for control interface




# EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

## Curves: Air performance 50 Hz

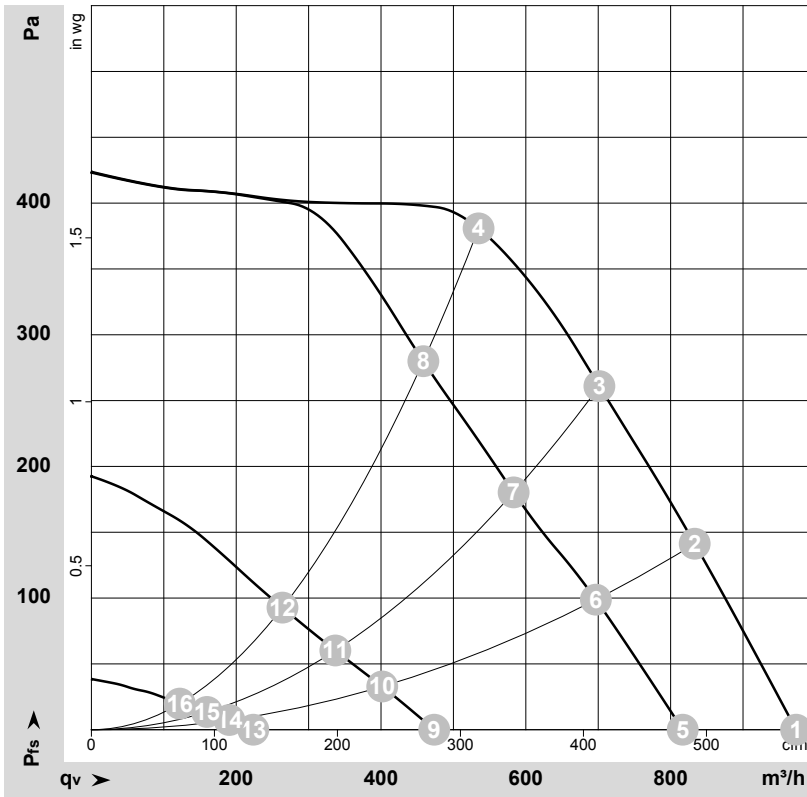

$\rho = 1.178 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-171114-1  
 Measurement: LU-171189-1  
 Measurement: LU-171191-1  
 Measurement: LU-171193-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	P <sub>fs</sub>	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m³/h	Pa	CFM	inH2O
1	230	50	1675	170	1.20	61	73	975	0	575	0.00
2	230	50	1970	170	1.20	61	72	835	140	490	0.56
3	230	50	2265	170	1.20	61	72	700	260	415	1.04
4	230	50	2570	150	1.10	61	72	535	380	315	1.53
5	230	50	1420	95	0.68			815	0	480	0.00
6	230	50	1665	94	0.68			695	99	410	0.40
7	230	50	1905	94	0.68			585	180	345	0.72
8	230	50	2215	94	0.68			460	279	270	1.12
9	230	50	865	21	0.16			475	0	280	0.00
10	230	50	1000	21	0.16			400	33	235	0.13
11	230	50	1130	21	0.16			335	60	200	0.24
12	230	50	1305	21	0.16			265	93	155	0.37
13	230	50	460	5.0	0.05			225	0	130	0.00
14	230	50	515	4.0	0.05			190	7	110	0.03
15	230	50	570	5.0	0.05			160	14	95	0.06
16	230	50	635	5.0	0.05			120	20	70	0.08

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 qv = Air flow · P<sub>fs</sub> = Pressure increase

