



D2E146-AP50-F6 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Nominal data

|                               |                   |         |
|-------------------------------|-------------------|---------|
| Type                          | D2E146-AP50-F6    |         |
| Motor                         | M2E068-EC         |         |
| Phase                         |                   | 1~      |
| Nominal voltage               | VAC               | 230     |
| Frequency                     | Hz                | 50      |
| Type of data definition       |                   | ml      |
| Valid for approval / standard |                   | CE      |
| Speed (rpm)                   | min <sup>-1</sup> | 2600    |
| Power input                   | W                 | 250     |
| Current draw                  | A                 | 1.1     |
| Motor capacitor               | µF                | 8       |
| Capacitor voltage             | VDB               | 400     |
| Capacitor standard            |                   | S0 (CE) |
| Min. back pressure            | Pa                | 420     |
| Min. ambient temperature      | °C                | -25     |
| Max. ambient temperature      | °C                | 65      |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

Data according to ErP directive

|                                   |   | Actual | Request 2015 |
|-----------------------------------|---|--------|--------------|
| 01 Overall efficiency $\eta_{es}$ | % | 33.6   | 33.6         |
| 02 Measurement category           |   | A      |              |
| 03 Efficiency category            |   | Static |              |
| 04 Efficiency grade N             |   | 44     | 44           |
| 05 Variable speed drive           |   | No     |              |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power input $P_e$          | kW                | 0.23 |
| 09 Air flow $q_v$             | m³/h              | 620  |
| 09 Pressure increase $p_{fs}$ | Pa                | 435  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 2625 |
| 11 Specific ratio*            |                   | 1.00 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-77448




## Technical features

|                                                                    |                                                                 |
|--------------------------------------------------------------------|-----------------------------------------------------------------|
| Mass                                                               | 4.5 kg                                                          |
| Size                                                               | 146 mm                                                          |
| Surface of rotor                                                   | Uncoated                                                        |
| Material of impeller                                               | Sheet steel, galvanised                                         |
| Housing material                                                   | Sheet steel, galvanised                                         |
| Motor suspension                                                   | Motor mounted via brackets on one side                          |
| Direction of rotation                                              | Counter-clockwise, seen on rotor                                |
| Type of protection                                                 | IP 44; Depending on installation and position as per EN 60034-5 |
| Insulation class                                                   | "F"                                                             |
| Humidity (F)/environmental protection class (H)                    | H0+                                                             |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C                                                         |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C                                                         |
| Mounting position                                                  | Shaft horizontal or rotor on bottom; rotor on top on request    |
| Condensate discharge holes                                         | Rotor-side                                                      |
| Operation mode                                                     | S1                                                              |
| Motor bearing                                                      | Ball bearing                                                    |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA                                                       |
| Motor protection                                                   | Thermal overload protector (TOP) wired internally               |
| Cable exit                                                         | Variable                                                        |
| Protection class                                                   | I (if protective earth is connected by customer)                |
| Motor capacitor according to EN 60252-1 in safety protection class | S0                                                              |
| Product conforming to standard                                     | EN 60335-1; CE                                                  |




Product drawing

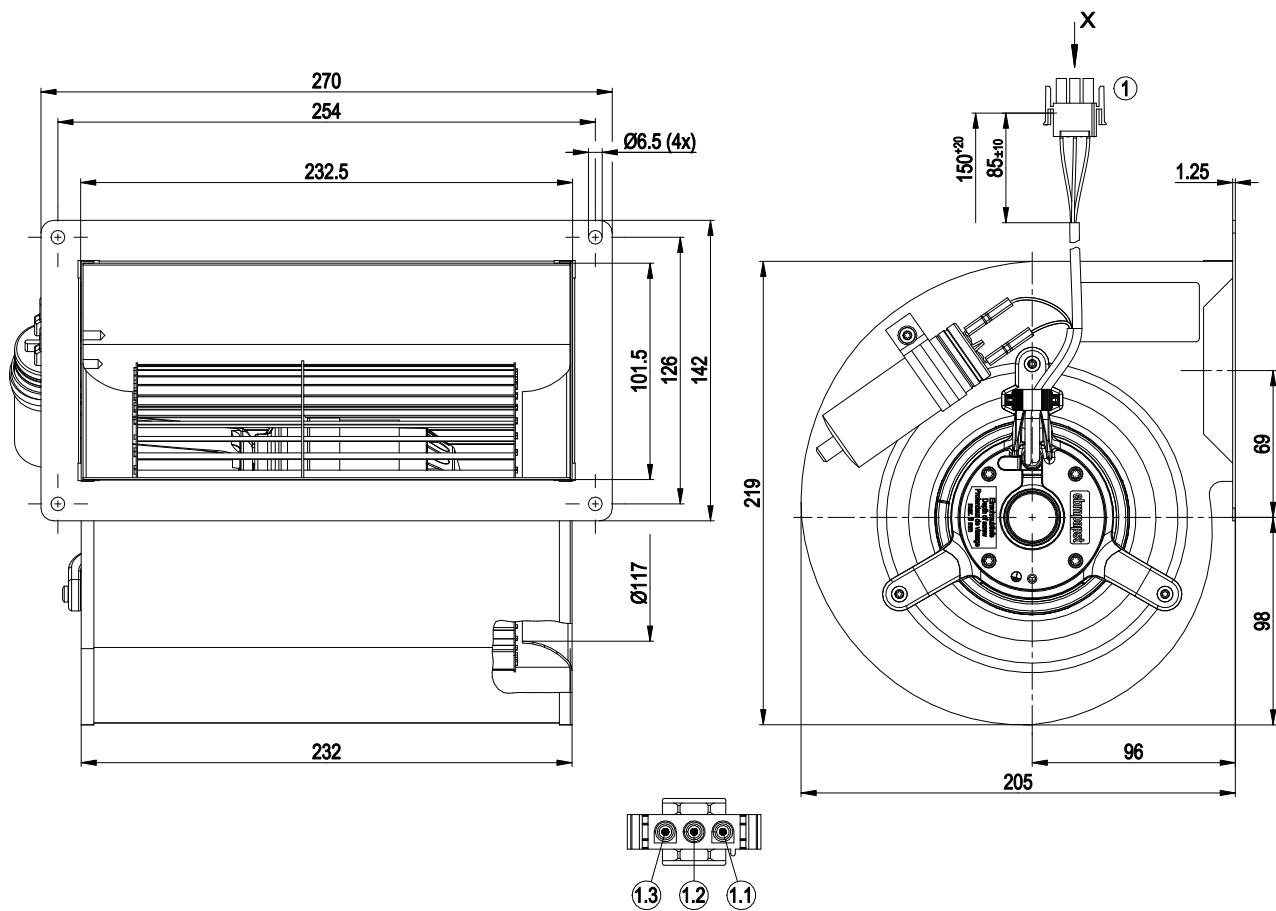

|     |                                                                                                                              |
|-----|------------------------------------------------------------------------------------------------------------------------------|
| 1   | Connection line halogen-silicone-free 3G 0.5 mm², connector housing 3-pole Tyco 1241809-2, 3x plug pin Tyco 926885-1 crimped |
| 1.1 | green/yellow                                                                                                                 |
| 1.2 | blue                                                                                                                         |
| 1.3 | black                                                                                                                        |


Connection screen



|   |      |   |       |    |              |
|---|------|---|-------|----|--------------|
| L | blue | N | black | PE | green/yellow |
|---|------|---|-------|----|--------------|



Charts: Air flow 50 Hz Y

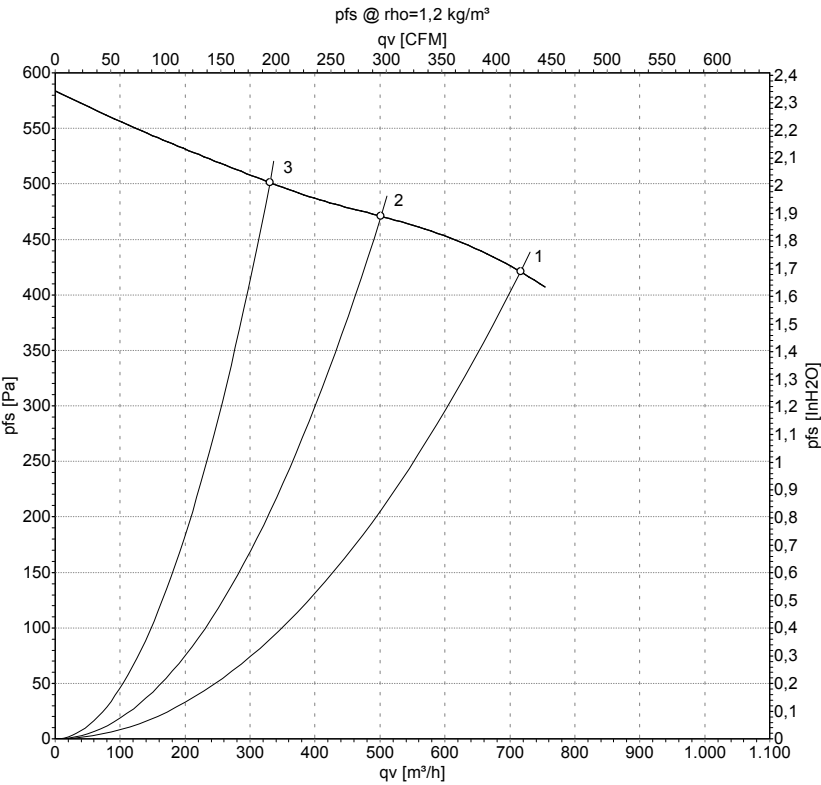

Measurement: LU-77448-1

Air performance measured as per ISO 5801  
Installation category A. For detailed  
information on the measuring set-up, please  
contact ebm-papst. Suction-side noise  
levels: LwA measured as per ISO 13347 /  
LpA measured with 1m distance to fan axis.  
The values given are valid under the  
measuring conditions mentioned above and  
may vary according to the actual installation  
situation. With any deviation from the  
standard set-up, the specific values have to  
be checked and reviewed with the unit  
installed.

Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub> | p <sub>fs</sub> | q <sub>V</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | inH2O           |
| 1 | 230 | 50 | 2600              | 250            | 1.10 | 715            | 420             | 420            | 1.69            |
| 2 | 230 | 50 | 2690              | 212            | 0.94 | 500            | 470             | 295            | 1.89            |
| 3 | 230 | 50 | 2765              | 186            | 0.83 | 330            | 500             | 195            | 2.01            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power input · I = Current draw · q<sub>V</sub> = Air flow · p<sub>fs</sub> = Pressure increase

