

D3G146-HS05-06

# EC centrifugal fan

forward curved, dual inlet  
with housing (large flange)



D3G146-HS05-06 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

Type	D3G146-HS05-06	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Type of data definition		ml
Speed	min <sup>-1</sup>	1320
Power input	W	107
Current draw	A	0.9
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	+50

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



# EC centrifugal fan

forward curved, dual inlet  
with housing (large flange)

## Technical features


<b>Mass</b>	2.5 kg
<b>Size</b>	146 mm
<b>Surface of rotor</b>	Galvanised
<b>Material of electronics housing</b>	PP plastic, black
<b>Material of impeller</b>	PP plastic, white
<b>Housing material</b>	PP plastic, black
<b>Motor suspension</b>	Motor anti-vibration mounted on both sides
<b>Direction of rotation</b>	Counter-clockwise, seen on rotor
<b>Type of protection</b>	Motor IP 54, electronic IP 20; Motor IP54
<b>Insulation class</b>	"F"
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None, open rotor
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Over-temperature protected motor</li> </ul>
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	> 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Cable exit</b>	Variable
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE



# EC centrifugal fan

forward curved, dual inlet  
with housing (large flange)

## Product drawing

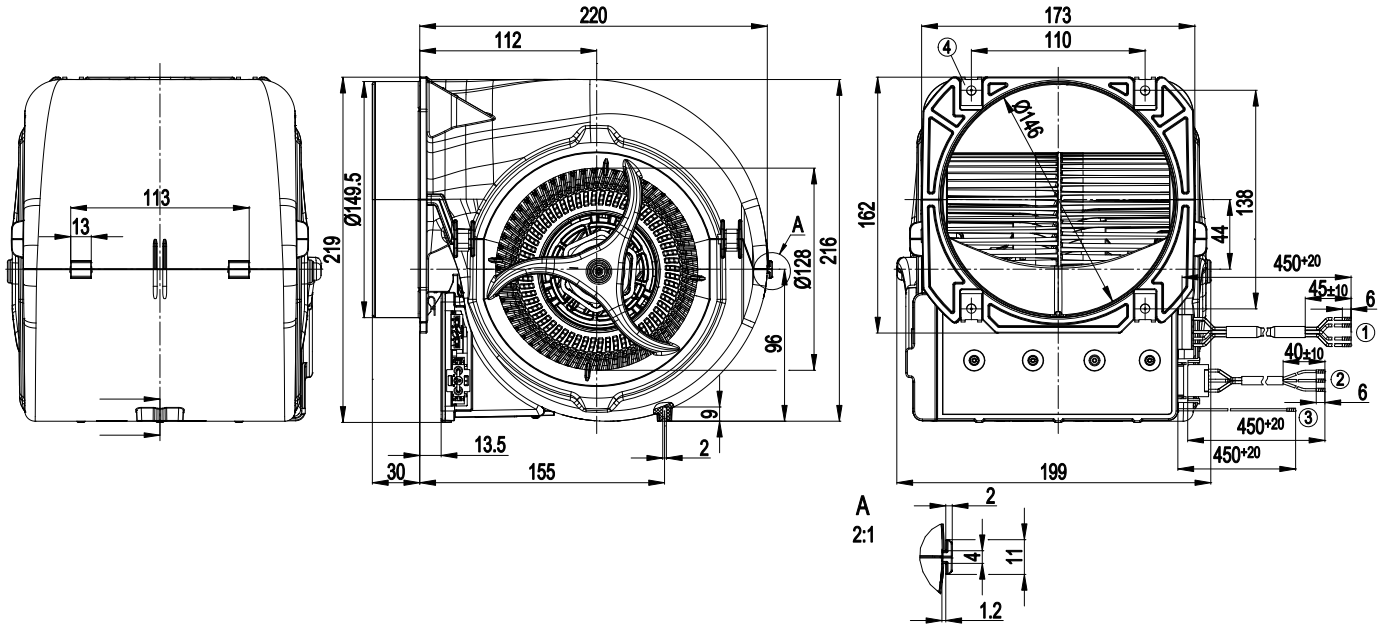


Line	No.	Signal	Colour	Function / assignment
1				Control line AWG20, 4 x brass lead tips crimped
			red	Voltage output 10V/ 1mA
			white	Tach output
			yellow	Control input 0 - 10V or PWM
2			blue	GND - Connection for control interface
				Connection line PVC 3 x 0.5 mm <sup>2</sup> ; 3 x brass lead tips crimped
			green/yellow	Protective earth
			black	Power supply 230 VAC, 50 60 Hz, for voltage range refer to rating plate
			blue	Neutral conductor
3			green/yellow	EMC earth, 1 x brass lead tip crimped
4				4 x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material)



# EC centrifugal fan

forward curved, dual inlet  
with housing (large flange)

## Connection screen

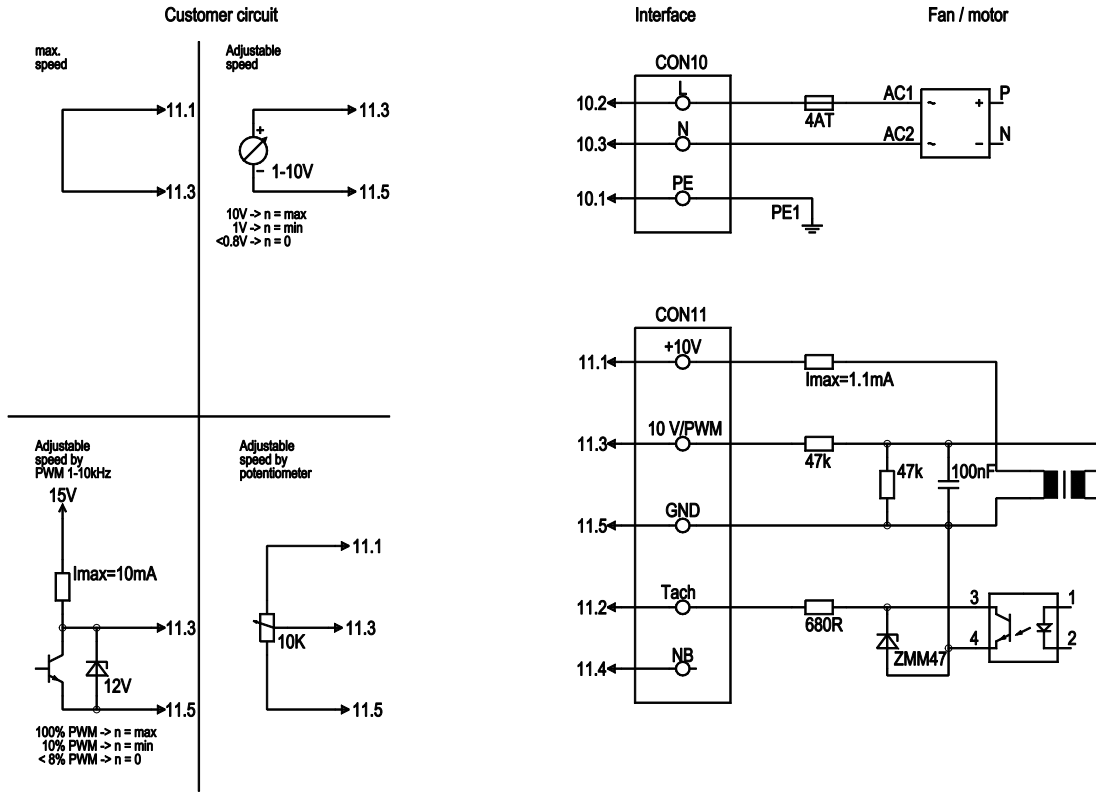


Line	No.	Signal	Colour	Function / assignment
CON10	10.1	PE	green/yellow	Protective earth
CON10	10.2	L	black	Power supply 230 VAC, 50-60 Hz, for voltage range refer to rating plate
CON10	10.3	N	blue	Neutral conductor
CON11	11.1	10 V/max. 1.1 mA	red	Voltage output 10 V/ 1.1 mA, electrically isolated
CON11	11.2	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
CON11	11.3	0-10 V PWM	yellow	Control input 0 - 10 V or PWM, electrically isolated
CON11	11.4	NB		Not assigned
CON11	11.5	GND	blue	GND - Connection for control interface



# EC centrifugal fan

forward curved, dual inlet  
with housing (large flange)

## Charts: Air flow 50 Hz

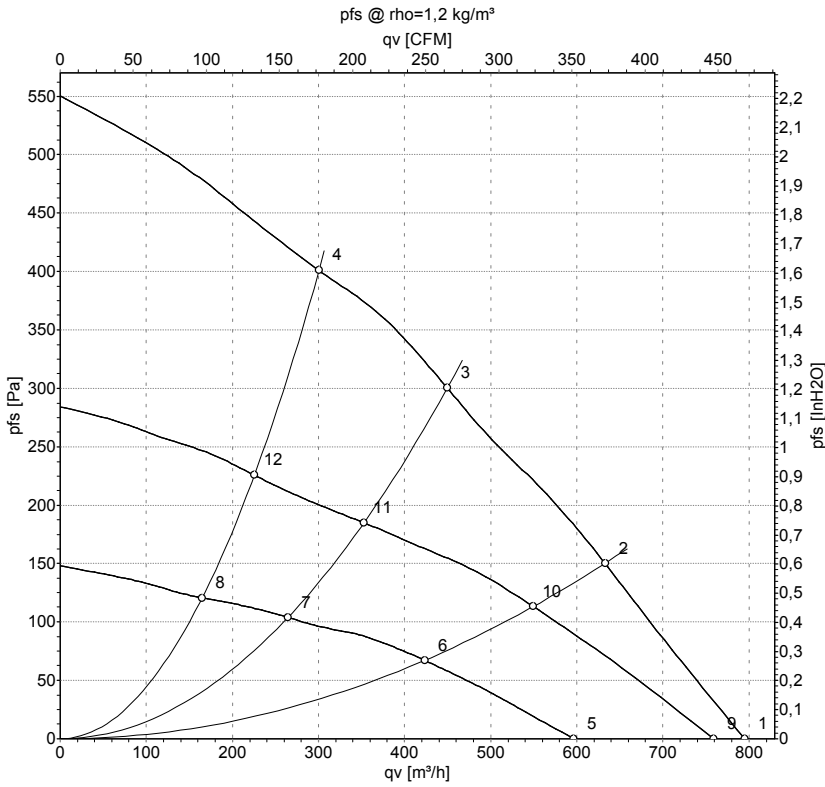

Measurement: LU-135250  
Measurement: LU-131828  
Measurement: LU-131827

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m³/h	Pa
1	230	50	1320	107	0.90	795	0
2	230	50	1730	107	0.90	635	150
3	230	50	2200	107	0.90	450	300
4	230	50	2525	97	0.80	300	400
5	230	50	1000	41	0.38	595	0
6	230	50	1170	30	0.29	425	67
7	230	50	1320	23	0.23	265	104
8	230	50	1420	18	0.19	165	120
9	230	50	1255	84	0.70	760	0
10	230	50	1505	67	0.58	550	113
11	230	50	1745	50	0.45	355	185
12	230	50	1910	42	0.39	225	226

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

