

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

D3G146-LV13-06 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	D3G146-LV13-06	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Method of obtaining data		ml
Speed	min ⁻¹	1550
Power consumption	W	167
Current draw	A	1.3
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	37.8	32.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		49.2	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.16
09 Air flow q_v	m ³ /h	600
09 Pressure increase p_{fs}	Pa	334
10 Speed n	min ⁻¹	2455
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-153304



EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description


Weight	3.1 kg
Fan size	146 mm
Rotor surface	Galvanized
Terminal box material	PP plastic
Impeller material	Sheet steel, galvanized
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	Motor IP54, electronics IP20; installation- and position-dependent
Insulation class	"F"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Fault output (open collector) - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1



EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

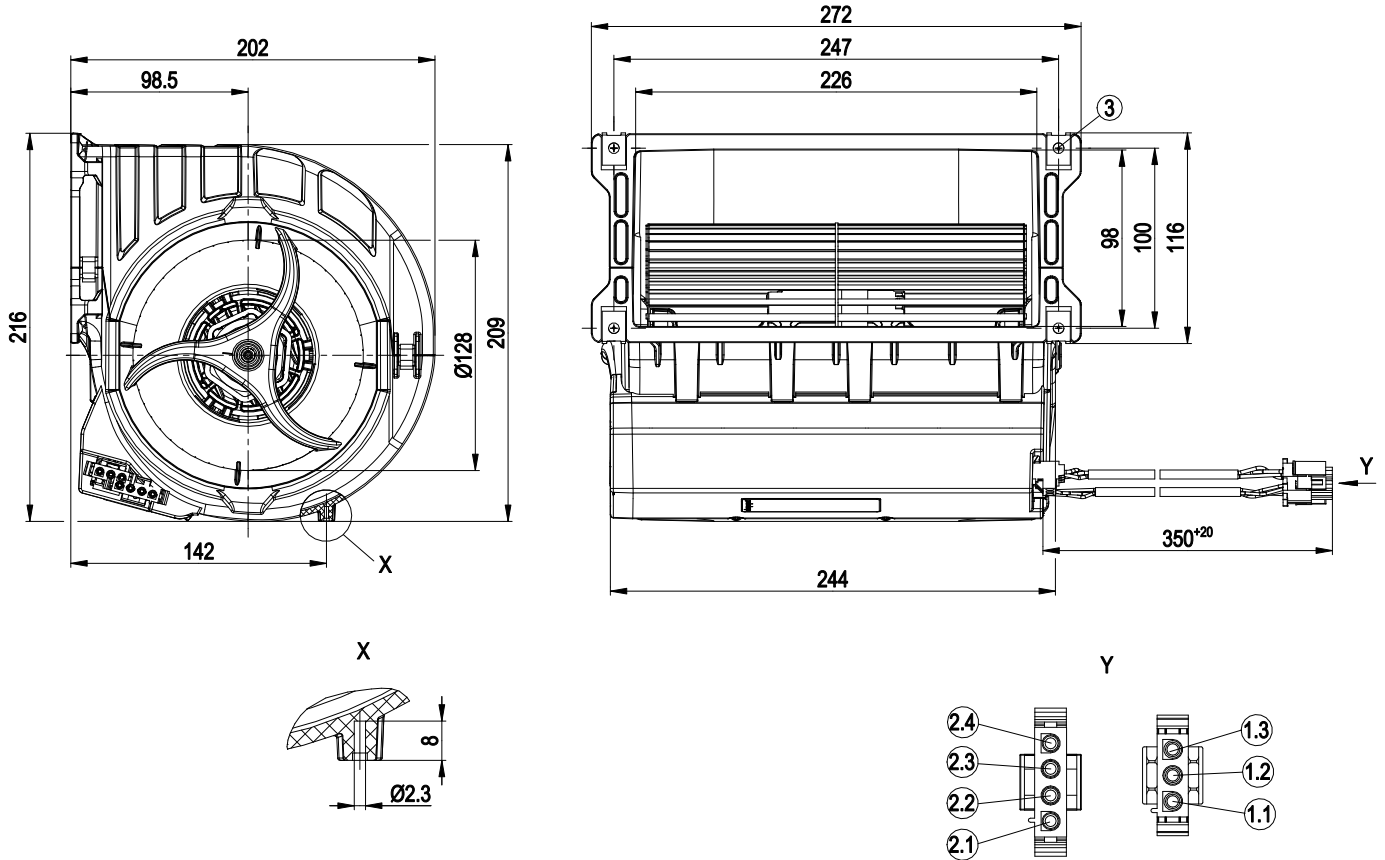


1	Cable ETFE AWG20, 3-pole connector housing tyco 350766-4 with 3x plug pin tyco 926883-1
1.1	PE (green/yellow)
1.2	N (blue)
1.3	L (black)
2	Cable PVC AWG22, 4-pole connector housing tyco 350779-4 with 4x plug pin tyco 926885-1
2.1	+10 V (red)
2.2	GND (blue)
2.3	0-10 V PWM (yellow)
2.4	Fan good / fan bad (white)
3	4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of attachment)

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

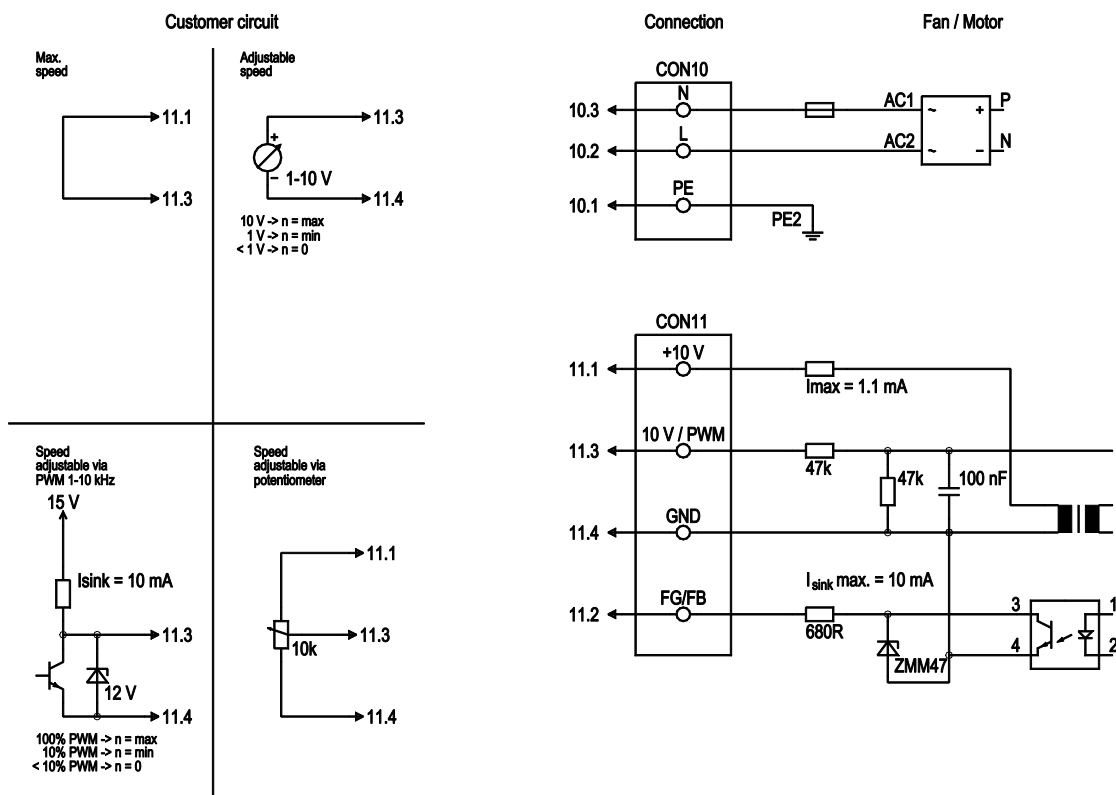


No.	Conn.	Designation	Color	Function/assignment
CON10	10.1	PE	green/yellow	Protective earth
CON10	10.2	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
CON10	10.3	N	blue	Neutral conductor
CON11	11.1	10 V/max. 1.1 mA	red	Voltage output 10 V, 1.1 mA, electrically isolated, not short-circuit-proof
CON11	11.2	FG/FB	white	Fan good / fan bad: open collector, fan good = high, electrically isolated, Isink max = 10 mA
CON11	11.3	0-10 V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
CON11	11.4	GND	blue	GND connection for control interface

EC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Curves: Air performance 50 Hz

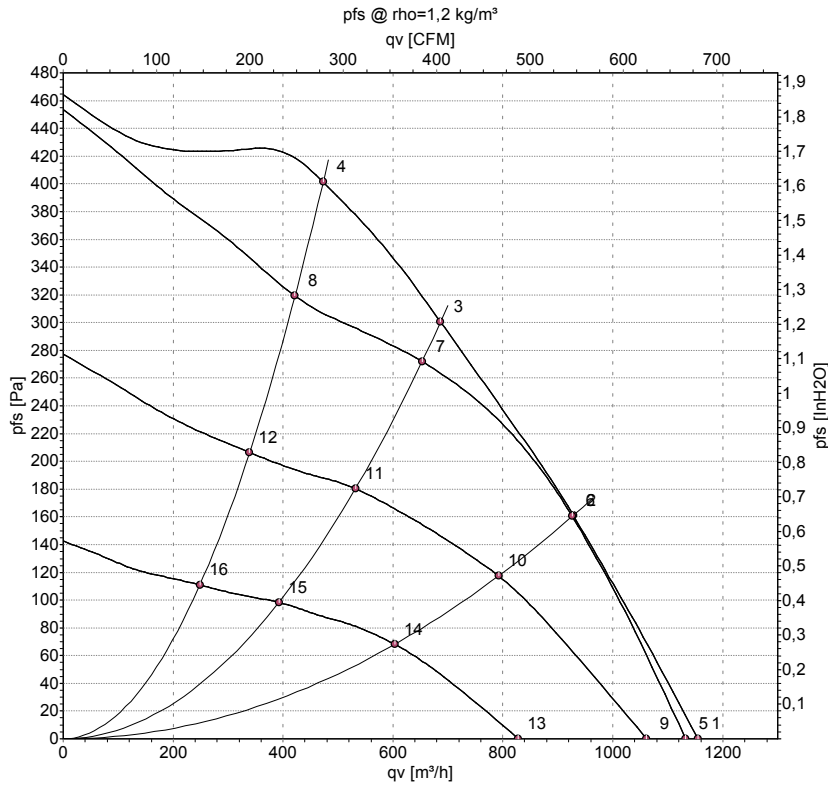

Measurement: LU-153304-1
 Measurement: LU-129106-1
 Measurement: LU-129107-1
 Measurement: LU-129113-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa
1	230	50	1550	167	1.30	61	74	1155	0
2	230	50	1910	167	1.30	60	72	930	160
3	230	50	2315	167	1.30	62	74	685	300
4	230	50	2630	165	1.30	65	76	475	400
5	230	50	1545	167	1.30			1130	0
6	230	50	1910	167	1.30			925	160
7	230	50	2225	148	1.18			655	273
8	230	50	2375	124	1.00			420	317
9	230	50	1470	145	1.14			1060	0
10	230	50	1660	109	0.88			790	118
11	230	50	1815	80	0.66			530	181
12	230	50	1915	64	0.54			340	206
13	230	50	1140	63	0.54			830	0
14	230	50	1260	49	0.43			605	68
15	230	50	1340	35	0.31			395	99
16	230	50	1395	28	0.26			250	111

U = Power supply · f = Frequency · n = Speed · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 qv = Air flow · p_{fs} = Pressure increase

