

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

D3G160-GJ52-12 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|------------|
| Type | D3G160-GJ52-12 | |
| Motor | M3G074-CF | |
| Phase | | 1~ |
| Nominal voltage | VAC | 230 |
| Nominal voltage range | VAC | 200 .. 277 |
| Frequency | Hz | 50/60 |
| Type of data definition | | fa |
| Speed (rpm) | min ⁻¹ | 1800 |
| Power input | W | 300 |
| Current draw | A | 1.4 |
| Min. back pressure | Pa | 100 |
| Min. ambient temperature | °C | -25 |
| Max. ambient temperature | °C | 50 |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

| | | Actual | Request 2015 | | |
|-----------------------------------|---|--------|--------------|--------------------------------|------------------------|
| 01 Overall efficiency η_{es} | % | 45.6 | 34.4 | 09 Power input P_{ed} | kW 0.3 |
| 02 Measurement category | | A | | 09 Air flow q_v | m ³ /h 905 |
| 03 Efficiency category | | Static | | 09 Pressure increase p_{fs} | Pa 490 |
| 04 Efficiency grade N | | 55.2 | 44 | 10 Speed (rpm) n | min ⁻¹ 2580 |
| 05 Variable speed drive | | Yes | | 11 Specific ratio [*] | 1.01 |

Data definition with optimum efficiency.
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

^{*} Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-168185




Technical features

| | |
|--|--|
| Mass | 5.2 kg |
| Size | 160 mm |
| Surface of rotor | Galvanised |
| Material of impeller | Sheet steel, galvanised |
| Housing material | PP plastic |
| Motor suspension | Motor anti-vibration mounted on one side via brackets |
| Direction of rotation | Counter-clockwise, seen on rotor |
| Type of protection | IP 54 |
| Insulation class | "F" |
| Humidity (F)/environmental protection class (H) | H0 - dry environment |
| Max. permissible ambient motor temp. (transp./ storage) | +80 °C |
| Min. permissible ambient motor temp. (transp./storage) | -40 °C |
| Mounting position | Any |
| Condensate discharge holes | None |
| Operation mode | S1 |
| Motor bearing | Ball bearing |
| Technical features | <ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Operation and alarm display - Tach output - Alarm relay - Integrated PID controller - Output limit - Motor current limit - PFC, active - RS485 MODBUS RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection |
| EMC interference immunity | Acc. to EN 61000-6-2 (industrial environment) |
| EMC harmonics | Acc. to EN 61000-3-2/3 |
| EMC interference emission | Acc. to EN 61000-6-3 (household environment) |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA |
| Motor protection | Thermal overload protector (TOP) wired internally |
| Cable exit | Axial |
| Protection class | I (if protective earth is connected by customer) |

EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Product drawing

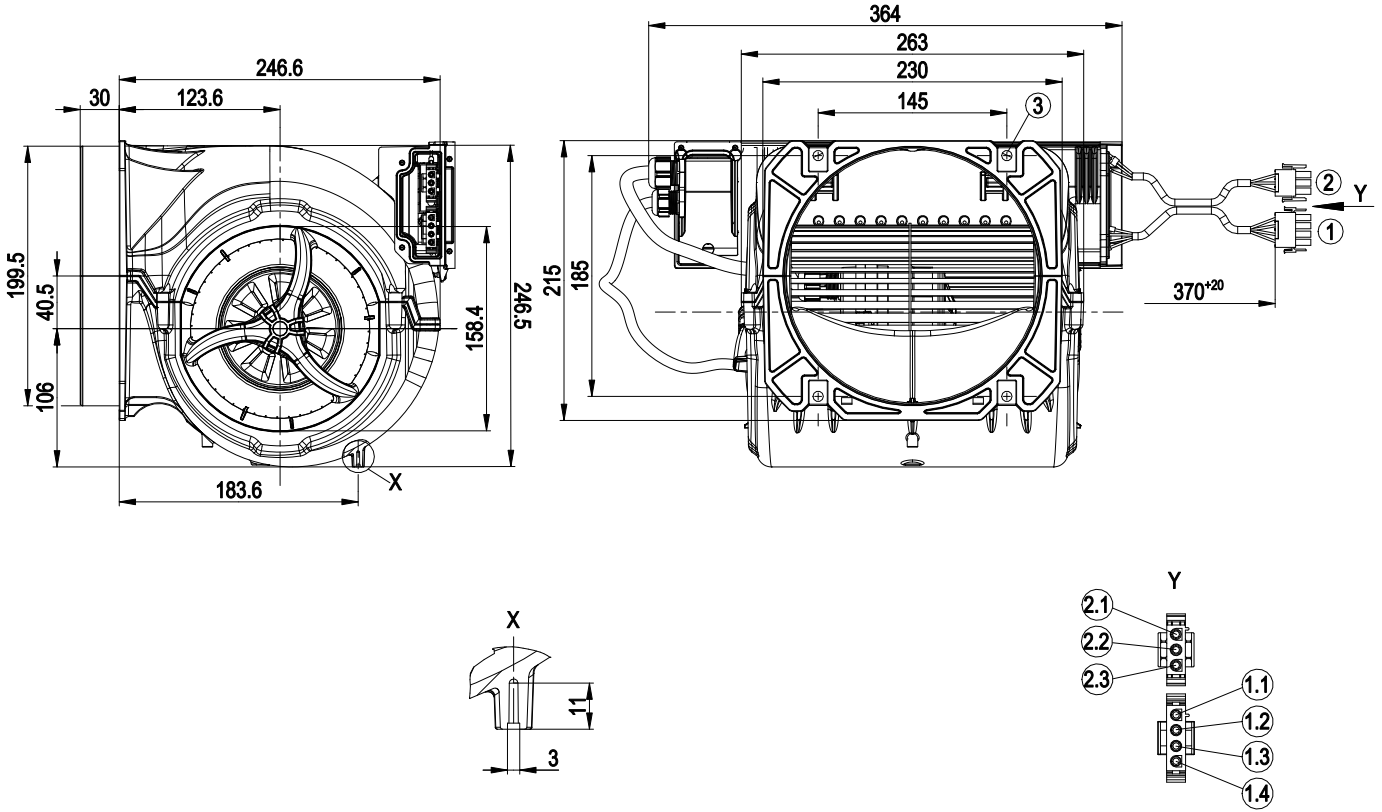


| | |
|-----|---|
| 1 | Connection line PVC AWG20, connector housing 3-pole tyco 1241809-2, 3x plug pin tyco 350218-1 |
| 1.1 | PE (green/yellow) |
| 1.2 | N (blue) |
| 1.3 | L (black) |
| 2 | Connection line PVC AWG22, tyco 4-pole connector housing 926298-6, 4x tyco plug pin 926885-1 crimped |
| 2.1 | +10 V (red) |
| 2.2 | GND (blue) |
| 2.3 | 0-10 V PWM (yellow) |
| 2.4 | Tach (white) |
| 3 | 4x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus thickness of mounting material) |



EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Connection screen

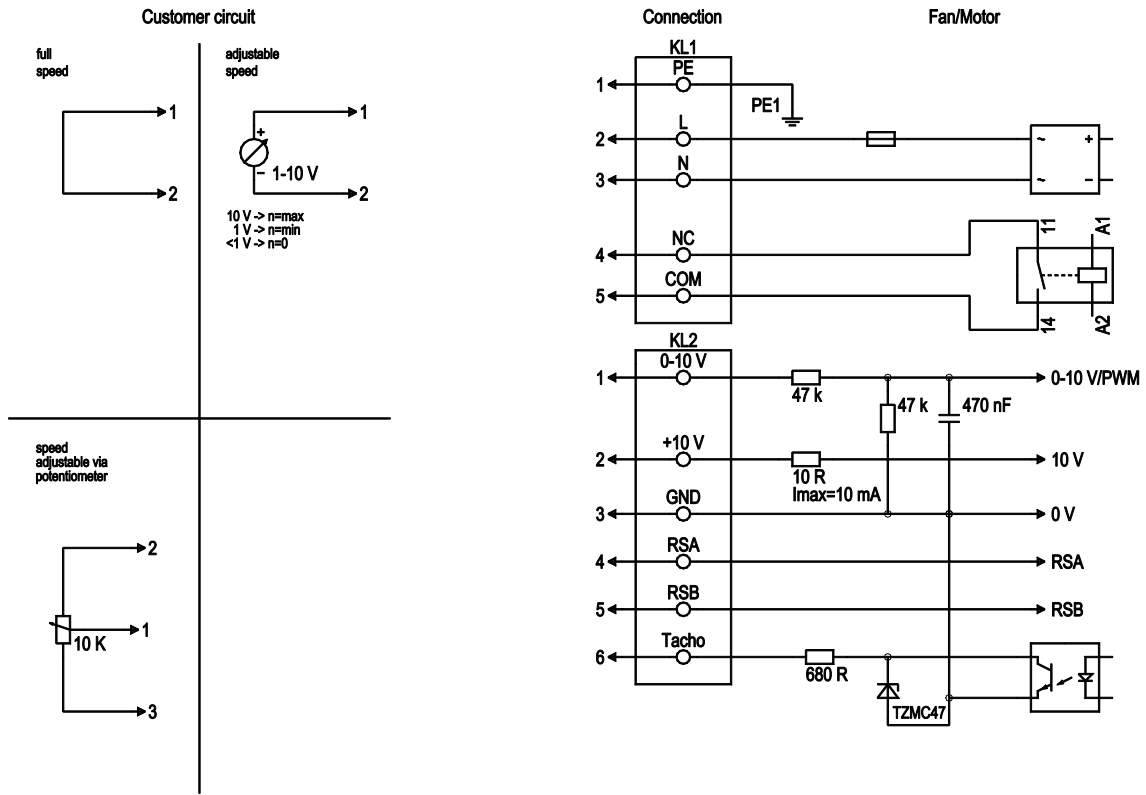


| No. | Conn. | Designation | Function / assignment |
|-----|-------|-------------|---|
| KL1 | 1 | PE | Protective earth |
| KL1 | 2 | L | Power supply, phase, 50/60 Hz |
| KL1 | 3 | N | Power supply, neutral conductor, 50/60 Hz |
| KL1 | 4 | NC | Status relay, floating status contact, break for failure, contact rating 250 VAC/2 A (AC1) min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| KL1 | 5 | COM | Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, basic insulation on mains side and reinforced insulation on control interface side |
| KL2 | 1 | 0-10 V | Analogue input (set value), 0-10 V, Ri=100 kΩ, parametrisable curve, SELV |
| KL2 | 2 | +10 V | Fixed voltage output 10 VDC, SELV |
| KL2 | 3 | GND | Signal ground for control interface, SELV |
| KL2 | 4 | RSA | RS-485 interface for MODBUS, RSA; SELV |
| KL2 | 5 | RSB | RS-485 interface for MODBUS, RSB; SELV |
| KL2 | 6 | Tacho | Speed monitoring output, open collector, 1 pulse per revolution, Isink max = 10 mA, SELV |



EC centrifugal fan

forward curved, dual inlet
with housing (flange)

Charts: Air flow 50 Hz

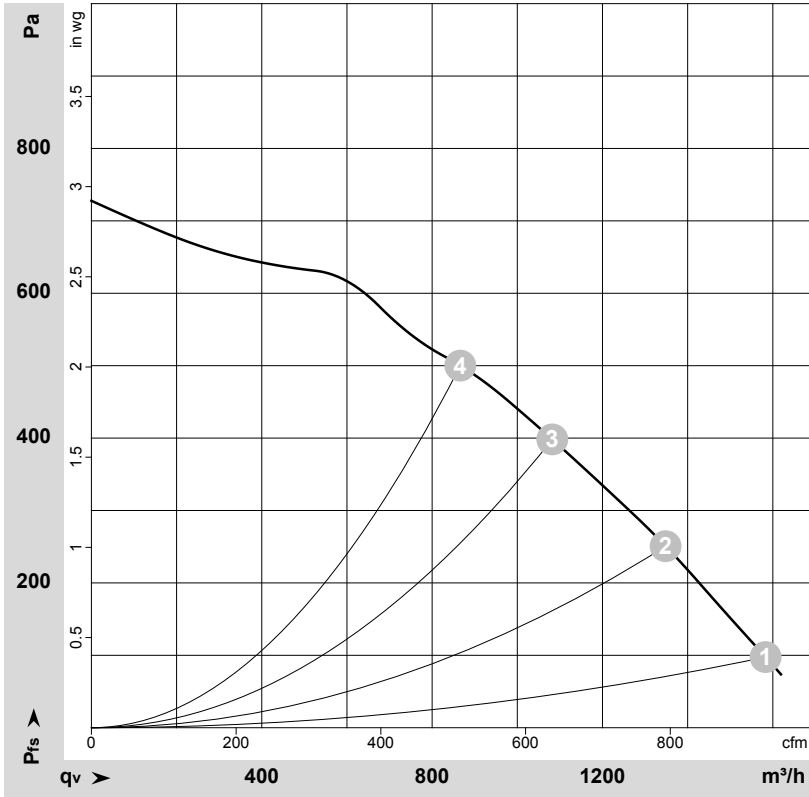

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-168185-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

| | U | f | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | p _{fs} | q _v | p _{fs} |
|---|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|--------------------|
| | V | Hz | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | inH ₂ O |
| 1 | 230 | 50 | 1800 | 300 | 1.40 | 64 | 77 | 1585 | 100 | 930 | 0.40 |
| 2 | 230 | 50 | 2045 | 307 | 1.39 | 63 | 75 | 1350 | 250 | 795 | 1.00 |
| 3 | 230 | 50 | 2355 | 306 | 1.39 | 63 | 75 | 1080 | 400 | 635 | 1.61 |
| 4 | 230 | 50 | 2620 | 302 | 1.37 | 65 | 77 | 865 | 500 | 510 | 2.01 |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase

