

D3G180-AB60-13

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)



D3G180-AB60-13 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D3G180-AB60-13	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1200
Power consumption	W	220
Current draw	A	1.75
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change




Technical description

Weight	7.5 kg
Size	180 mm
Motor size	74
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+; F3-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60950-1; EN 60335-1; EN 61800-5-1

EC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

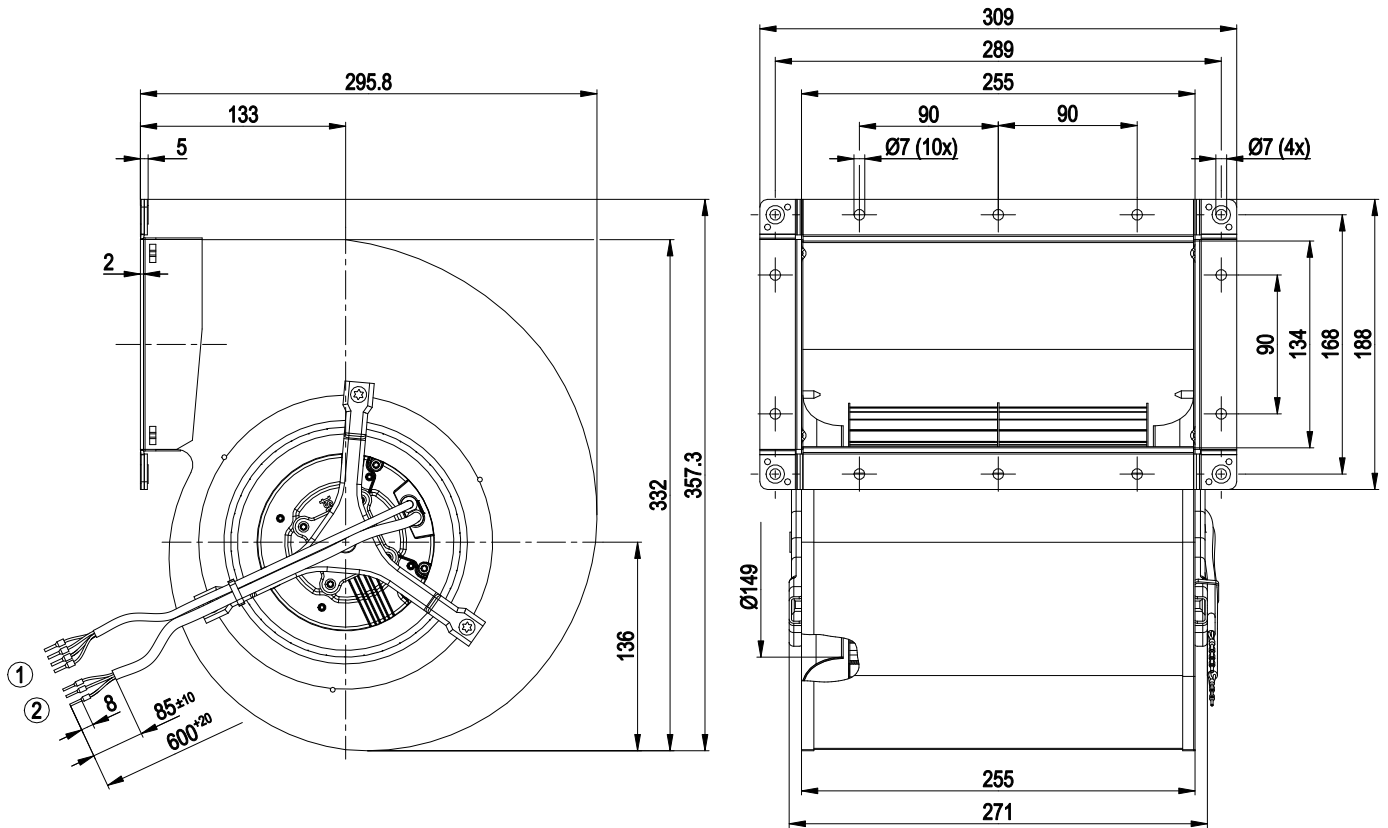


- | | |
|---|--------------------------------------|
| 1 | Cable PVC AWG22, 4x crimped ferrules |
| 2 | Cable PVC AWG18, 3x crimped ferrules |

EC centrifugal fan


forward-curved, dual-intake
with housing (flange)

Connection diagram

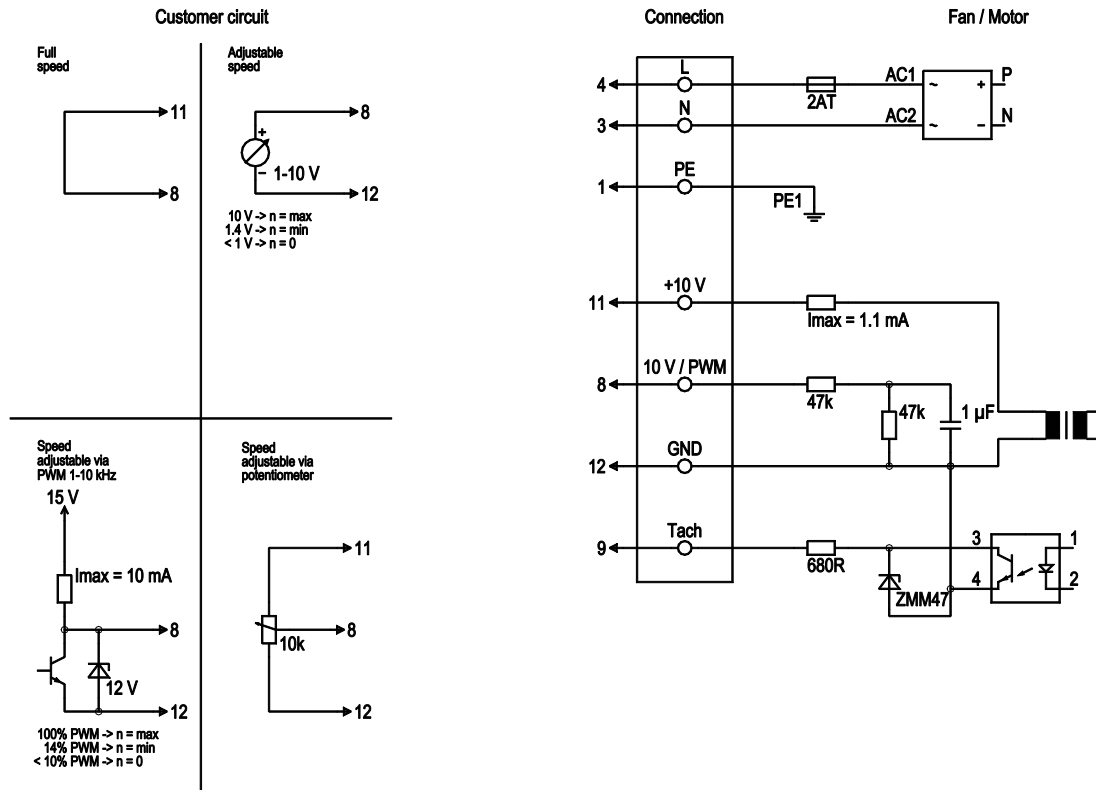

No.	Conn.	Designation	Color	Function/assignment
	4	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
	3	N	blue	Neutral conductor
	1	PE	green/yellow	Protective earth
	8	0-10 V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
	9	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	11	10V / max 1.1 mA	red	Voltage output 10 V/max. 1.1 mA, electrically isolated
	12	GND	blue	GND connection for control interface

Curves: Air performance 50 Hz

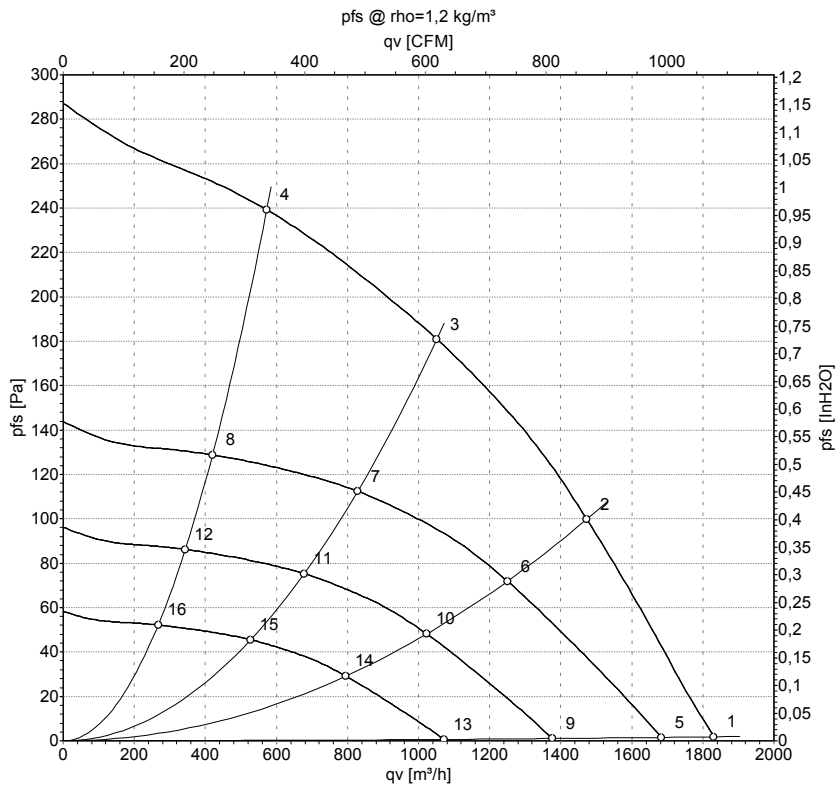

Measurement: LU-144578-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	1200	220	1.75	1830	0	1080	0.00
2	230	50	1295	175	1.46	1475	100	865	0.40
3	230	50	1395	135	1.15	1050	180	620	0.72
4	230	50	1500	89	0.79	570	240	335	0.96
5	230	50	1100	170	1.36	1685	0	990	0.00
6	230	50	1100	107	0.89	1250	72	735	0.29
7	230	50	1100	66	0.56	830	113	490	0.45
8	230	50	1100	35	0.31	420	129	245	0.52
9	230	50	900	93	0.75	1375	0	810	0.00
10	230	50	900	59	0.49	1025	48	600	0.19
11	230	50	900	36	0.31	680	76	400	0.31
12	230	50	900	19	0.17	345	86	200	0.35
13	230	50	700	44	0.35	1070	0	630	0.00
14	230	50	700	28	0.23	795	29	470	0.12
15	230	50	700	17	0.15	525	46	310	0.18
16	230	50	700	9.0	0.08	265	52	155	0.21

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

