

# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

D3G200-CB22-71 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142



## Nominal data

Type	D3G200-CB22-71	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	207 .. 253
Frequency	Hz	50/60
Type of data definition		ml
Speed	min <sup>-1</sup>	1640
Power input	W	465
Current draw	A	3.0
Min. back pressure	Pa	225
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

\* Specific ratio =  $1 + p_b / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	%	46.4	27.8	34.8
Efficiency grade N		55.6	37	44
Power input $P_{ed}$	kW	0.35		
Air flow $q_v$	m <sup>3</sup> /h	1510		
Pressure increase $p_{fs}$	Pa	351		
Speed n	min <sup>-1</sup>	1750		

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Technical features


<b>Mass</b>	9.4 kg
<b>Size</b>	200 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of electronics housing</b>	Die-cast aluminium
<b>Material of impeller</b>	Sheet steel, galvanised
<b>Housing material</b>	Sheet steel, galvanised
<b>Motor suspension</b>	Motor anti-vibration mounted on one side via brackets
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 54
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F3-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	-40 °C
<b>Mounting position</b>	Shaft horizontal
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Alarm relay</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul>
<b>EMC interference immunity</b>	Acc. to EN 61000-6-2 (industrial environment)
<b>EMC interference emission</b>	Acc. to EN 61000-6-3 (household environment)
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Cable exit</b>	Variable
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 61800-5-1; CE
<b>Approval</b>	CSA; UL



# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Product drawing

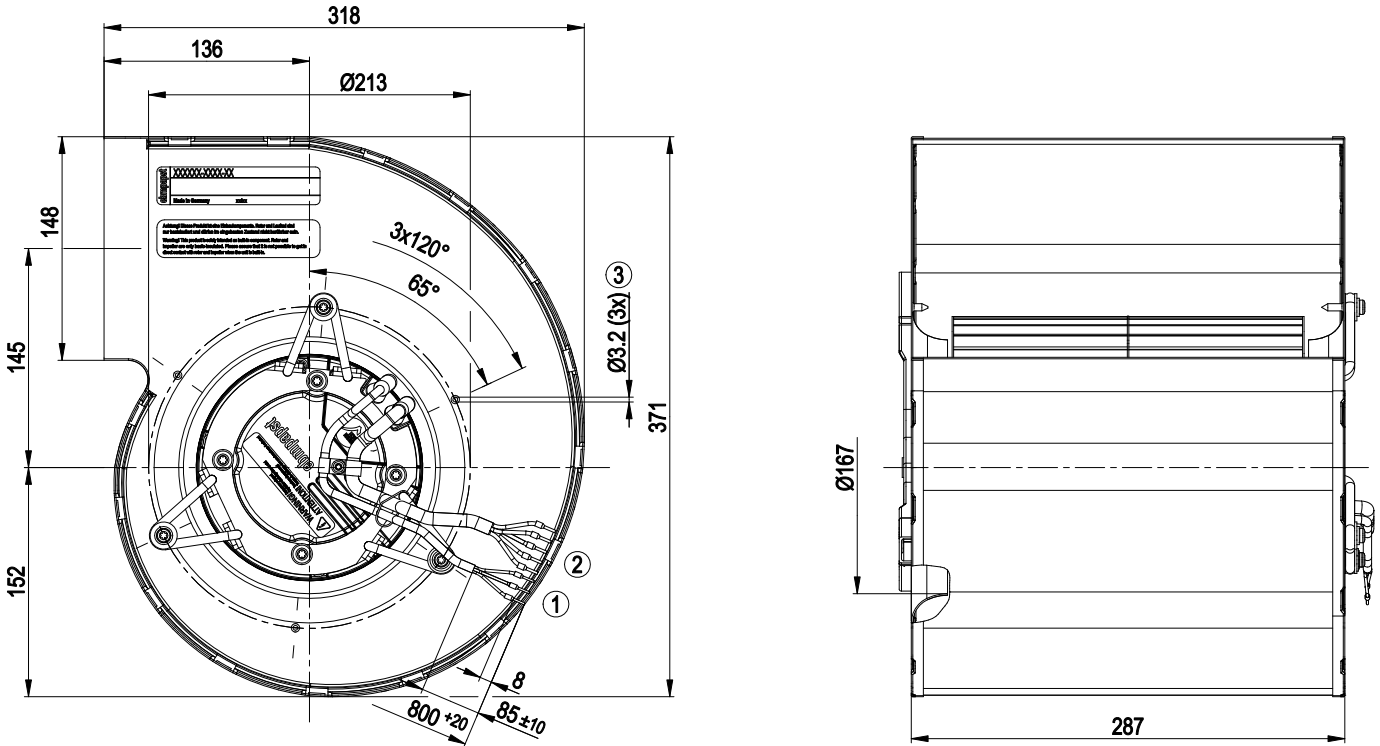

1	Connection line PVC AWG22, 3x crimped core-end sleeves
2	Connection line PVC AWG18, 5x crimped core-end sleeves
3	Holes in both side parts




# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Connection screen


### Customer circuit

Notes on various control possibilities and their applications

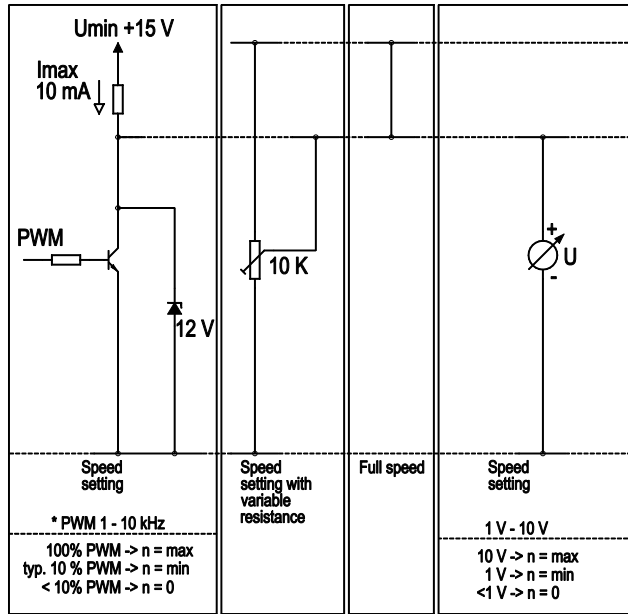

### Connection


### Fan / motor

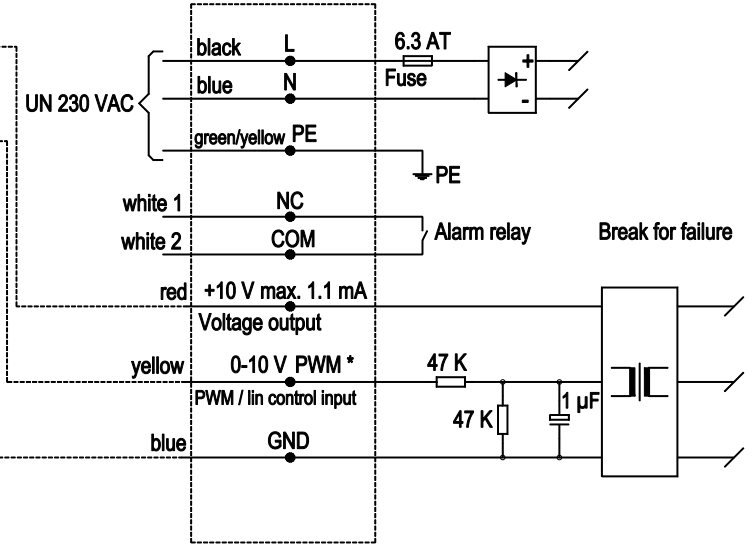

# EC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Charts: Air flow

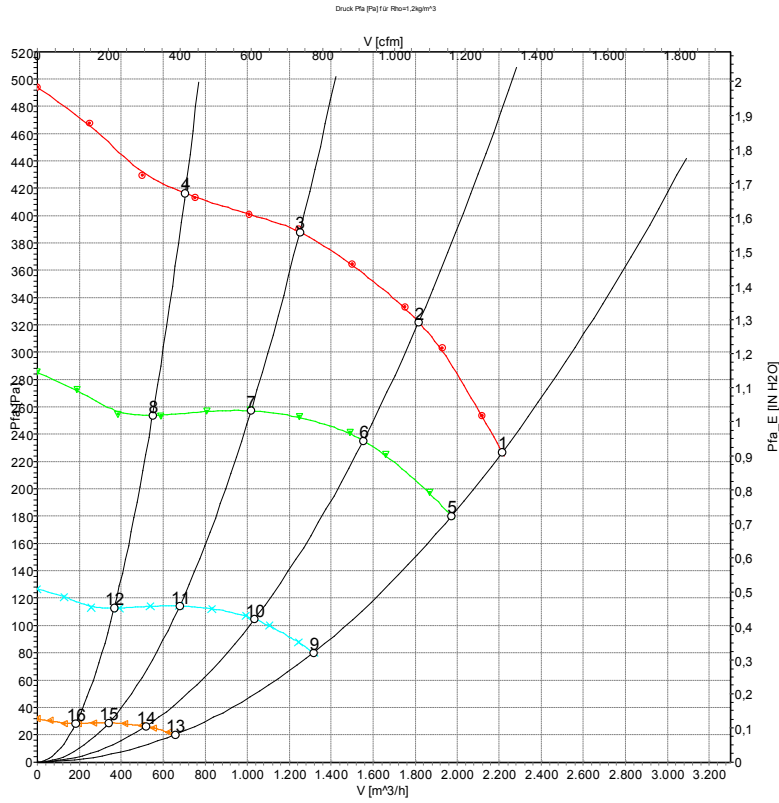

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	qv	p <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	m <sup>3</sup> /h	Pa
1	230	50	1640	465	3.00	70	2215	225
2	230	50	1665	402	2.60	68	1815	320
3	230	50	1750	308	1.98	66	1250	390
4	230	50	1825	225	1.48	66	705	415
5	230	50	1425	337	2.18	68	1975	180
6	230	50	1425	251	1.62	65	1550	235
7	230	50	1425	166	1.07	61	1020	258
8	230	50	1425	107	0.70	61	550	254
9	230	50	950	100	0.65	56	1315	80
10	230	50	950	74	0.48	53	1035	105
11	230	50	950	49	0.32	50	680	115
12	230	50	950	32	0.21	50	365	113
13	230	50	475	12	0.08	37	660	20
14	230	50	475	9.3	0.06	34	520	26
15	230	50	475	6.2	0.04	32	340	29
16	230	50	475	4.0	0.03	32	185	28

U = Supply voltage · f = Frequency · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

