

D3G250-AB27-62

EC centrifugal fan

forward curved, dual inlet
with housing (large flange)



D3G250-AB27-62 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142



Nominal data

Type	D3G250-AB27-62	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Type of data definition		ml
Speed	min ⁻¹	1500
Power input	W	380
Current draw	A	1.7
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	Yes
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

	Actual	Request 2013	Request 2015
Overall efficiency η_{es}	49.3	28	35
Efficiency grade N	58.3	37	44
Power input P_{ed}	kW	0.38	
Air flow q_v	m ³ /h	1500	
Pressure increase p_{fs}	Pa	406	
Speed n	min ⁻¹	1480	

Data definition with optimum efficiency.



EC centrifugal fan

forward curved, dual inlet
with housing (large flange)

Technical features


Mass	9.9 kg
Size	250 mm
Surface of rotor	Coated in black
Material of electronics housing	Die-cast aluminium
Material of impeller	Sheet steel, galvanised
Housing material	Sheet steel, galvanised
Motor suspension	Motor anti-vibration mounted on one side via brackets
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 20
Insulation class	"B"
Humidity class	F3-1
Max. permissible ambient motor temp. (transp./ storage)	+80 °C
Min. permissible ambient motor temp. (transp./storage)	-40 °C
Mounting position	Shaft horizontal
Cooling bore / aperture	Rotor-side
Operation mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Alarm relay - Motor current limit - PFC, active - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Over-temperature protected electronics / motor - Line undervoltage / phase failure detection
EMC interference immunity	Acc. to EN 61000-6-2 (industrial environment)
EMC harmonics	Acc. to EN 61000-3-2/3
EMC interference emission	Acc. to EN 61000-6-4 (industrial environment)
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) wired internally
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 61800-5-1



EC centrifugal fan

forward curved, dual inlet
with housing (large flange)

Product drawing

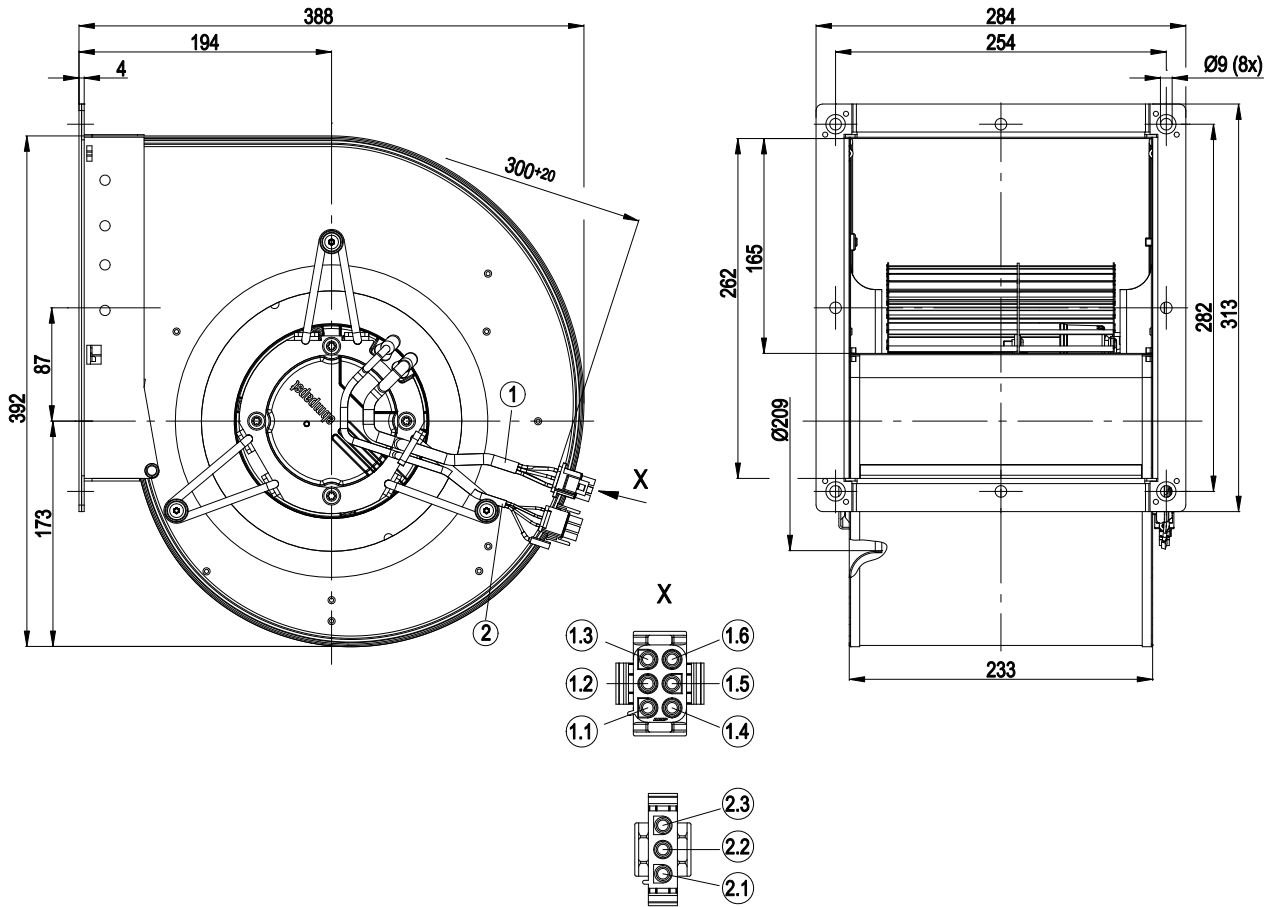


X	View X
1	Connection line PVC AWG 18 with connector shell 6-pole AMP 350 715-4, 5 x plug pin 926883-1 AMP with seal 794276-1 and 794275-1.
1.1	PE (gr / yellow)
1.2	Not assigned
1.3	N (blue)
1.4	L (black)
1.5	NC (like 2)
1.6	COM (like 1)
2	Connection line PVC AWG 22 with connector shell 3-pole AMP 350 766-4, 3 x plug pin 926885-1 AMP with seal 794272-1 and 794271-1.
2.1	0-10V / PWM (yellow)
2.2	+10V (red)
2.3	GND (blue)



EC centrifugal fan

forward curved, dual inlet
with housing (large flange)

Connection screen

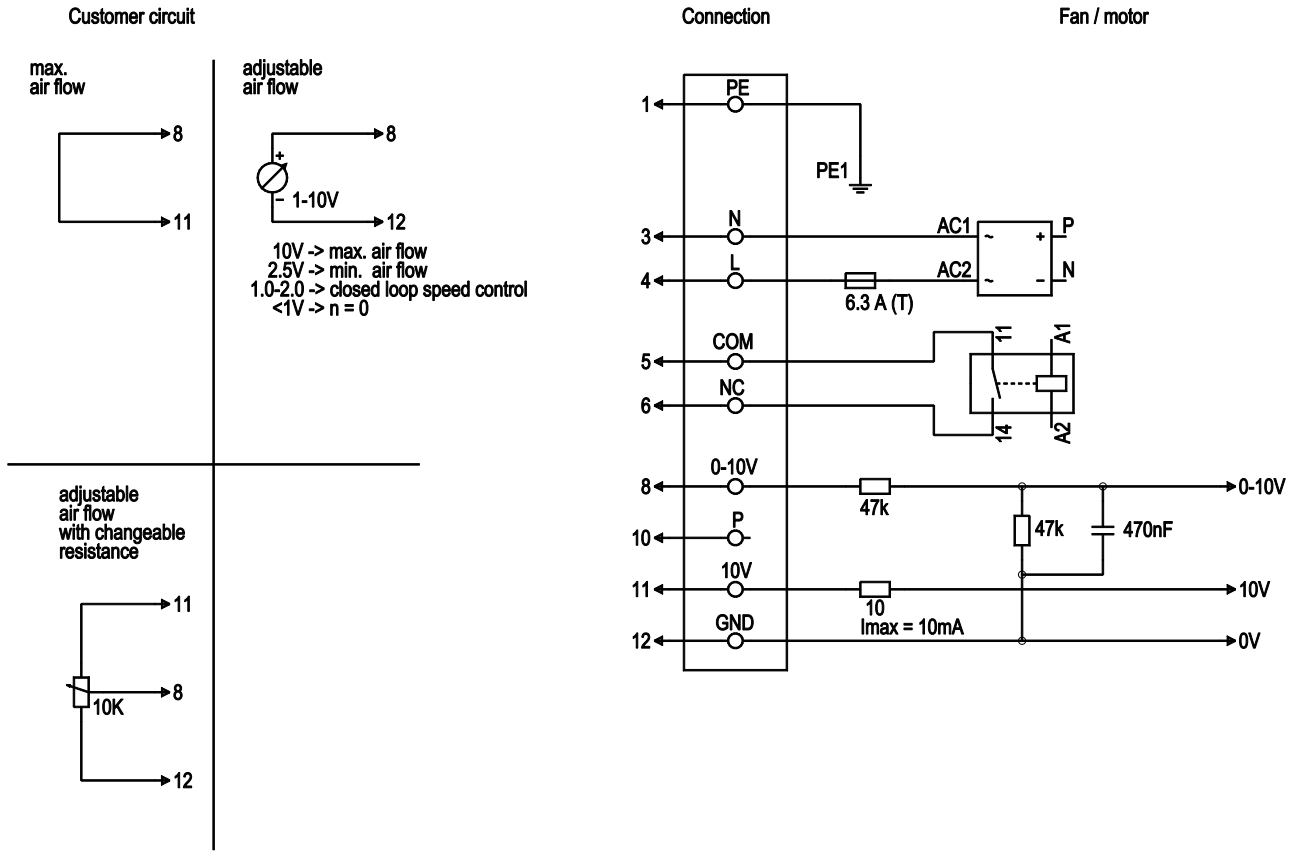


Line	No.	Signal	Colour	Function / assignment
1	1	PE	green/yellow	Protective earth
1	3	N	blue	Supply voltage, neutral conductor, 50 / 60 Hz
1	4	L	black	Supply voltage, phase, 50 / 60 Hz
1	5	COM	white 1	Floating status message contact, for error (2 A, max. 250 VAC, min. 10 mA, AC1)
1	6	NC	white 2	Floating status message contact, for error
2	10	P	orange	For internal use only, not for customers
2	11	10 VDC	red	Voltage output 10 VDC (+/- 3%), max. 10 mA, supply voltage for ext. devices (e.g. potentiometer), SELV
2	12	GND	blue	Reference mass for control interface, SELV
2	8	0 - 10 V	yellow	Control input, set value 0 - 10 VDC, impedance 100 kOhm, SELV



EC centrifugal fan

forward curved, dual inlet
with housing (large flange)

Charts: Air flow 50 Hz

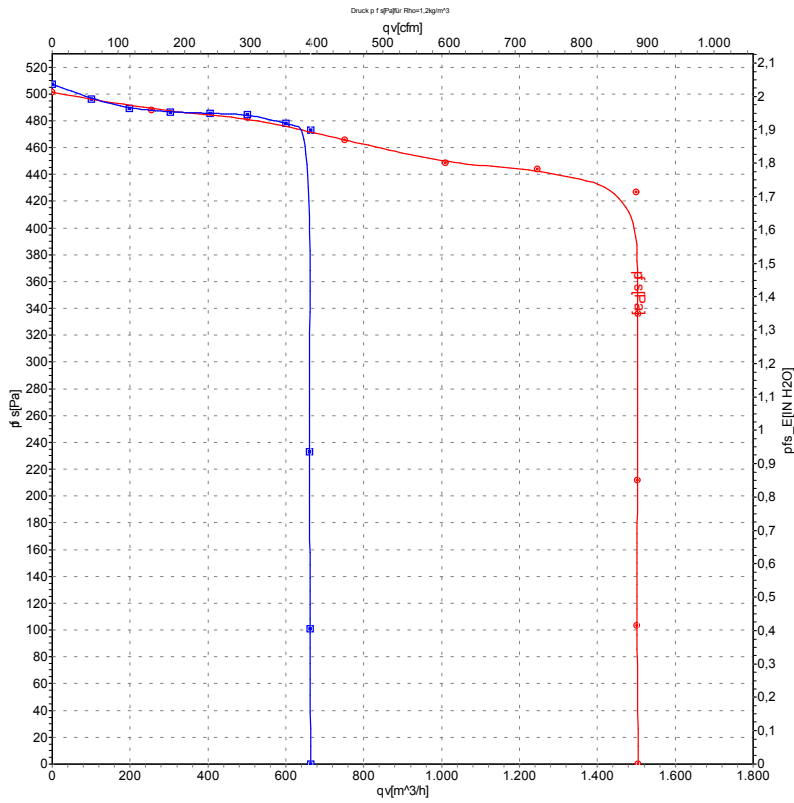

Measurement: LU-112430
Measurement: LU-112432

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: L_{WA} measured as per ISO 13347 / L_{pA} measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

