

# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

D4E133-AH35-61 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

Type	D4E133-AH35-61				
Motor	M4E068-BF				
Phase		1~	1~	1~	1~
Nominal voltage	VAC	115	115	120	127
Frequency	Hz	50	60	60	60
Type of data definition		fa	fa	fa	fa
Valid for approval / standard		CE	CE	UL 2111	CE
Speed	min <sup>-1</sup>	1100	1150	1150	1250
Power input	W	53	60	65	72
Current draw	A	0.48	0.54	0.56	0.58
Motor capacitor	µF	6	6	6	6
Capacitor voltage	VDB	250	250	250	250
Capacitor standard				UL	UL
Min. back pressure	Pa	0	0	0	0
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	50	55	55	50
Starting current	A	0.5	0.6	0.6	0.6

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



D4E133-AH35-61

# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Technical features

<b>Mass</b>	2.3 kg
<b>Size</b>	133 mm
<b>Surface of rotor</b>	Uncoated
<b>Material of impeller</b>	PA plastic
<b>Housing material</b>	Sheet steel, galvanised
<b>Motor suspension</b>	Motor mounted via brackets on one side
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 44; Depending on installation and position
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F0
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	< 0.75 mA
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE




D4E133-AH35-61

# AC centrifugal fan


forward curved, dual inlet  
with housing (without flange)

## Product drawing

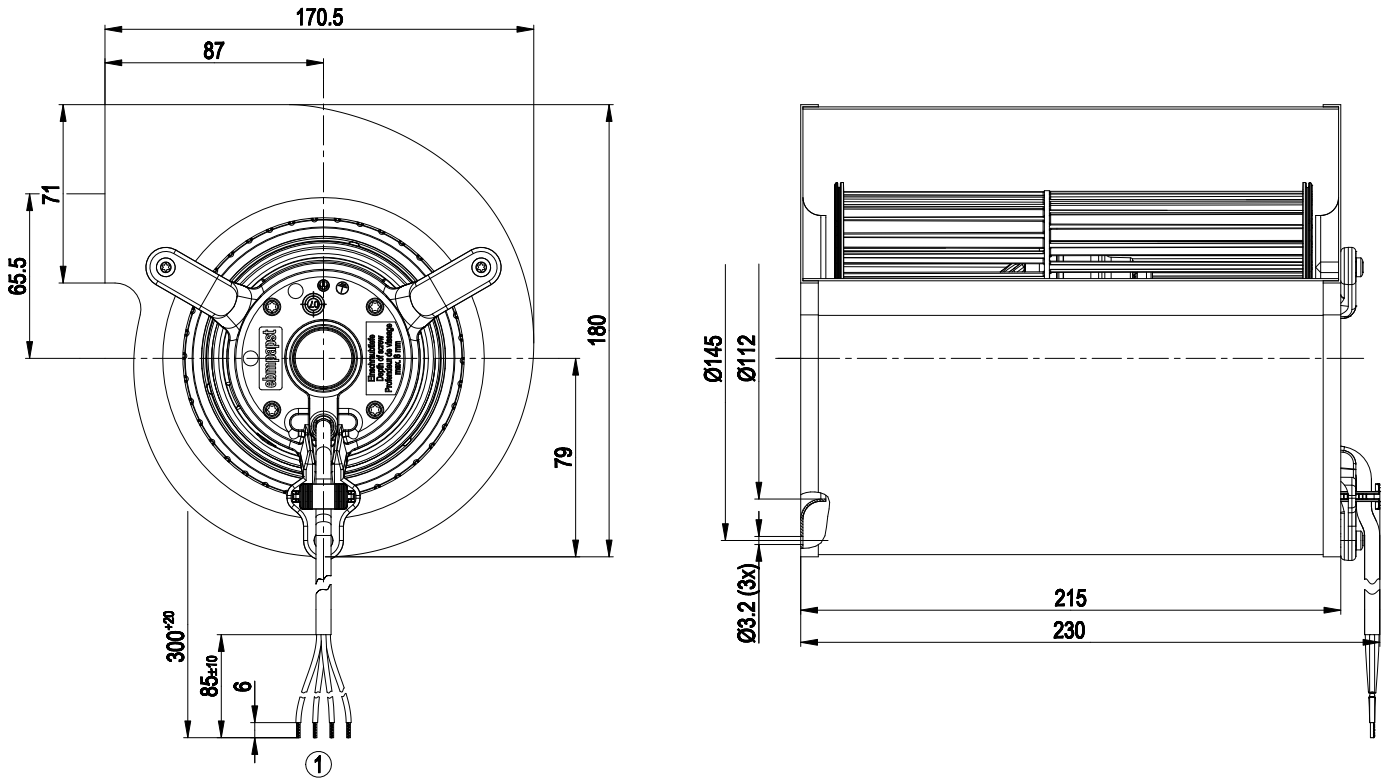

1 Connection line PVC 4G 0.5 mm<sup>2</sup>, 4x brass lead tips crimped

## Connection screen




U1	blue	Z	brown	U2	black
PE	green/yellow				



# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Charts: Air flow 50 Hz

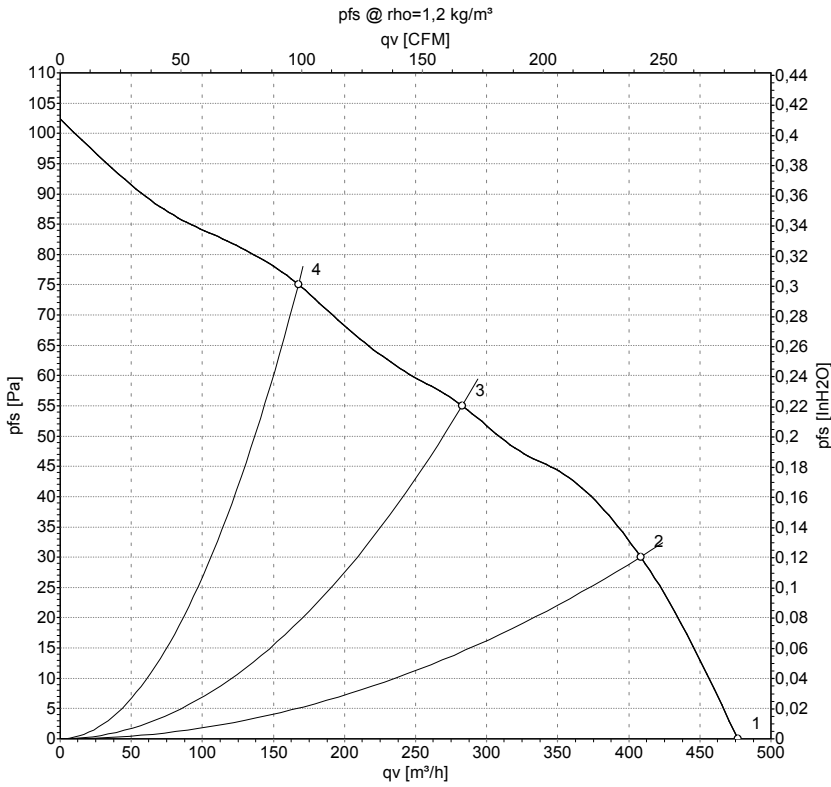

Measurement: LU-139869

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m³/h	Pa
1	115	50	1100	53	0.48	475	0
2	115	50	1175	50	0.44	410	30
3	115	50	1290	46	0.42	285	55
4	115	50	1360	44	0.41	170	75


U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase



# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Charts: Air flow 60 Hz

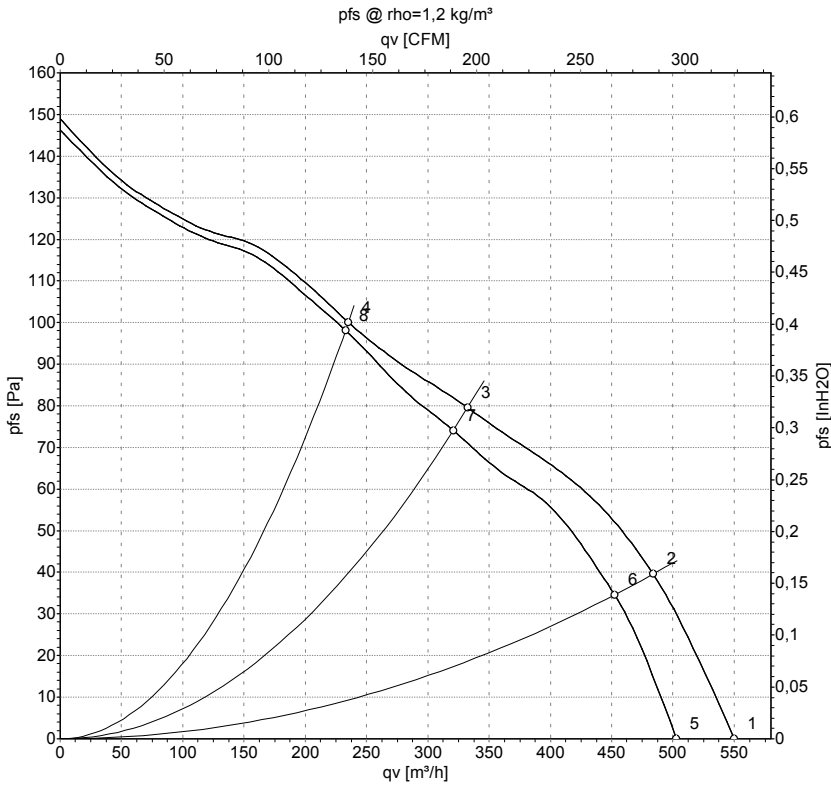

Measurement: LU-139866  
 Measurement: LU-139868

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa
1	127	60	1250	72	0.58	550	0
2	127	60	1365	66	0.52	485	40
3	127	60	1535	59	0.47	330	80
4	127	60	1600	56	0.44	235	100
5	115	60	1150	60	0.54	505	0
6	115	60	1275	57	0.49	450	35
7	115	60	1490	50	0.43	320	74
8	115	60	1585	46	0.40	235	98

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

