

# AC centrifugal fan

forward-curved, dual-intake  
with housing (without flange)

D4E133-DH61-D1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

<b>Type</b>	<b>D4E133-DH61-D1</b>	
<b>Motor</b>	<b>M4E068-BF</b>	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Method of obtaining data		fa
Valid for approval/standard		CE
Speed (rpm)	min <sup>-1</sup>	930
Power consumption	W	80
Current draw	A	0.36
Capacitor	μF	2
Capacitor voltage	VDB	400
Capacitor standard		S2 (CE)
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	55

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC centrifugal fan

forward-curved, dual-intake  
with housing (without flange)

## Technical description

<b>Weight</b>	2.7 kg
<b>Fan size</b>	133 mm
<b>Rotor surface</b>	Unpainted
<b>Impeller material</b>	PA plastic
<b>Housing material</b>	Sheet steel, galvanized
<b>Motor suspension</b>	Motor vibration-damped on both sides
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP44; installation- and position-dependent
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H0 - dry environment
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+ 80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	- 40 °C
<b>Installation position</b>	Any
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Speed levels</b>	5
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	< 0.75 mA
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>With cable</b>	Axial
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 60335-1; CE






# AC centrifugal fan

forward-curved, dual-intake  
with housing (without flange)

## Connection diagram

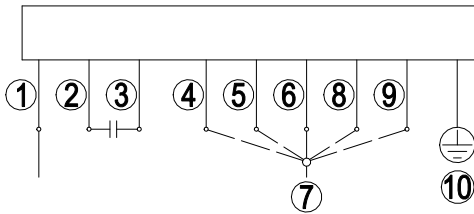


Note: High speed (step IV); low speed (step I)

1	= N = blue
2	brown
3	yellow
4	Step I black 1 / white
5	Step II black 2 / red
6	Step III black 3 / gray
7	L1
8	Step IV black 4 / orange
9	Step V black 5 / black
10	PE (green/yellow)

# AC centrifugal fan

forward-curved, dual-intake  
with housing (without flange)

## Curves: Air performance 50 Hz

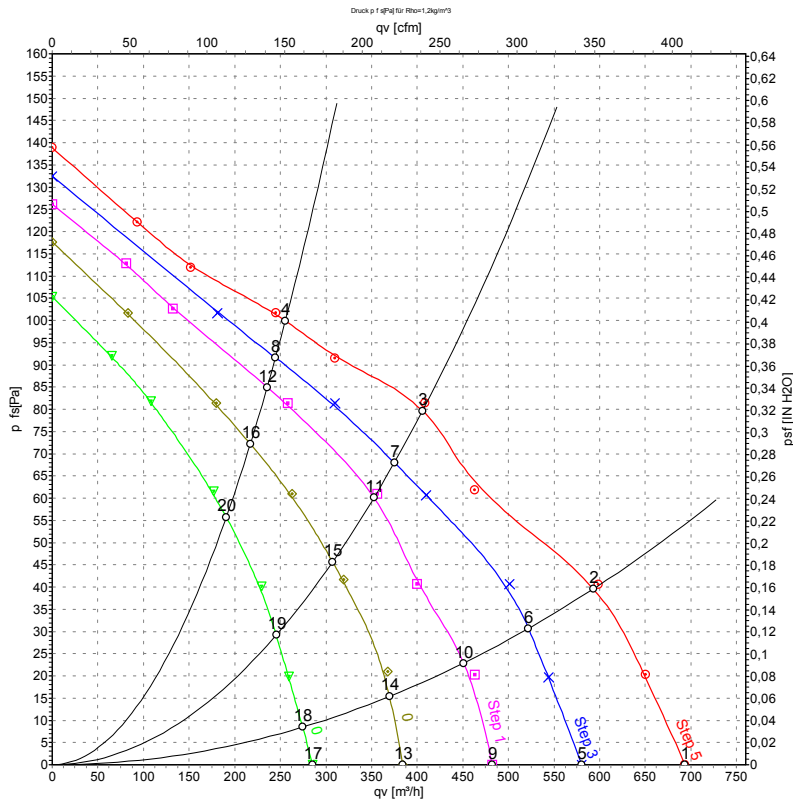

Measurement: LU-24566-1  
Measurement: LU-24567-1  
Measurement: LU-24568-1  
Measurement: LU-24569-1  
Measurement: LU-24570-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Stage	U	f	n	P <sub>e</sub>	I	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa	cfm	in. wg
1	5	230	50	930	80	0.36	695	0	410	0.00
2	5	230	50	1135	74	0.32	595	40	350	0.16
3	5	230	50	1270	69	0.30	405	80	240	0.32
4	5	230	50	1340	67	0.30	255	100	150	0.40
5	4	230	50	820	68	0.30	580	0	340	0.00
6	4	230	50	990	63	0.28	520	31	305	0.12
7	4	230	50	1195	57	0.25	375	68	220	0.27
8	4	230	50	1295	55	0.24	245	92	145	0.37
9	3	230	50	690	61	0.27	480	0	285	0.00
10	3	230	50	900	57	0.26	450	24	265	0.10
11	3	230	50	1115	52	0.23	350	62	205	0.25
12	3	230	50	1240	48	0.21	235	85	140	0.34
13	2	230	50	565	53	0.24	385	0	225	0.00
14	2	230	50	750	51	0.23	370	19	220	0.08
15	2	230	50	985	46	0.21	305	46	180	0.18
16	2	230	50	1150	42	0.20	215	72	130	0.29
17	1	230	50	420	46	0.21	285	0	170	0.00
18	1	230	50	545	45	0.21	275	8	160	0.03
19	1	230	50	795	42	0.20	245	29	145	0.12
20	1	230	50	1010	38	0.18	190	56	110	0.22

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

