

# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

D4E160-HN48-10 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

<b>Type</b>	<b>D4E160-HN48-10</b>	
<b>Motor</b>	<b>M4E068-CF</b>	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Type of data definition		ml
Valid for approval / standard		CE
Speed	min <sup>-1</sup>	1280
Power input	W	93
Current draw	A	0.42
Motor capacitor	µF	2
Capacitor voltage	VDB	450
Capacitor standard		P2 (CE)
Min. back pressure	Pa	100
Max. ambient temperature	°C	40

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



D4E160-HN48-10

# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Technical features


<b>Mass</b>	2.55 kg
<b>Size</b>	160 mm
<b>Surface of rotor</b>	Uncoated
<b>Material of impeller</b>	PP plastic, fibreglass-reinforced
<b>Housing material</b>	Plastic PA6, fibreglass-reinforced; sheet steel, hot-galvanised
<b>Motor suspension</b>	Motor anti-vibration mounted on both sides
<b>Direction of rotation</b>	Counter-clockwise, seen on rotor
<b>Type of protection</b>	IP 44; Depending on installation and position
<b>Insulation class</b>	"F"
<b>Humidity class</b>	F0
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Shaft horizontal
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Calotte bearing
<b>Speed steps</b>	2
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	< 0.75 mA
<b>Electrical leads</b>	With plug
<b>Motor protection</b>	Thermal overload protector (TOP) wired internally
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1; CE



# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Product drawing

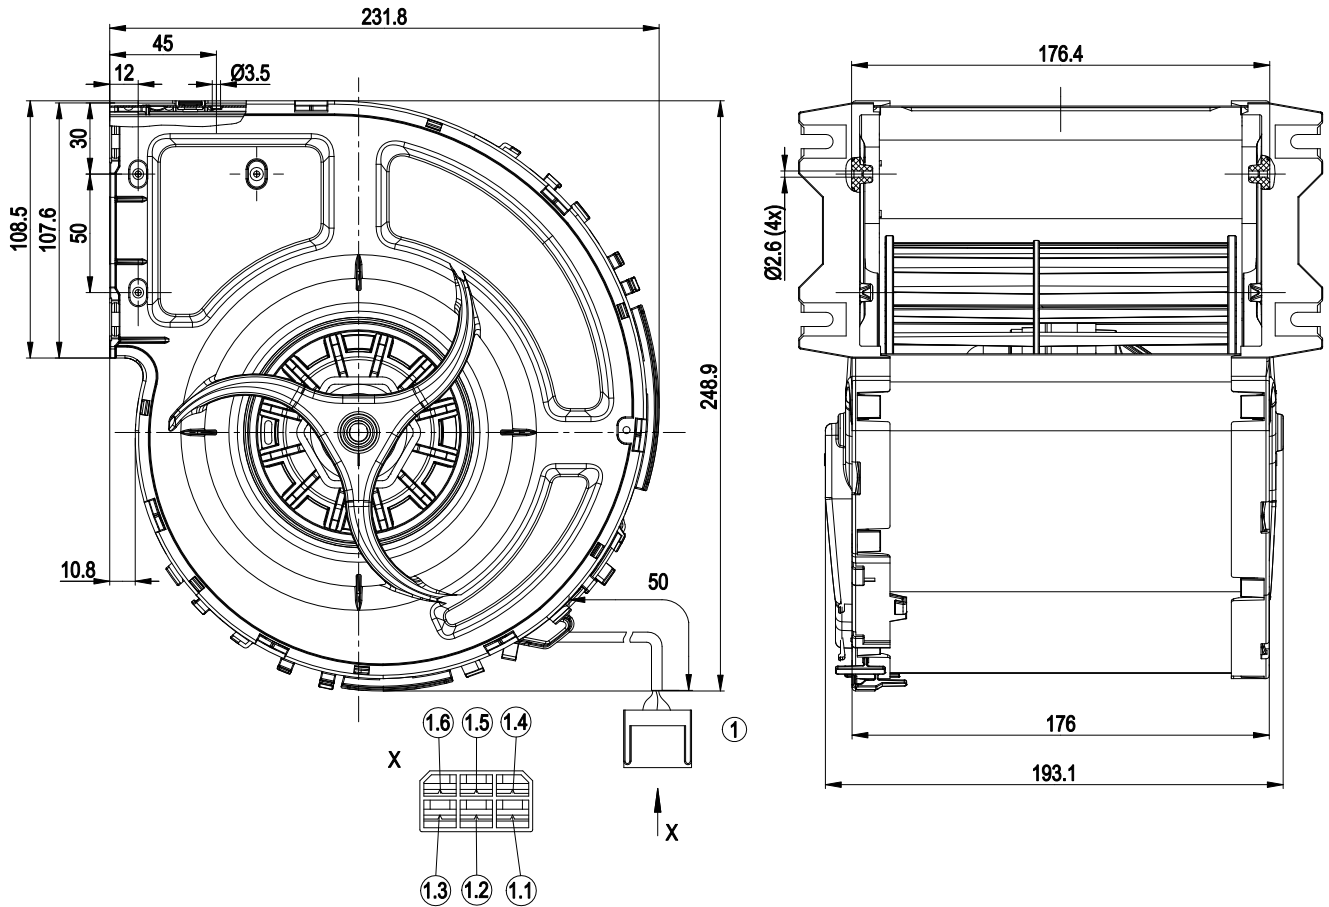


Line	No.	Signal	Colour	Function / assignment
		1		Connector shell INARCA 0854081700
		1.1	yellow	Capacitor
		1.2	black	Step 2 (max.)
		1.3	blue	N
		1.4	brown	Capacitor
		1.5	white	Step 1 (min.)
		1.6	green/yellow	Protective earth



# AC centrifugal fan

forward curved, dual inlet  
with housing (without flange)

## Connection screen

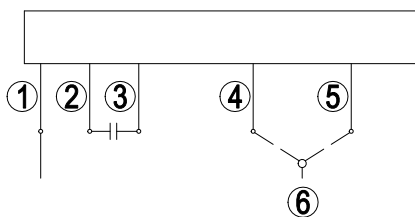


Note: Fast speed (step II); slow speed (step I)

1	= N = blue	2	brown	3	yellow
4	Step I white	5	Step II black	6	L1



## Charts: Air flow 50 Hz

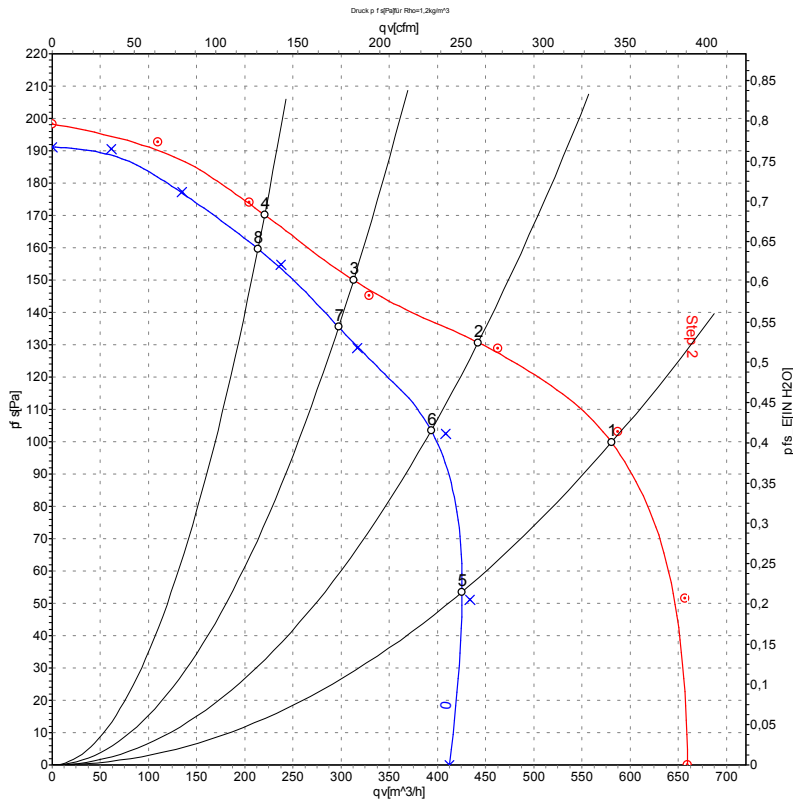

Measurement: LU-38542  
Measurement: LU-38543

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	Stage	U	f	n	P <sub>e</sub>	I	qv	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa
1	2	230	50	1280	93	0.42	580	100
2	2	230	50	1365	80	0.35	440	130
3	2	230	50	1405	73	0.33	315	150
4	2	230	50	1425	69	0.31	220	170
5	1	230	50	800	88	0.38	425	32
6	1	230	50	1235	70	0.31	395	107
7	1	230	50	1335	61	0.27	295	135
8	1	230	50	1380	56	0.25	215	160

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

