

# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

D4E200-BA05-52 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	D4E200-BA05-52	
Motor	M4E068-LA	
Phase		1~
Nominal voltage	VAC	240
Frequency	Hz	50
Type of data definition		fa
Valid for approval / standard		CE
Speed	min <sup>-1</sup>	1040
Power input	W	400
Current draw	A	1.68
Motor capacitor	μF	8
Capacitor voltage	VDB	400
Capacitor standard		P0 (CE)
Min. back pressure	Pa	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	45
Starting current	A	2.41

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

\* Specific ratio =  $1 + p_b / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency $\eta_{es}$	%	33.5	26.5	33.5
Efficiency grade N		44	37	44
Power input $P_e$	kW	0.22		
Air flow $q_v$	m <sup>3</sup> /h	1205		
Pressure increase $p_{fs}$	Pa	224		
Speed n	min <sup>-1</sup>	1315		

Data definition with optimum efficiency. LU-161528  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.



# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

## Technical features


<b>Mass</b>	11.4 kg
<b>Size</b>	200 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of impeller</b>	Sheet steel, galvanised
<b>Housing material</b>	Sheet steel, galvanised
<b>Motor suspension</b>	Motor mounted anti-vibration on both sides
<b>Direction of rotation</b>	Counter-clockwise, seen on rotor
<b>Type of protection</b>	IP 54; Depending on installation and position
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F3-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)</b>	< 0.75 mA
<b>Motor protection</b>	Thermal overload protector (TOP) brought out
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1



# AC centrifugal fan


forward curved, dual inlet  
with housing (flange)

## Product drawing

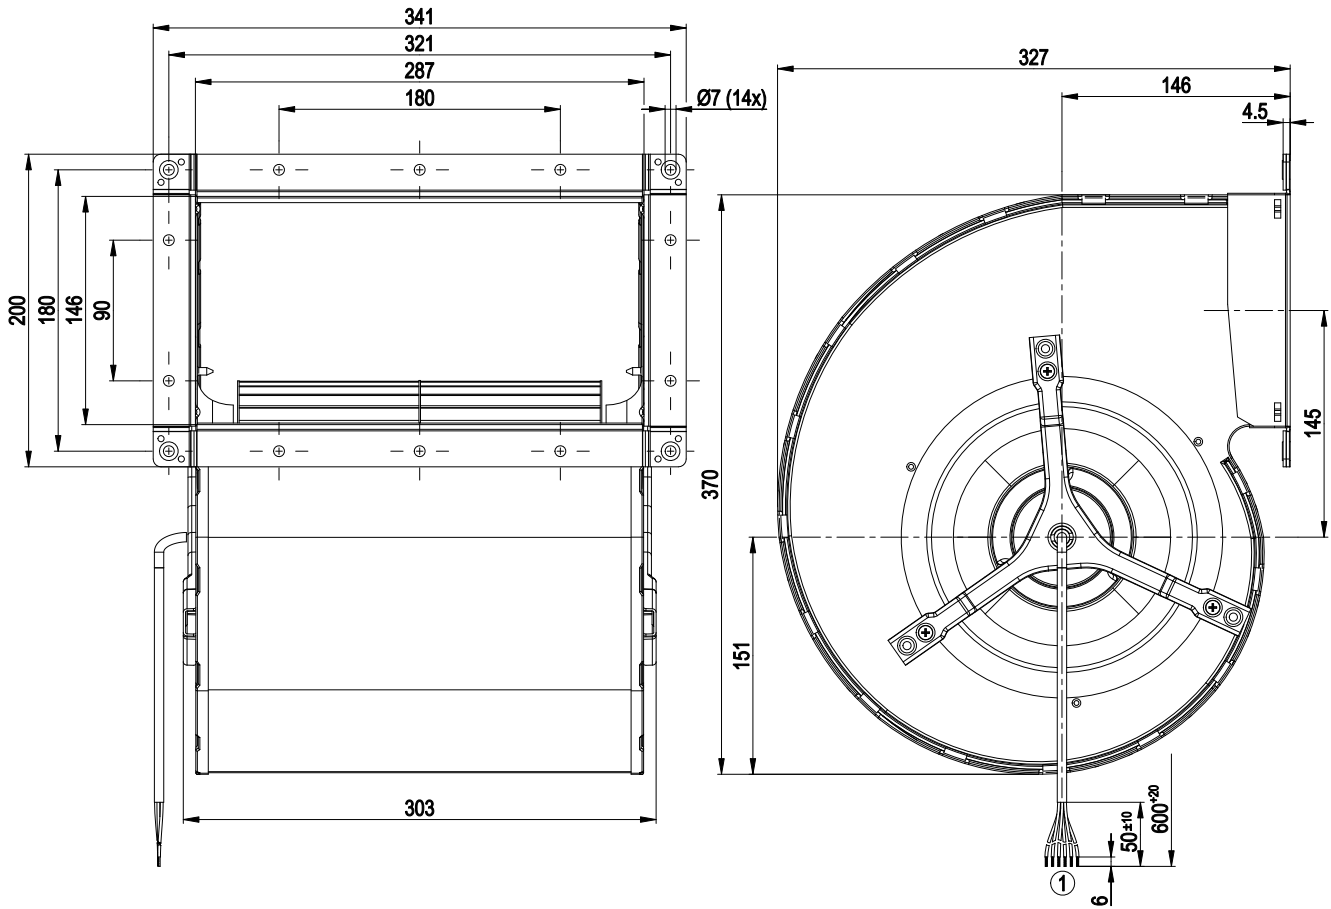

1 Connection line PVC 6G 0.5 mm<sup>2</sup>, 6x lead tips crimped

## Connection screen




U1	Blue	Z	brown	U2	black
PE	green/yellow	TOP	2 x grey		



# AC centrifugal fan

forward curved, dual inlet  
with housing (flange)

## Charts: Air flow 50 Hz

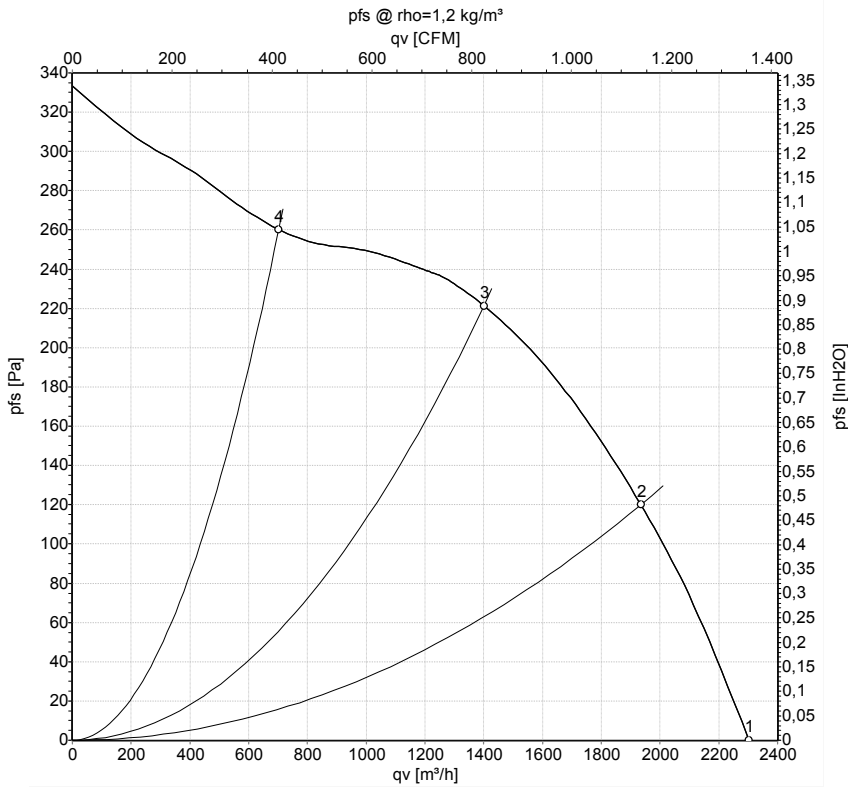

Measurement: LU-161784

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	f	n	P <sub>e</sub>	I	qv	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	m <sup>3</sup> /h	Pa
1	240	50	1040	400	1.68	2305	0
2	240	50	1190	320	1.34	1935	120
3	240	50	1305	254	1.07	1400	220
4	240	50	1385	191	0.82	700	260

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

