

# AC centrifugal fan

forward-curved, dual-intake  
with housing (flange)



D4E225-BC01-29 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                             |                   |         |         |
|-----------------------------|-------------------|---------|---------|
| Type                        | D4E225-BC01-29    |         |         |
| Motor                       | M4E074-LA         |         |         |
| Phase                       |                   | 1~      | 1~      |
| Nominal voltage             | VAC               | 230     | 230     |
| Frequency                   | Hz                | 50      | 60      |
| Method of obtaining data    |                   | ml      | ml      |
| Valid for approval/standard |                   | -       | -       |
| Speed (rpm)                 | min <sup>-1</sup> | 1100    | 1300    |
| Power consumption           | W                 | 700     | 670     |
| Current draw                | A                 | 3.05    | 2.75    |
| Capacitor                   | μF                | 25      | 16      |
| Capacitor voltage           | VDB               | 400     | 400     |
| Capacitor standard          |                   | S2 (CE) | S2 (CE) |
| Min. back pressure          | Pa                | 60      | 250     |
| Min. back pressure          | in. wg            | 0.24    | 1       |
| Min. ambient temperature    | °C                | -25     | -25     |
| Max. ambient temperature    | °C                | 50      | 50      |
| Starting current            | A                 | 4.5     |         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change



# AC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Technical description


|                                                                            |                                                       |
|----------------------------------------------------------------------------|-------------------------------------------------------|
| Weight                                                                     | 12.8 kg                                               |
| Size                                                                       | 225 mm                                                |
| Motor size                                                                 | 74                                                    |
| Rotor surface                                                              | Unpainted                                             |
| Impeller material                                                          | Sheet steel, galvanized                               |
| Housing material                                                           | Sheet steel, galvanized                               |
| Support structure material                                                 | Sheet steel, galvanized                               |
| Motor suspension                                                           | Motor vibration-damped on both sides                  |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                 |
| Degree of protection                                                       | IP22                                                  |
| Insulation class                                                           | "F"                                                   |
| Moisture (F) / Environmental (H) protection class                          | H0+                                                   |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                               |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                               |
| Installation position                                                      | Any                                                   |
| Condensation drainage holes                                                | None                                                  |
| Mode                                                                       | S1                                                    |
| Motor bearing                                                              | Ball bearing                                          |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                             |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected |
| With cable                                                                 | Axial                                                 |
| Protection class                                                           | I (with customer connection of protective earth)      |
| Conformity with standards                                                  | EN 60335-1; EN 60034-1; EN 60204-1                    |
| Approval                                                                   | CSA C22.2 No. 100; UL 1004-1                          |



# AC centrifugal fan


forward-curved, dual-intake  
with housing (flange)

## Product drawing

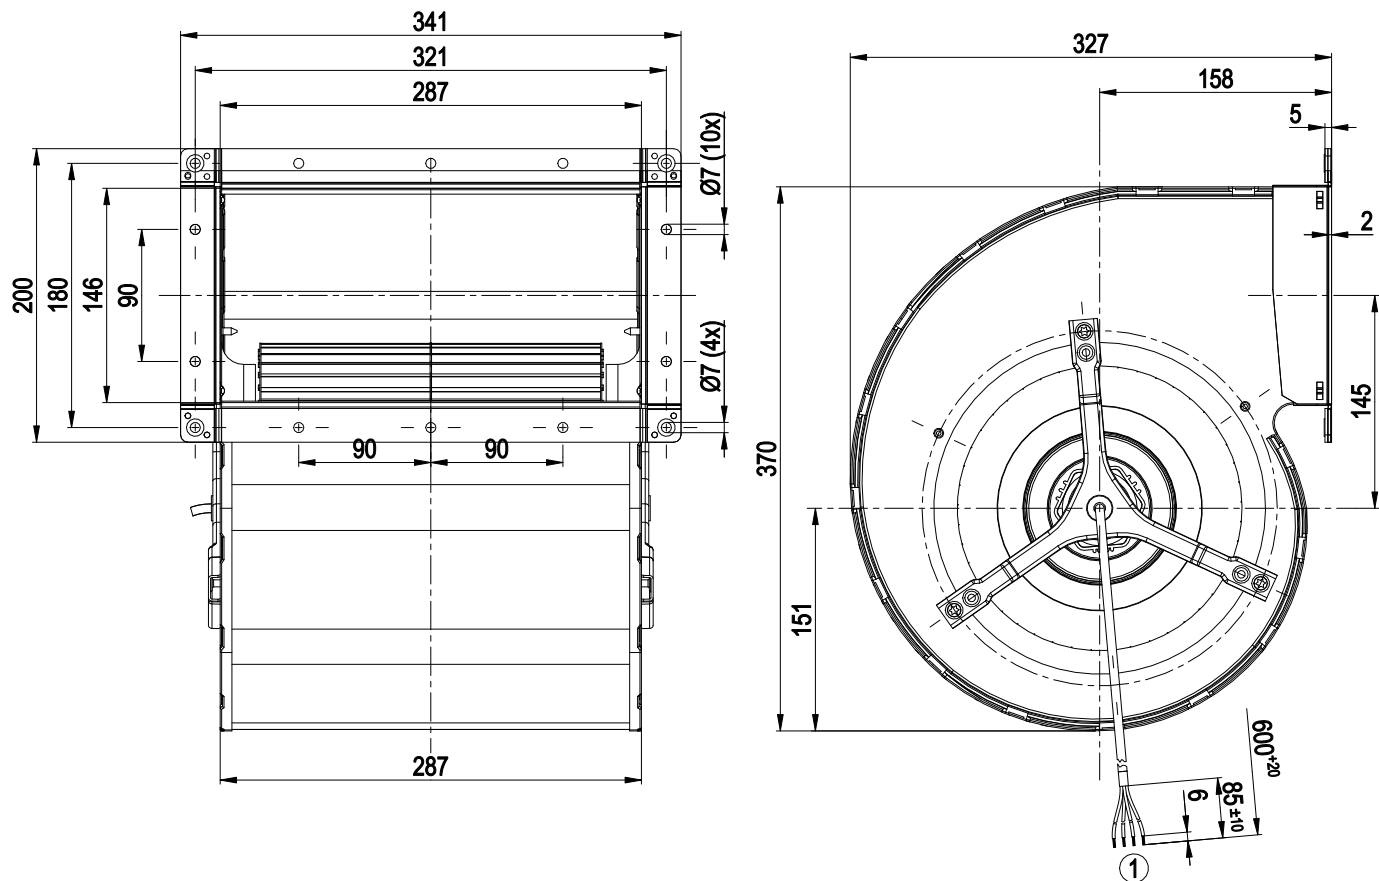

|   |                    |           |
|---|--------------------|-----------|
| 1 | Cable PFA AWG20 4G | 4x splice |
|---|--------------------|-----------|

## Connection diagram




|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |



# AC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Curves: Air performance 50 Hz

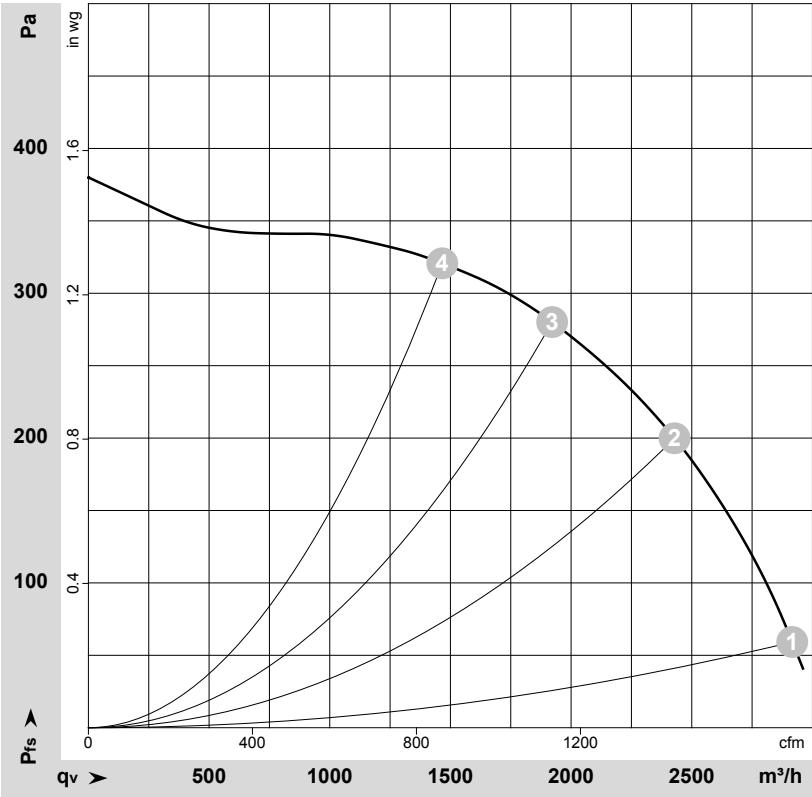

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-105284-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub>    | p <sub>fs</sub> | q <sub>V</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 50 | 1100              | 700            | 3.05 | 2915              | 60              | 1715           | 0.24            |
| 2 | 230 | 50 | 1300              | 590            | 2.67 | 2430              | 200             | 1430           | 0.80            |
| 3 | 230 | 50 | 1360              | 510            | 2.37 | 1920              | 280             | 1130           | 1.12            |
| 4 | 230 | 50 | 1395              | 447            | 2.14 | 1465              | 320             | 865            | 1.28            |


U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>V</sub> = Air flow · p<sub>fs</sub> = Pressure increase



# AC centrifugal fan

forward-curved, dual-intake  
with housing (flange)

## Curves: Air performance 60 Hz

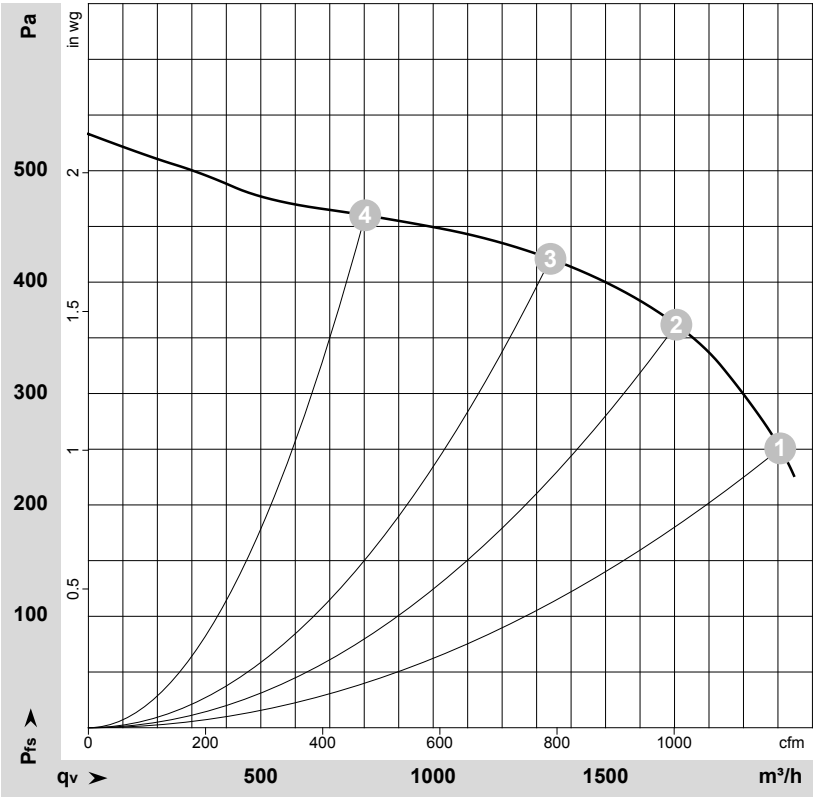

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-35319-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>V</sub>    | p <sub>fs</sub> | q <sub>V</sub> | p <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | 230 | 60 | 1300              | 630            | 2.75 | 2005              | 250             | 1180           | 1.00            |
| 2 | 230 | 60 | 1470              | 548            | 2.41 | 1705              | 360             | 1005           | 1.45            |
| 3 | 230 | 60 | 1570              | 470            | 2.11 | 1340              | 420             | 790            | 1.69            |
| 4 | 230 | 60 | 1655              | 384            | 1.81 | 805               | 460             | 475            | 1.85            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>V</sub> = Air flow · p<sub>fs</sub> = Pressure increase

