

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)



D4E225-EH01-07 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D4E225-EH01-07		
Motor	M4E094-LA		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	60	60
Method of obtaining data		ml	ml
Valid for approval/standard		UL	CE
Speed (rpm)	min ⁻¹	1410	1410
Power consumption	W	1130	1085
Current draw	A	4.72	5.24
Capacitor	µF	10	10
Capacitor voltage	VDB	450	500
Capacitor standard		UL	
Min. back pressure	Pa	200	200
Min. back pressure	inH ₂ O	0.8	0.8
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	45	45
Starting current	A	5.4	5.2

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Technical description


Weight	16 kg
Fan size	225 mm
Rotor surface	Cast in aluminum
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60034-1 (2010); CE
Approval	CSA C22.2 No. 100; UL 1004-1



AC centrifugal fan


forward-curved, dual-intake
with housing (flange)

Product drawing

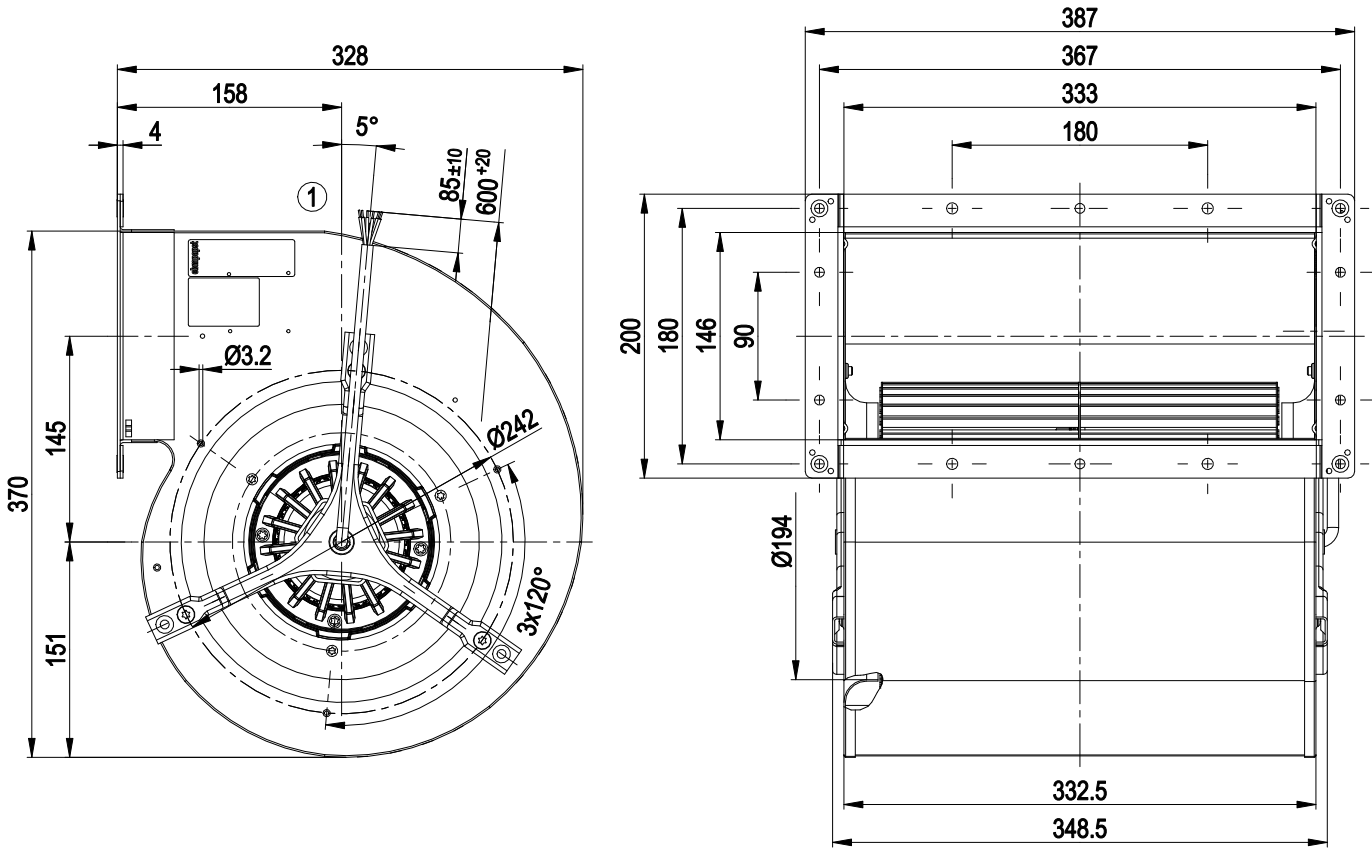

1 Cable PFA AWG18

Connection diagram

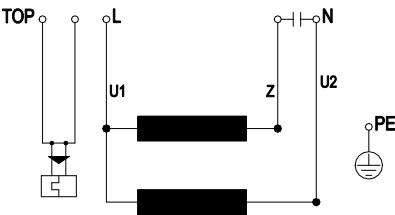

TOP	2x gray	U1	blue	Z	brown
U2	black	PE	green/yellow		




AC centrifugal fan

forward-curved, dual-intake

with housing (flange)

Curves: Air performance 60 Hz

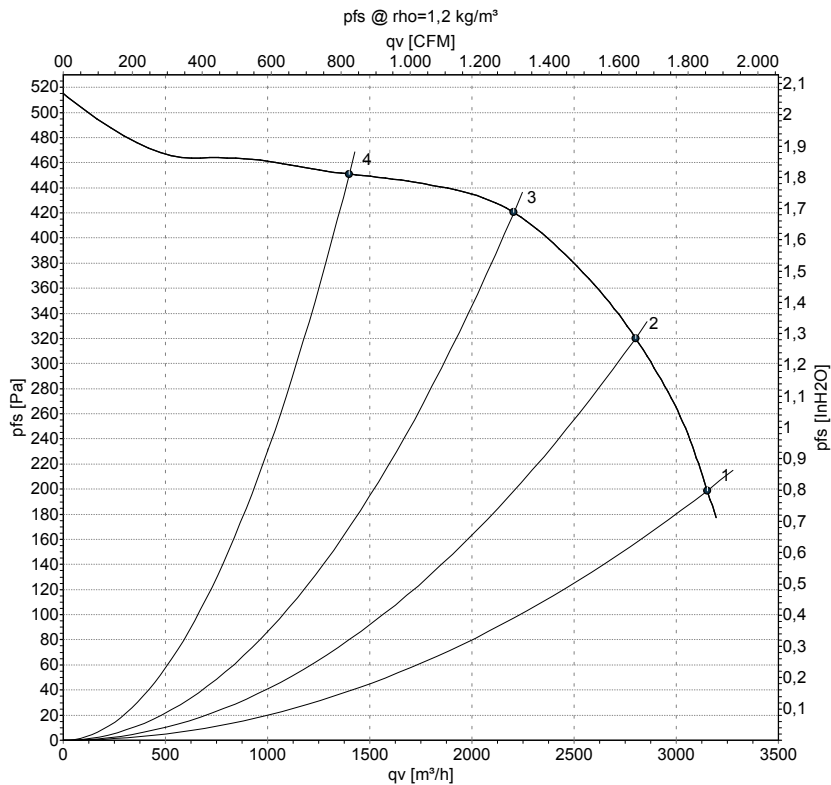

Measurement: LU-41782-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	60	1410	1085	5.24	3150	200	1855	0.80
2	230	60	1550	911	4.24	2800	320	1650	1.28
3	230	60	1640	716	3.27	2205	420	1300	1.69
4	230	60	1700	545	2.48	1400	450	825	1.81

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

