

AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

D4E250-AA01-05 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D4E250-AA01-05	
Motor	M4E094-LA	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50
Method of obtaining data		ml
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1200
Power consumption	W	1180
Current draw	A	5.6
Capacitor	µF	14
Capacitor voltage	VDB	500
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_e	%	43.6	41.6
02 Measurement category		B	
03 Efficiency category		Total	
04 Efficiency grade N		51	49
05 Variable speed drive		No	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.68
09 Air flow q_v	m³/h	2395
09 Pressure increase p_f	Pa	452
10 Speed (rpm) n	min ⁻¹	1390
11 Specific ratio*		1.00

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$

LU-203268



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Technical description


Weight	16 kg
Size	250 mm
Motor size	94
Rotor surface	Cast in aluminum
Blade material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Lateral
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60034-1 (2010); CE
Approval	EAC



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)


Product drawing

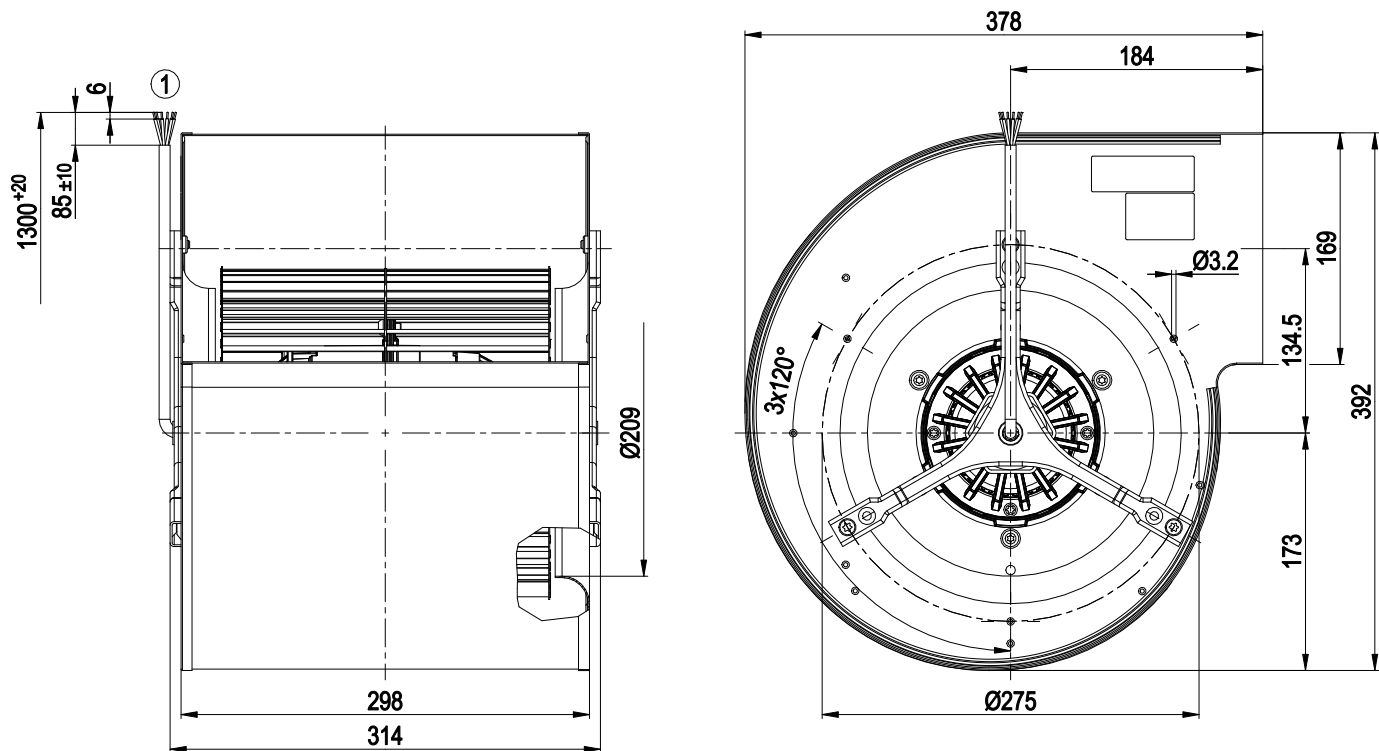

1 Cable ETFE AWG18

6x splice

Connection diagram

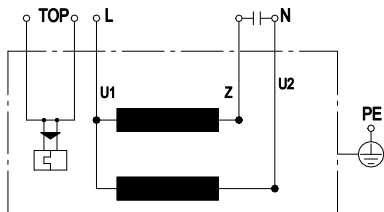


U1	blue	Z	brown	U2	black
PE	green/yellow	TOP	2x gray		



AC centrifugal fan

forward-curved, dual-intake
with housing (without flange)

Curves: Air performance 50 Hz

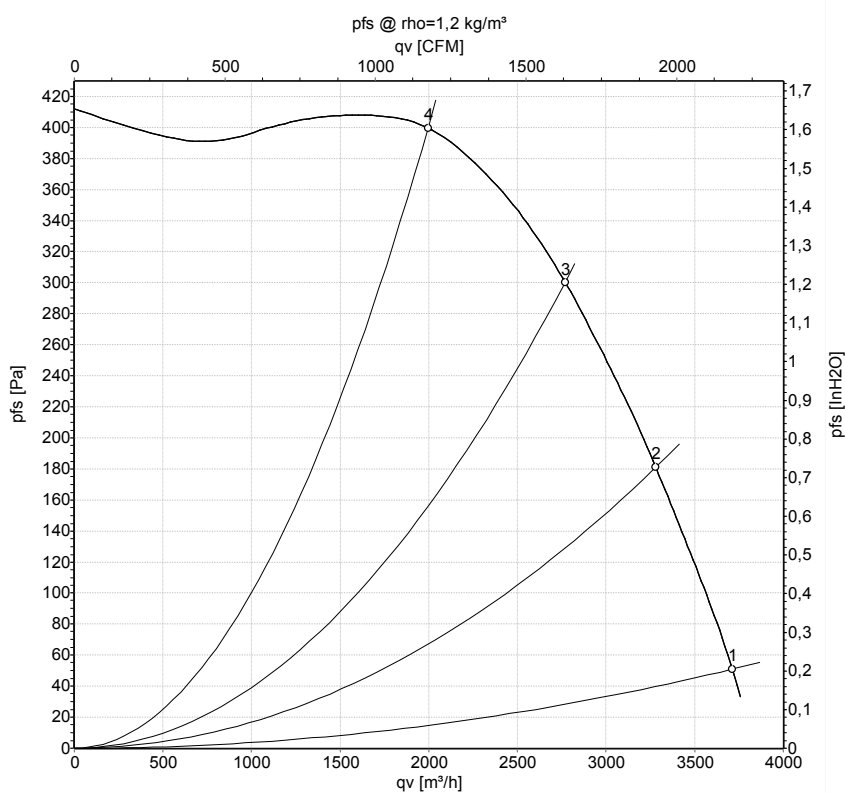

Measurement: LU-66744-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	1200	1180	5.60	3710	50	2185	0.20
2	230	50	1320	958	4.66	3280	180	1930	0.72
3	230	50	1370	800	3.95	2770	300	1630	1.20
4	230	50	1415	611	3.18	1995	400	1175	1.61

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

