

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)



D4E250-BA01-11 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	D4E250-BA01-11		
Motor	M4E094-LA		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	1210	1460
Power consumption	W	1240	1230
Current draw	A	6	5.54
Capacitor	µF	14	14
Capacitor voltage	VDB	500	500
Capacitor standard		S0 (CE)	S0 (CE)
Min. back pressure	Pa	0	300
Min. back pressure	in. wg	0	1.2
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	40	45
Starting current	A	15	12.5

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_e	%	43.6	41.7	09 Power consumption P_e	kW	0.69
02 Measurement category		B		09 Air flow q_v	m ³ /h	2405
03 Efficiency category		Total		09 Pressure increase p_f	Pa	455
04 Efficiency grade N		50.9	49	10 Speed (rpm) n	min ⁻¹	1390
05 Variable speed drive		No		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$ LU-203244



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Technical description


Weight	17.4 kg
Size	250 mm
Motor size	94
Rotor surface	Cast in aluminum
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Conformity with standards	EN 60034-1 (2010); CE
Approval	EAC



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Product drawing

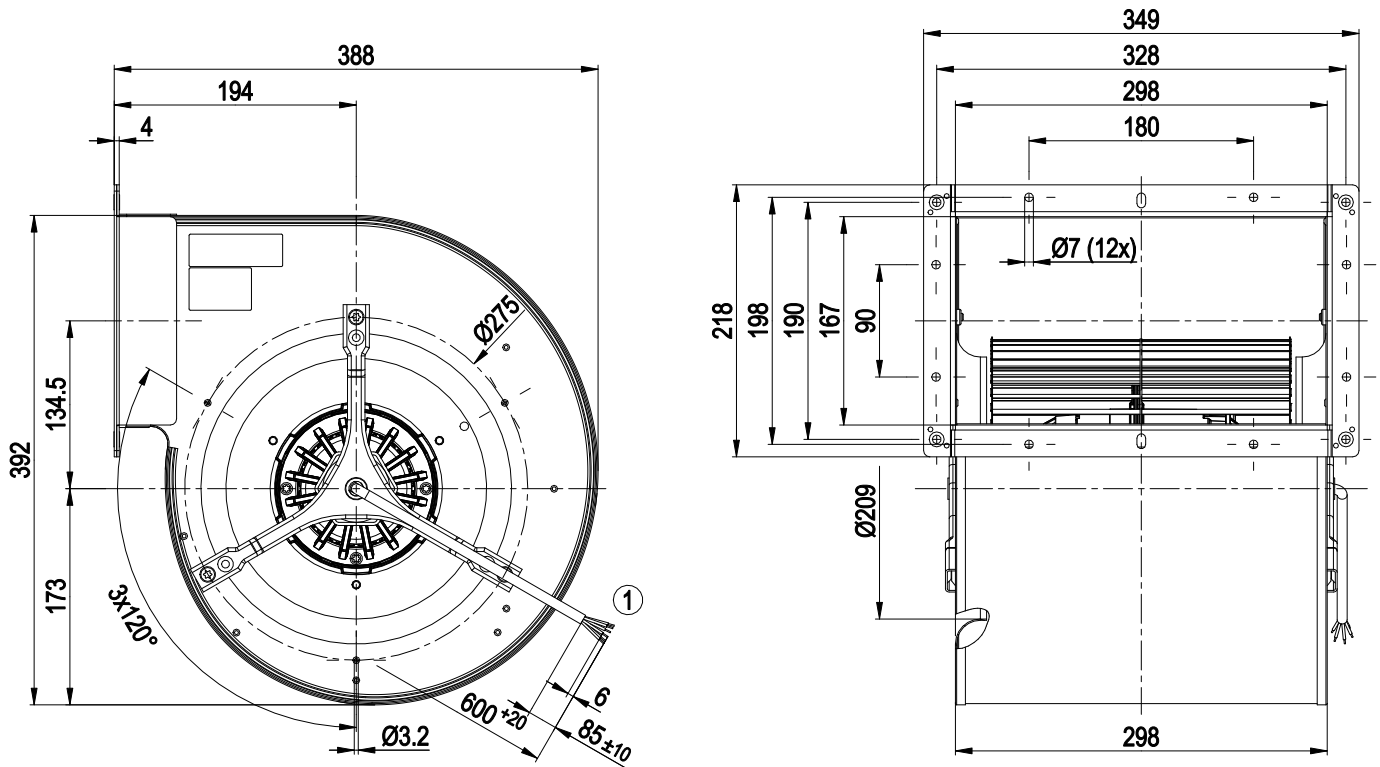


1 Cable PFA AWG18

AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Connection diagram

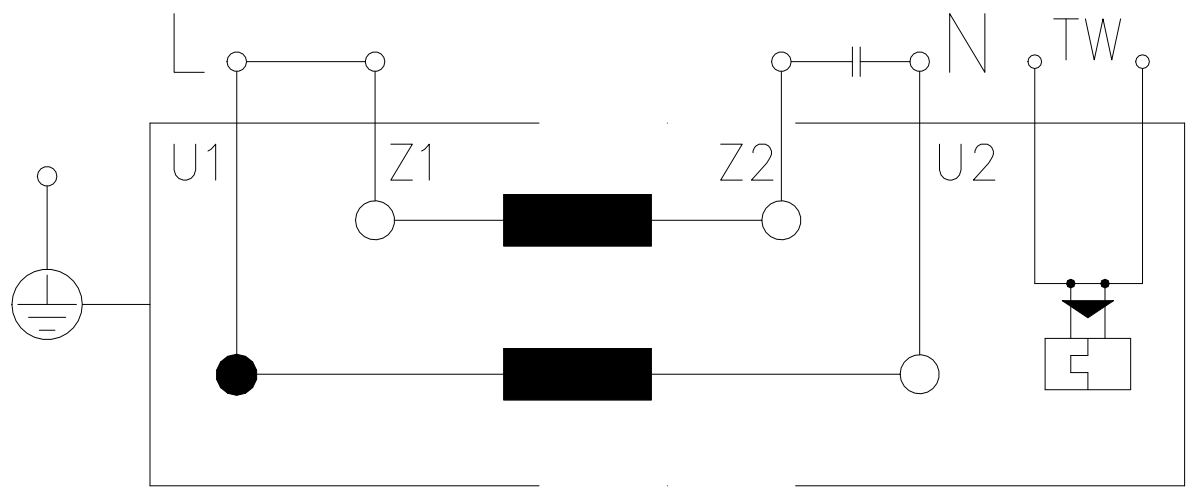


PE	green/yellow	L	= U1 = brown	Z1	black
Z2	orange	N	= U2 = blue	TW	2x white



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 50 Hz

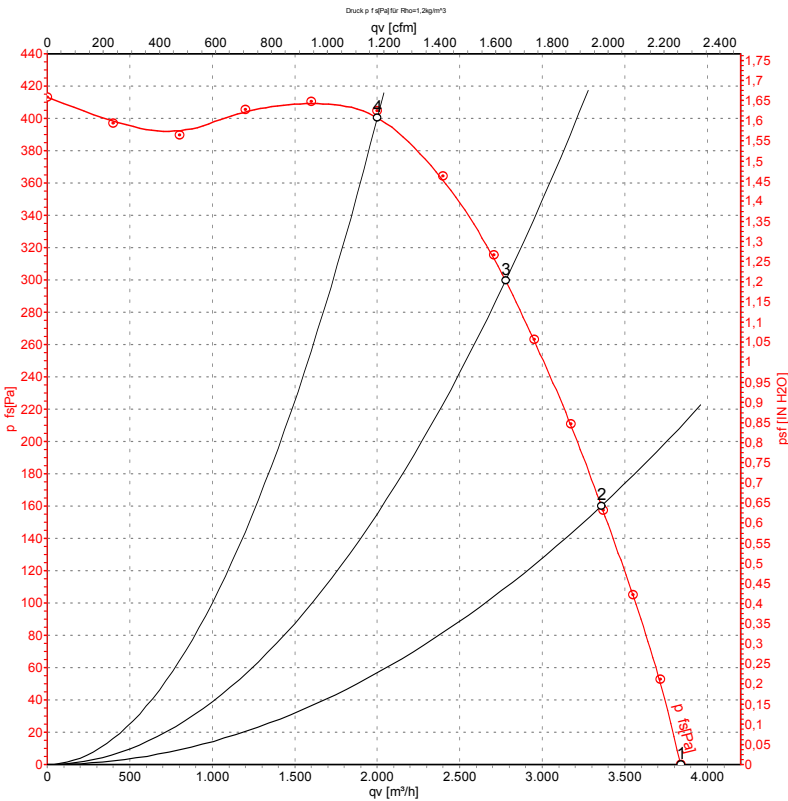

Measurement: LU-66744-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	in. wg
1	230	50	1210	1240	6.00	3840	0	2260	0.00
2	230	50	1310	978	4.76	3360	160	1975	0.64
3	230	50	1365	803	3.96	2780	300	1635	1.20
4	230	50	1415	612	3.18	2000	400	1175	1.61


U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase



AC centrifugal fan

forward-curved, dual-intake
with housing (flange)

Curves: Air performance 60 Hz

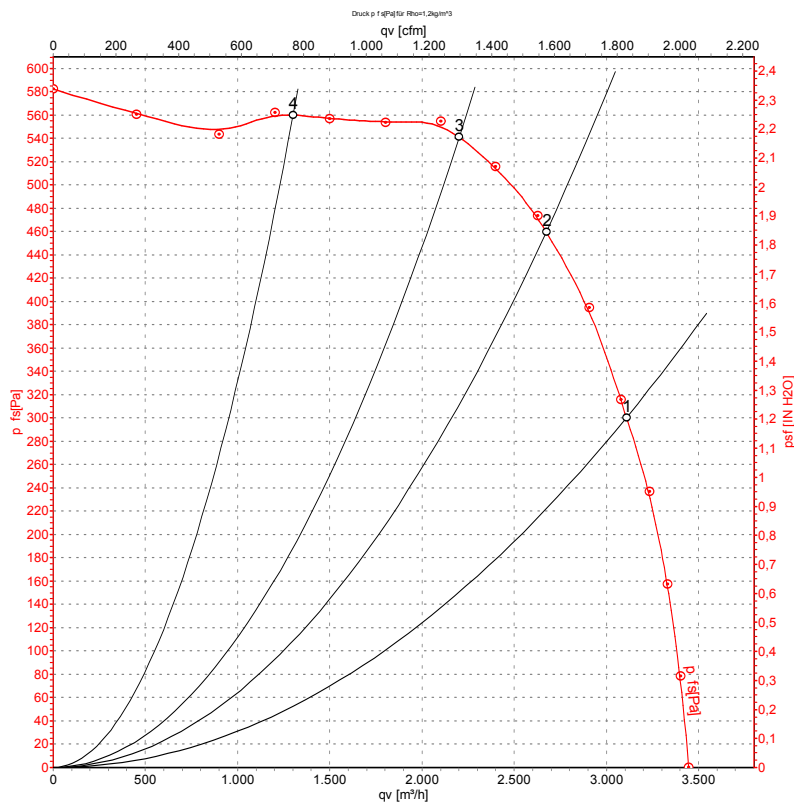

Measurement: LU-66745-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	60	1460	1230	5.54	3110	300	1830	1.20
2	230	60	1565	1040	4.63	2675	460	1575	1.85
3	230	60	1630	902	3.96	2200	540	1295	2.17
4	230	60	1700	747	3.25	1300	560	765	2.25

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase