

# AC centrifugal fan

forward curved, single inlet

with housing (flange)

G2D120-AA04-10 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

| Type                          | G2D120-AA04-10    |          |          |      |      |
|-------------------------------|-------------------|----------|----------|------|------|
| Motor                         | M2D068-BF         |          |          |      |      |
| Phase                         |                   | 3~       | 3~       | 3~   | 3~   |
| Nominal voltage               | VAC               | 230      | 230      | 400  | 400  |
| Connection                    |                   | $\Delta$ | $\Delta$ | Y    | Y    |
| Frequency                     | Hz                | 50       | 60       | 50   | 60   |
| Type of data definition       |                   | fa       | fa       | fa   | fa   |
| Valid for approval / standard |                   | CE       | CE       | CE   | CE   |
| Speed                         | min <sup>-1</sup> | 2300     | 2350     | 2300 | 2350 |
| Power input                   | W                 | 65       | 75       | 65   | 75   |
| Current draw                  | A                 | 0.21     | 0.21     | 0.12 | 0.12 |
| Min. back pressure            | Pa                | 0        | 0        | 0    | 0    |
| Min. ambient temperature      | °C                | -25      | -25      | -25  | -25  |
| Max. ambient temperature      | °C                | 65       | 70       | 65   | 70   |
| Starting current              | A                 | 0.4      | 0.38     | 0.23 | 0.22 |

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations



# AC centrifugal fan

forward curved, single inlet  
with housing (flange)

## Technical features


|  |  |
|--|--|
| Mass   | 2.3 kg   |
| Size   | 120 mm   |
| Surface of rotor   | Uncoated   |
| Material of terminal box   | Die-cast aluminium                               |
| Material of impeller   | Sheet steel, hot-galvanised                      |
| Housing material   | Die-cast aluminium                               |
| Material of guard grille   | Hot-galvanised and spot-welded power line        |
| Direction of rotation  | Clockwise, seen on rotor                         |
| Type of protection   | IP 44; Depending on installation and position    |
| Insulation class   | "B"  |
| Humidity class   | F0   |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C  |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C  |
| Mounting position  | Any  |
| Condensate discharge holes   | None   |
| Operation mode   | S1   |
| Motor bearing  | Ball bearing                                     |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | < 0.75 mA  |
| Electrical leads   | Via terminal box                                 |
| Protection class   | I (if protective earth is connected by customer) |
| Product conforming to standard                                     | EN 60335-1                                       |



# AC centrifugal fan


forward curved, single inlet  
with housing (flange)

## Product drawing

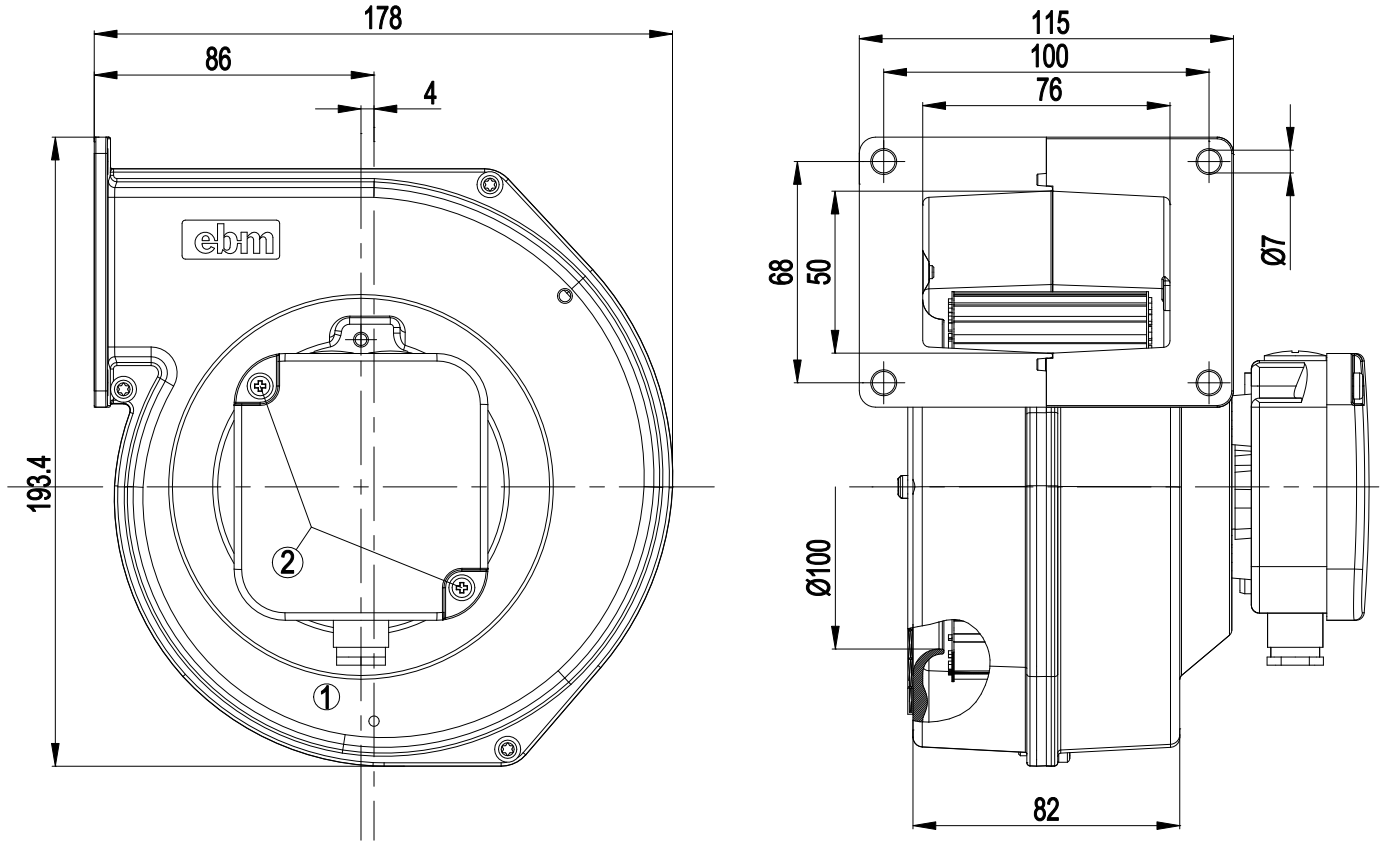

- |   |  |
|---|--|
| 1 | Cable diameter max. 7.5 mm; tightening torque 2 Nm |
| 2 | Tightening torque 0.8 Nm                           |

## Connection screen

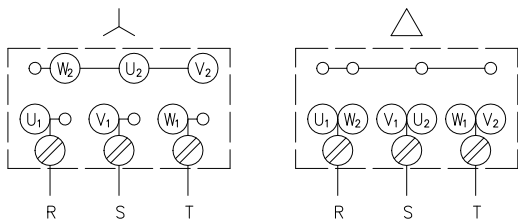


# AC centrifugal fan

forward curved, single inlet

with housing (flange)

## Charts: Air flow 50 Hz

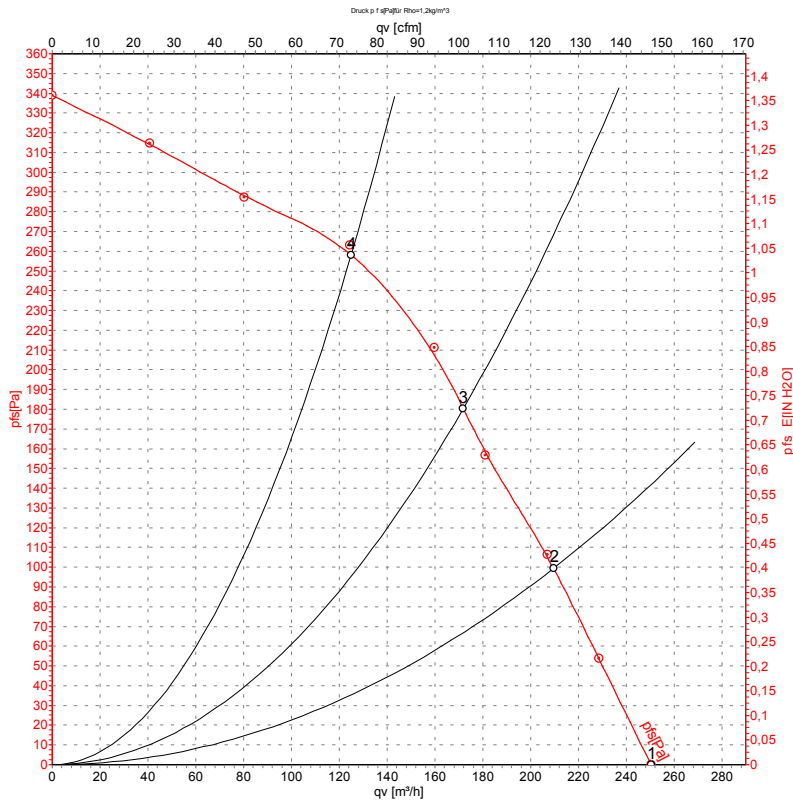

Measurement: LU-61711

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv                | P <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              |
| 1 | 400 | 50 | 2300              | 65             | 0.12 | 250               | 0               |
| 2 | 400 | 50 | 2440              | 55             | 0.11 | 210               | 100             |
| 3 | 400 | 50 | 2545              | 49             | 0.11 | 170               | 180             |
| 4 | 400 | 50 | 2670              | 42             | 0.11 | 125               | 260             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase




# AC centrifugal fan

forward curved, single inlet

with housing (flange)

## Charts: Air flow 60 Hz

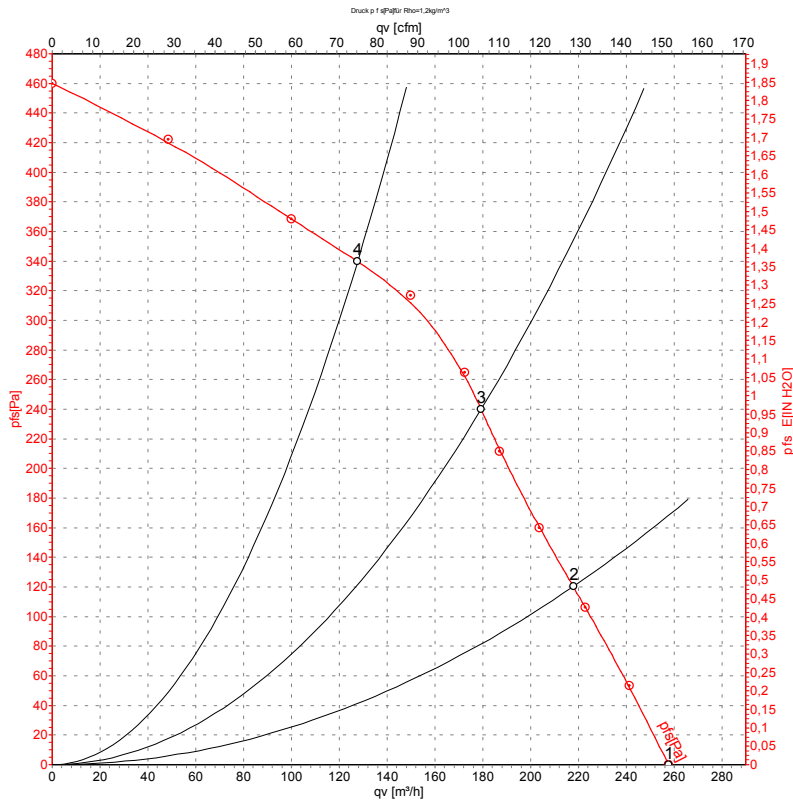

Measurement: LU-61712

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | qv                | P <sub>fs</sub> |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              |
| 1 | 400 | 60 | 2350              | 75             | 0.12 | 260               | 0               |
| 2 | 400 | 60 | 2595              | 65             | 0.11 | 220               | 120             |
| 3 | 400 | 60 | 2795              | 56             | 0.10 | 180               | 240             |
| 4 | 400 | 60 | 3015              | 44             | 0.09 | 130               | 340             |

U = Supply voltage · f = Frequency · n = Speed · P<sub>e</sub> = Power input · I = Current draw · qv = Air flow · P<sub>fs</sub> = Pressure increase

