

AC centrifugal fan

forward-curved, single-intake

with housing (flange)

G2D120-AA22-26 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G2D120-AA22-26		
Motor	M2D068-BF		
Phase		3~	3~
Nominal voltage	VAC	400	480
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		fa	fa
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2350	2680
Power consumption	W	67	100
Current draw	A	0.13	0.16
Min. back pressure	Pa	0	0
Min. back pressure	inH ₂ O	0	0
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	60	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	2.2 kg
Fan size	120 mm
Rotor surface	Painted black
Terminal box material	PC/ABS plastic
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Guard grille material	Hot-dip galvanized and spot-welded net
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1, motor does not have factory-installed overheating protection; CE
Approval	CSA C22.2 No. 100; UL 1004-1



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

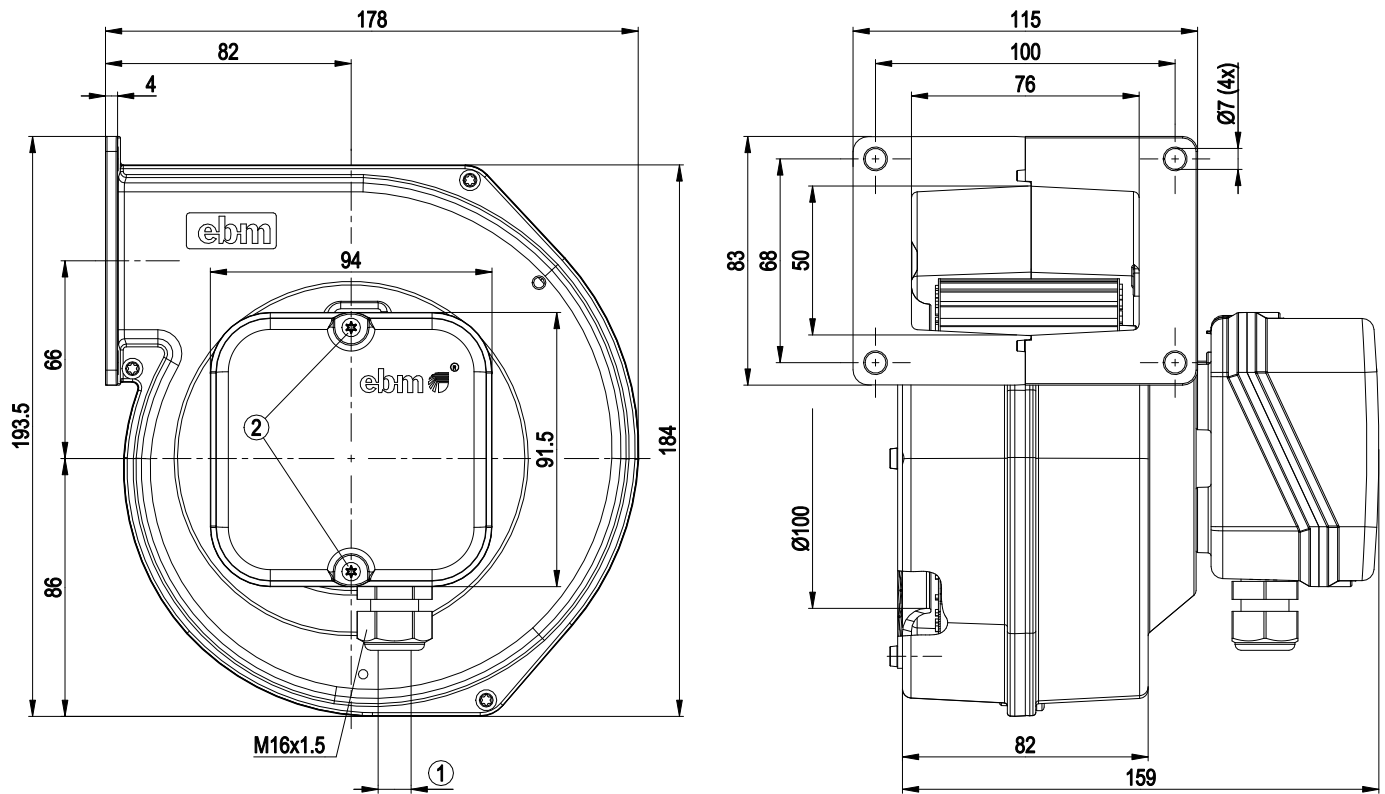


- | | |
|---|---|
| 1 | Cable diameter max. 10 mm, tightening torque 3 ± 0.4 Nm |
| 2 | Tightening torque 0.5 ± 0.1 Nm |



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

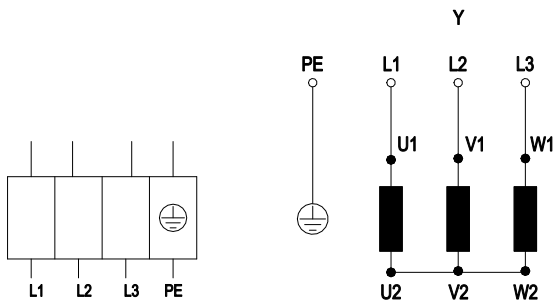


Y	Star connection	L1	black	L2	blue
L3	brown	PE	green/yellow		



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

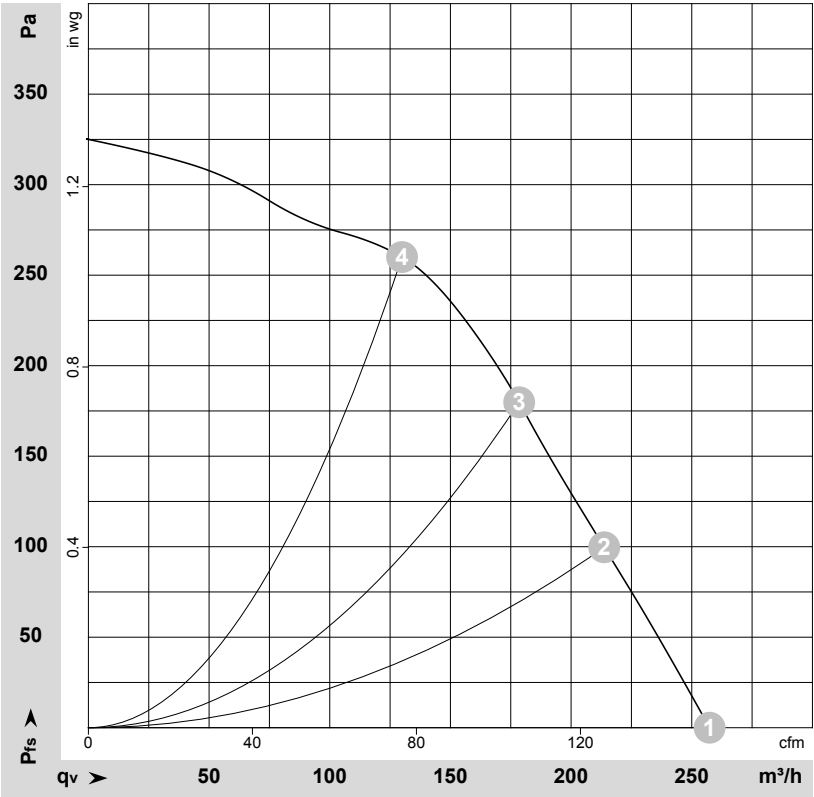

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-69765-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	400	50	2350	67	0.13	255	0	150	0.00
2	400	50	2475	59	0.12	215	100	125	0.40
3	400	50	2575	53	0.12	180	180	105	0.72
4	400	50	2690	46	0.12	130	260	75	1.04


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

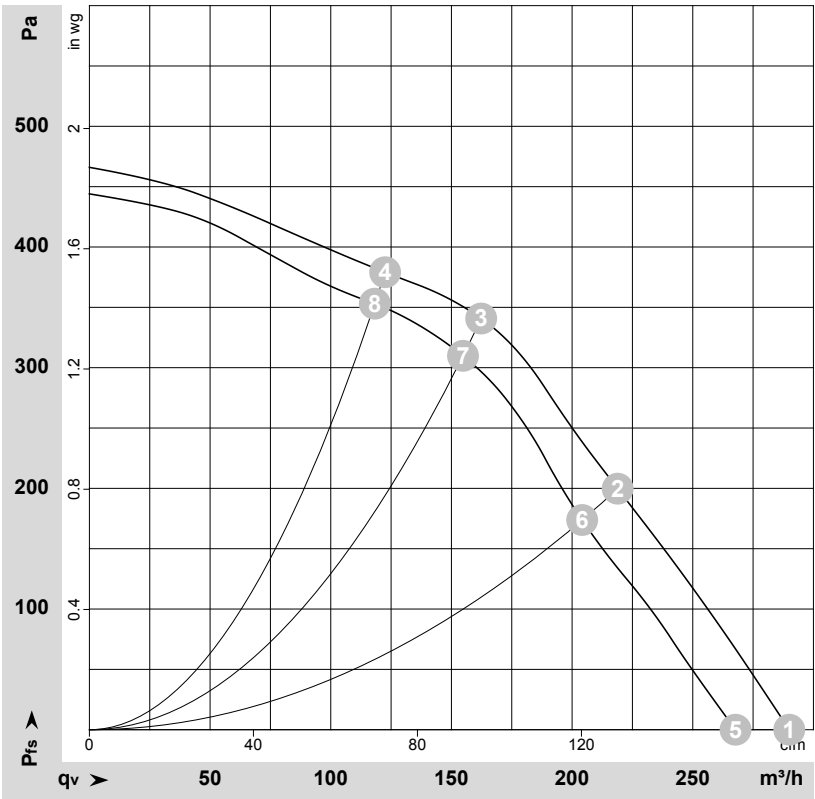

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-108549-1
Measurement: LU-69767-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	CFM	inH ₂ O
1	480	60	2680	100	0.16	290	0	170	0.00
2	480	60	2930	82	0.14	220	200	130	0.80
3	480	60	3085	71	0.14	160	340	95	1.36
4	480	60	3205	63	0.14	125	380	70	1.53
5	400	60	2400	80	0.13	270	0	160	0.00
6	400	60	2745	63	0.11	205	174	120	0.70
7	400	60	2955	52	0.10	155	311	90	1.25
8	400	60	3105	44	0.09	120	353	70	1.42

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

