

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

G2D146-BF02-23 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G2D146-BF02-23		
Motor	M2D068-EC		
Phase		3~	3~
Nominal voltage	VAC	400	400
Wiring		Y	Y
Frequency	Hz	50	60
Method of obtaining data		fa	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2450	2700
Power consumption	W	260	300
Current draw	A	0.42	0.47
Min. back pressure	Pa	0	100
Min. back pressure	inH ₂ O	0	0.4
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	55	40
Starting current	A	1.0	1.0

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	4.0 kg
Fan size	146 mm
Rotor surface	Unpainted
Terminal box material	ABS plastic
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1, motor does not have factory-installed overheating protection; CE



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

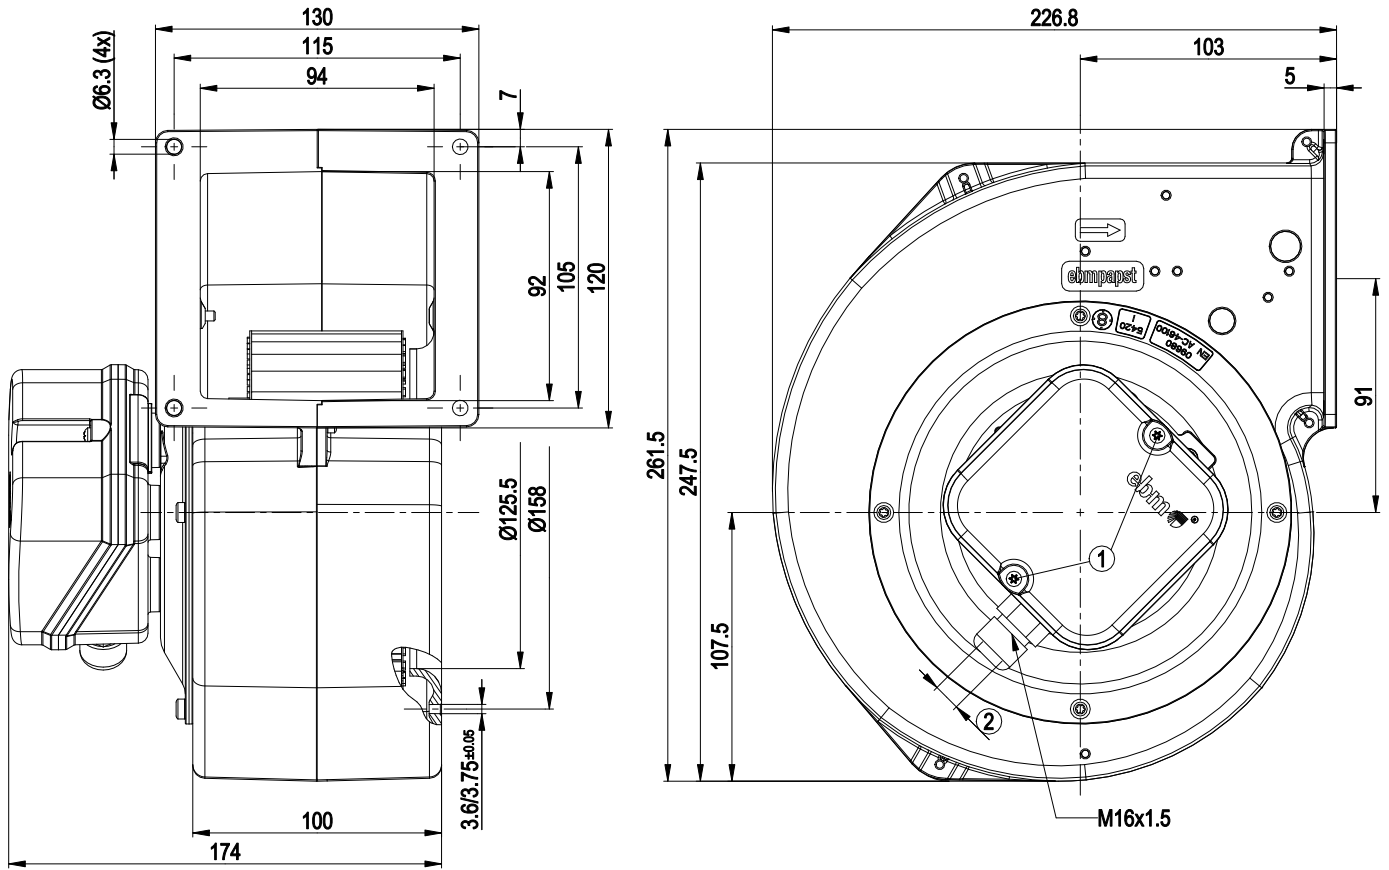


- | | |
|---|--|
| 1 | Tightening torque 0.5 ± 0.1 Nm |
| 2 | Cable diameter max. 7.5 mm, tightening torque 1.3 ± 0.2 Nm |

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

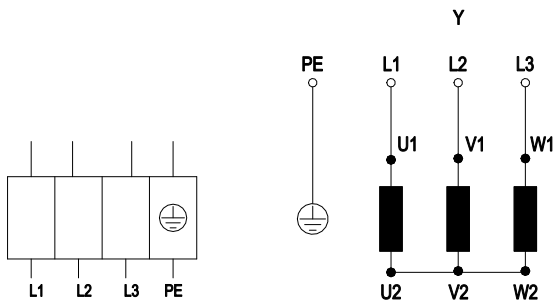

Y	Star connection	L1	black	L2	blue
L3	brown	PE	green/yellow		




AC centrifugal fan

forward-curved, single-intake

with housing (flange)

Curves: Air performance 50 Hz

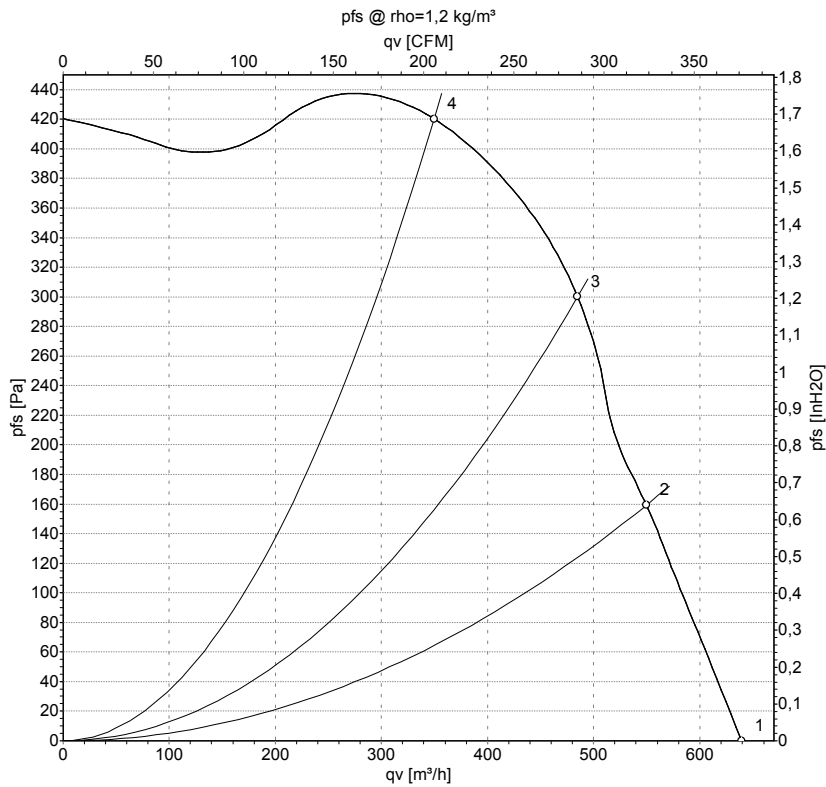

Measurement: LU-25552-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	400	50	2450	260	0.42	640	0	375	0.00
2	400	50	2620	196	0.32	550	160	325	0.64
3	400	50	2670	175	0.29	485	300	285	1.20
4	400	50	2785	125	0.24	350	420	205	1.69


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

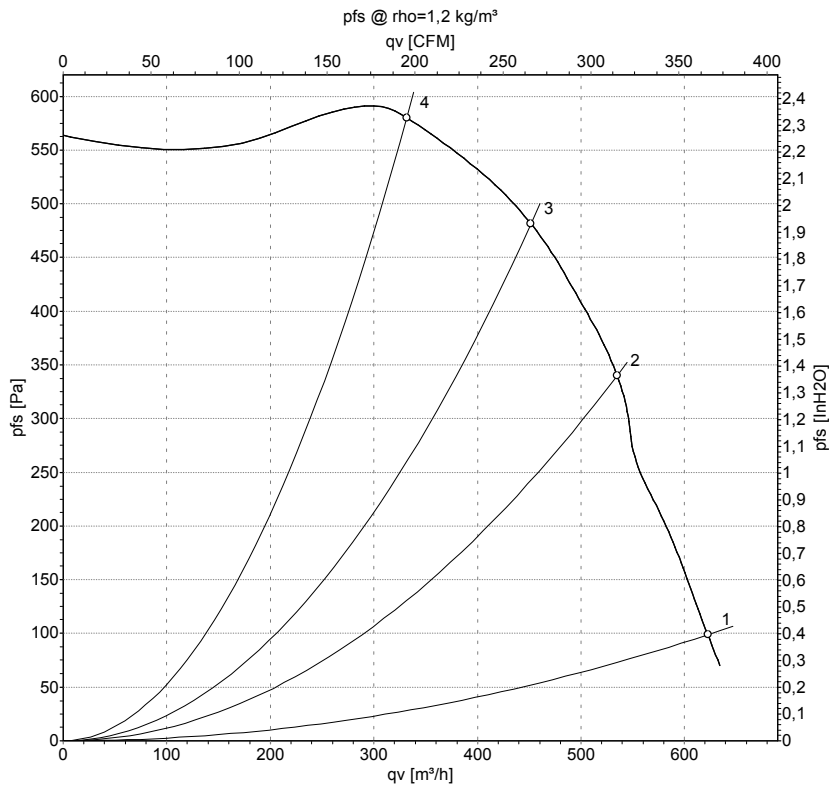

Measurement: LU-25559-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	400	60	2700	300	0.47	620	100	365	0.40
2	400	60	2900	265	0.41	535	340	315	1.36
3	400	60	3050	221	0.34	450	480	265	1.93
4	400	60	3225	165	0.27	330	580	195	2.33

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

