

AC centrifugal fan

forward-curved, single-intake

with housing (flange)

G2D180-AE02-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G2D180-AE02-15				
Motor	M2D068-GA				
Phase		3~	3~	3~	3~
Nominal voltage	VAC	230	230	400	400
Wiring		Δ	Δ	Y	Y
Frequency	Hz	50	60	50	60
Method of obtaining data		ml	ml	ml	ml
Valid for approval/standard		CE	CE	CE	CE
Speed (rpm)	min ⁻¹	2370	2850	2370	2850
Power consumption	W	420	385	420	385
Current draw	A	1.12	1.04	0.65	0.60
Min. back pressure	Pa	300	800	300	800
Min. back pressure	inH ₂ O	1.2	3.21	1.2	3.21
Min. ambient temperature	°C	-25	-25	-25	-25
Max. ambient temperature	°C	30	30	30	30
Starting current	A	1.66	1.65	1.66	1.65

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	37.4	33.6	09 Power consumption P_e	kW	0.23
02 Measurement category		A		09 Air flow q_v	m ³ /h	430
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	727
04 Efficiency grade N		47.8	44	10 Speed (rpm) n	min ⁻¹	2695
05 Variable speed drive		No		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-56385



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	5.4 kg
Fan size	180 mm
Rotor surface	Unpainted
Terminal box material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Guard grille material	Steel, galvanized and coated with black plastic (RAL 9005)
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F1-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box
Protection class	I (if protective earth is connected by customer to the housing's connection point)
Conformity with standards	EN 60335-1, motor does not have factory-installed overheating protection; CE



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

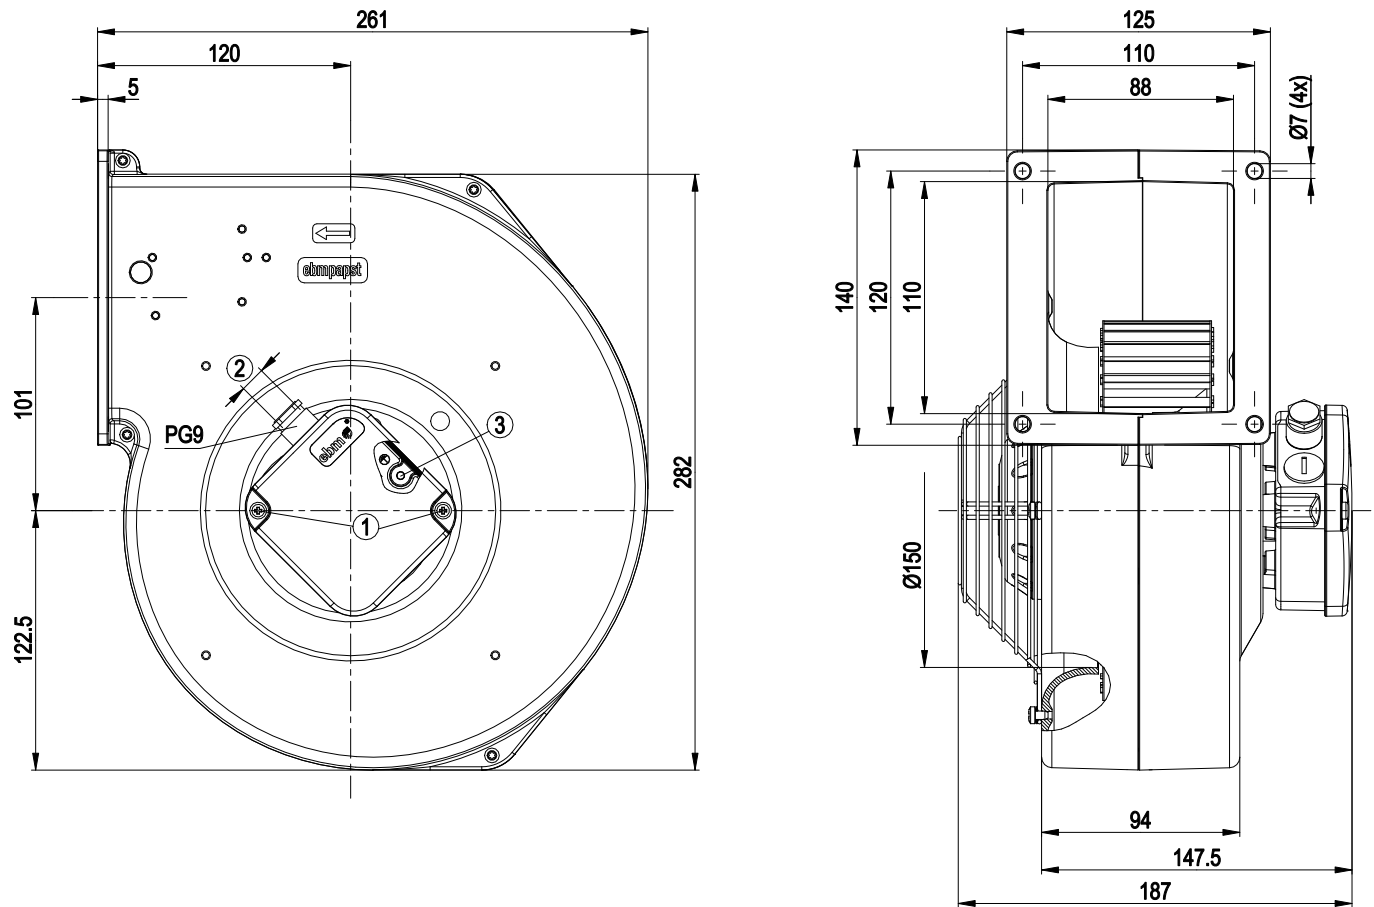


1	Tightening torque 1.3 ± 0.2 Nm
2	Cable diameter min. 6 mm, max. 8 mm, tightening torque 2 ± 0.3 Nm
3	For self-tapping M4 screws, max. clearance for screw 5 mm

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

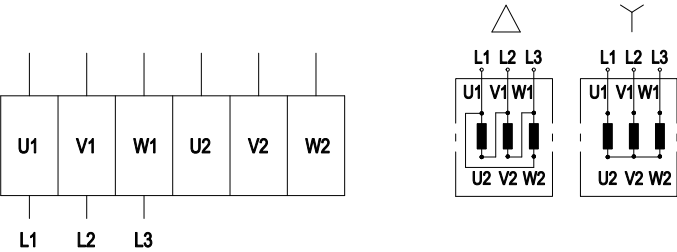


	Three-phase motor	Y	Star connection	Δ	Delta connection
L1	= U1 = blue	L2	= V1 = black	L3	= W1 = brown
U2	green	V2	white	W2	yellow



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

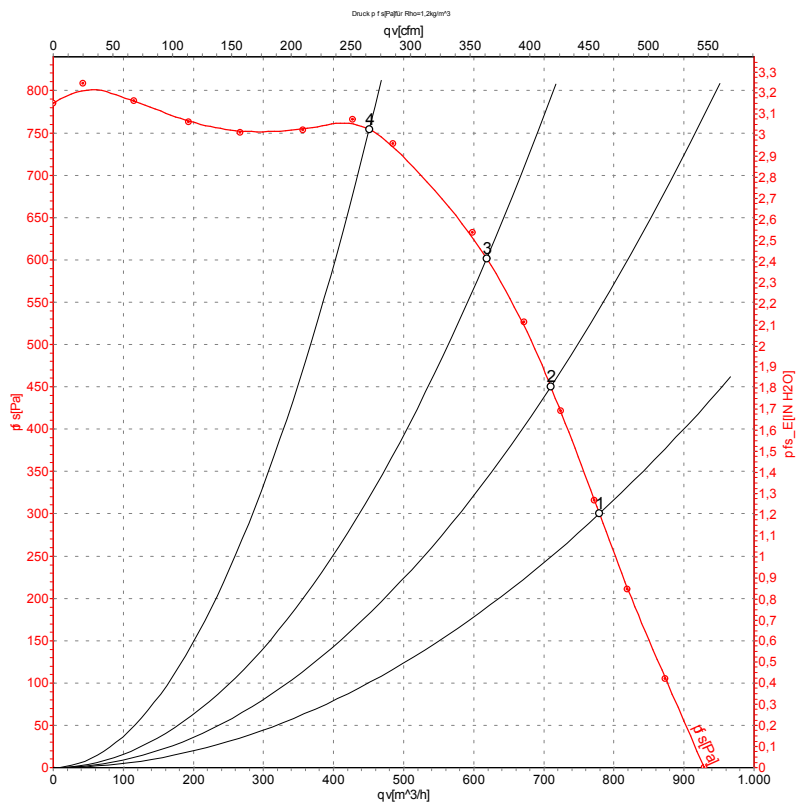

Measurement: LU-56385-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _V	p _{Is}	q _V	p _{Is}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	400	50	2370	420	0.65	770	300	455	1.20
2	400	50	2445	378	0.59	710	450	420	1.81
3	400	50	2540	323	0.52	620	600	365	2.41
4	400	50	2680	240	0.40	450	750	265	3.01


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_V = Air flow · p_{Is} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

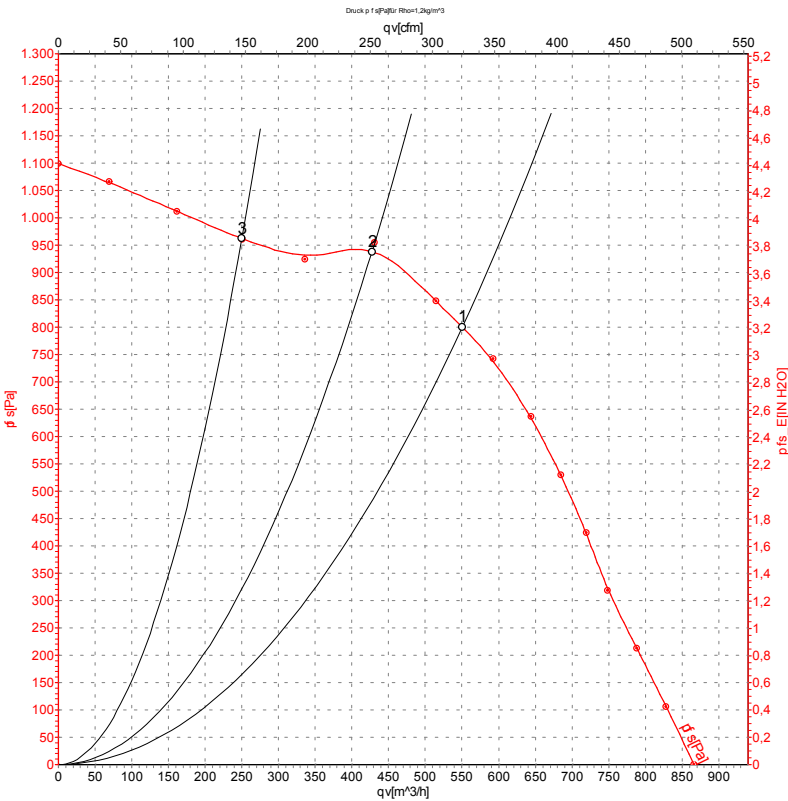

Measurement: LU-56386-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	400	60	2850	385	0.60	550	800	325	3.21
2	400	60	2995	328	0.51	425	950	250	3.81
3	400	60	3130	264	0.42	250	960	145	3.85

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase

