

AC centrifugal fan

forward-curved, single-intake

with housing (flange)

G2D180-CF02-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G2D180-CF02-05	
Motor	M2D074-GA	
Phase		3~
Nominal voltage	VAC	400
Wiring		Y
Frequency	Hz	50
Method of obtaining data		ml
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	2450
Power consumption	W	445
Current draw	A	0.77
Min. back pressure	Pa	300
Min. back pressure	inH ₂ O	1.2
Max. ambient temperature	°C	60
Starting current	A	2.2

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	37.6	33.8
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		47.8	44
05 Variable speed drive		No	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.24
09 Air flow q_v	m ³ /h	440
09 Pressure increase p_{fs}	Pa	751
10 Speed (rpm) n	min ⁻¹	2755
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-29582



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	6.1 kg
Fan size	180 mm
Rotor surface	Painted black
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F2-2
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) with basic insulation
With cable	Axial
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

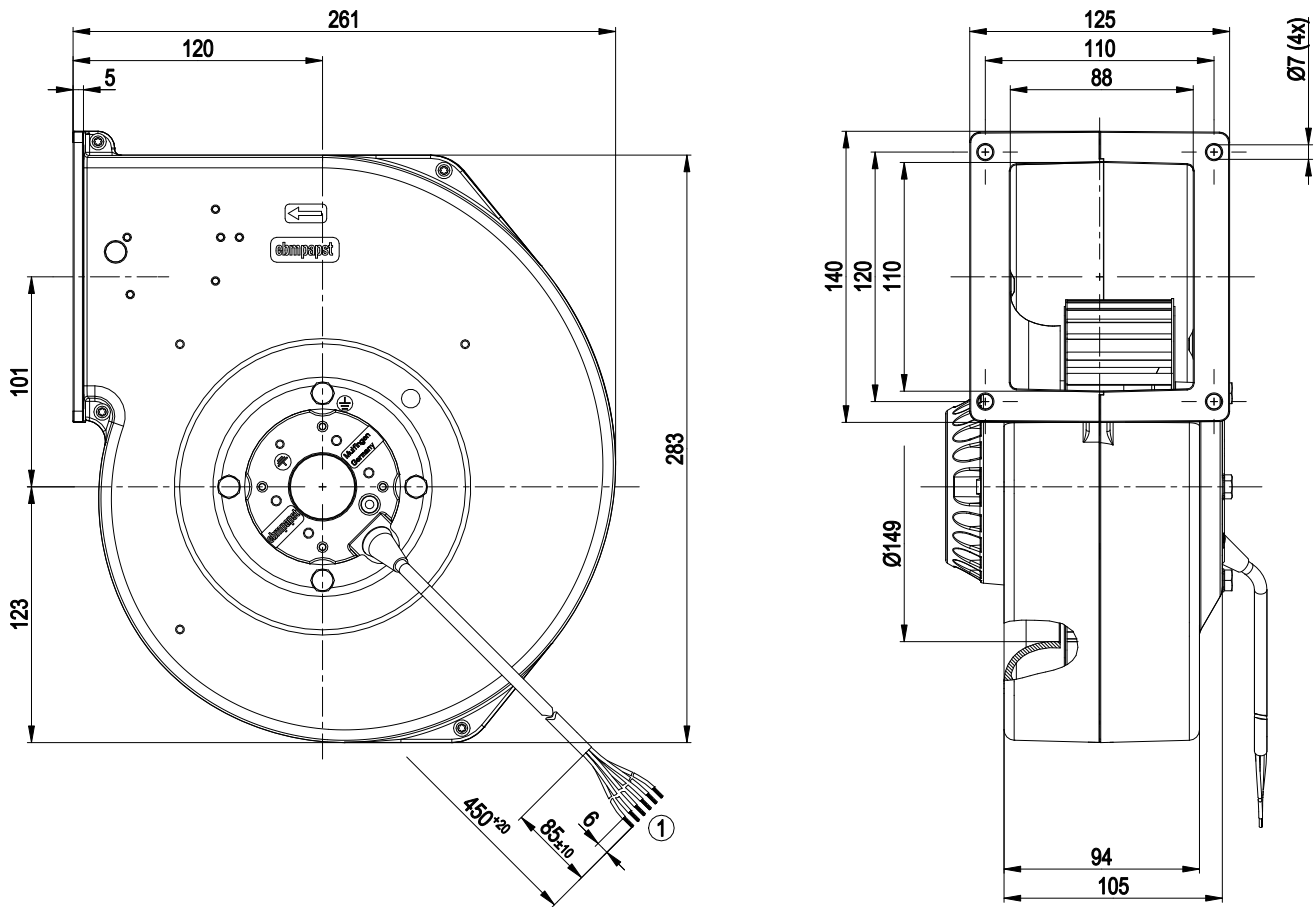


1 Cable Dipotherm 6G 0.5 mm², 6x crimped splices

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram



Note: Change of rotation direction by reversing two phases


Y	Star connection	L1	black	L2	blue
L3	brown	TOP	white	PE	green/yellow



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz Y

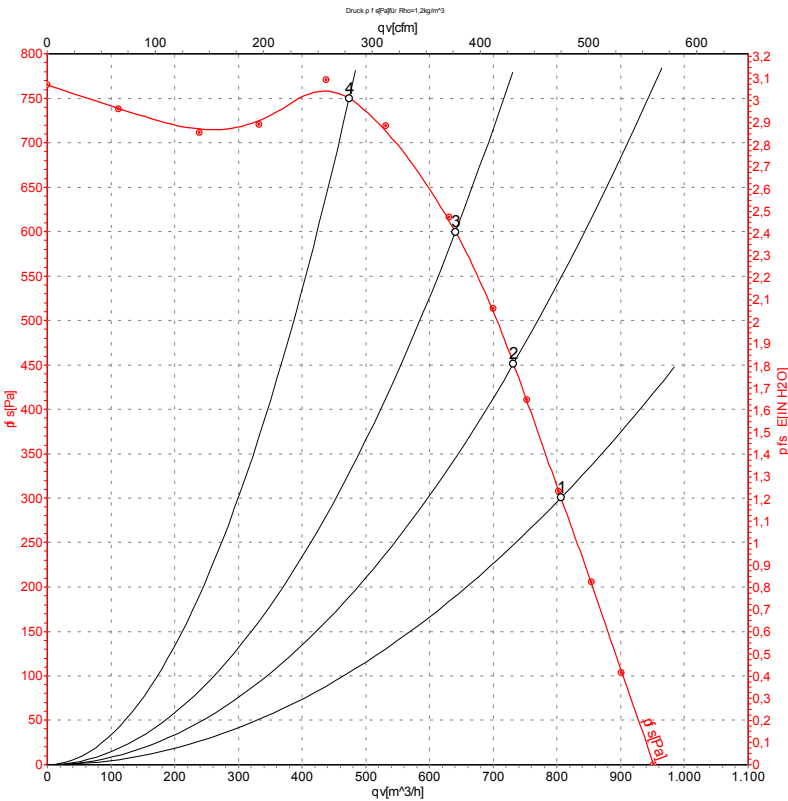

Measurement: LU-29582-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH ₂ O
1	Y	400	50	2450	445	0.77	805	300	475	1.20
2	Y	400	50	2540	398	0.68	730	450	430	1.81
3	Y	400	50	2620	344	0.60	640	600	375	2.41
4	Y	400	50	2735	259	0.49	475	750	280	3.01

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

