

AC centrifugal fan

forward-curved, single-intake
with housing (without flange)



G2E140-NF33-35 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G2E140-NF33-35			
Motor	M2E068-CF			
Phase		1~	1~	1~
Nominal voltage	VAC	230	230	230
Frequency	Hz	50	60	60
Method of obtaining data		fa	fa	fa
Valid for approval/standard		CE	CE	UL 2111
Speed (rpm)	min ⁻¹	2200	2150	2150
Power consumption	W	150	185	192
Current draw	A	0.66	0.82	0.88
Capacitor	μF	4	4	4
Capacitor voltage	VDB	450	450	450
Capacitor standard		S0 (CE)	S0 (CE)	UL
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	45	30	30
Starting current	A	0.84	0.88	

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Technical description


Weight	2.2 kg
Fan size	140 mm
Rotor surface	Unpainted
Impeller material	PP-GF40 plastic
Housing material	PP plastic, black
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0+
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE
Approval	CSA C22.2 No. 77; CCC; UL 2111



AC centrifugal fan


forward-curved, single-intake
with housing (without flange)

Product drawing

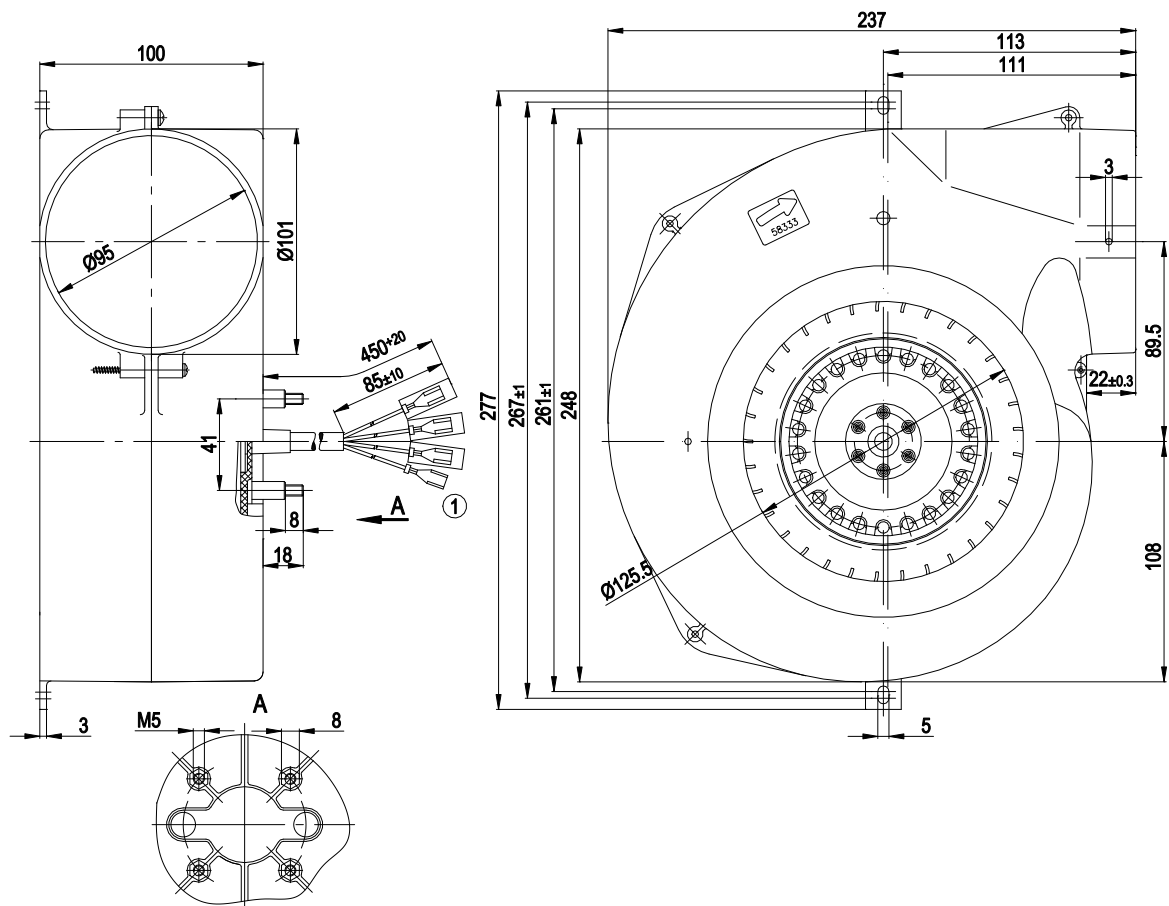

1 Cable PVC 4G AWG20, 4x flat push-on receptacle 6.3 - 0.8 with 3x AMP connector housing 1-735075-0 crimped

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Curves: Air performance 50 Hz

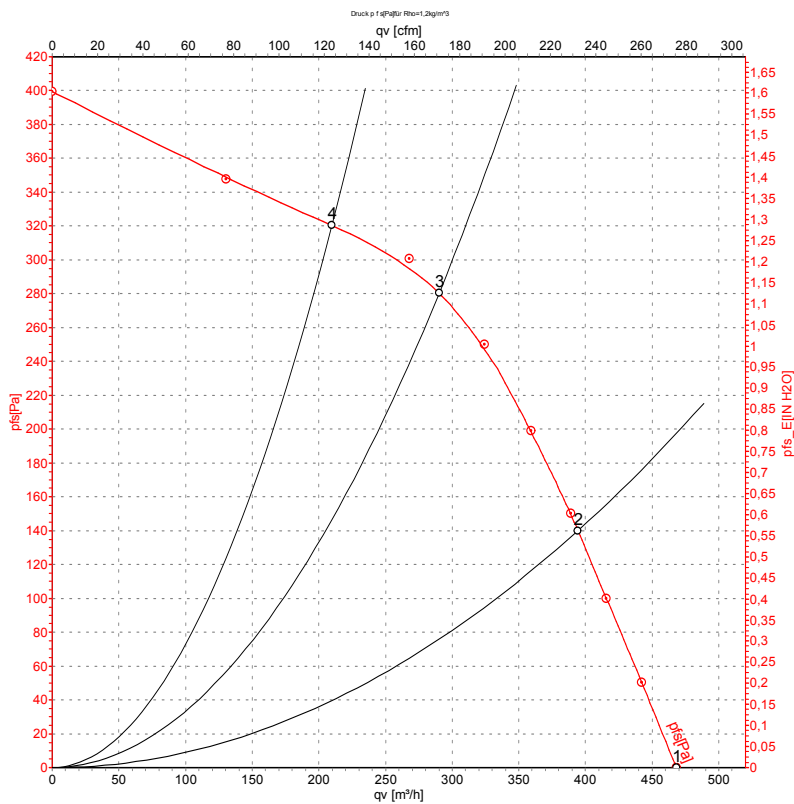

Measurement: LU-20140-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{is}	q _v	p _{is}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH ₂ O
1	230	50	2200	150	0.66	470	0	275	0.00
2	230	50	2400	140	0.61	395	140	230	0.56
3	230	50	2550	127	0.55	290	280	170	1.12
4	230	50	2645	118	0.51	210	320	125	1.28


U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{is} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (without flange)

Curves: Air performance 60 Hz

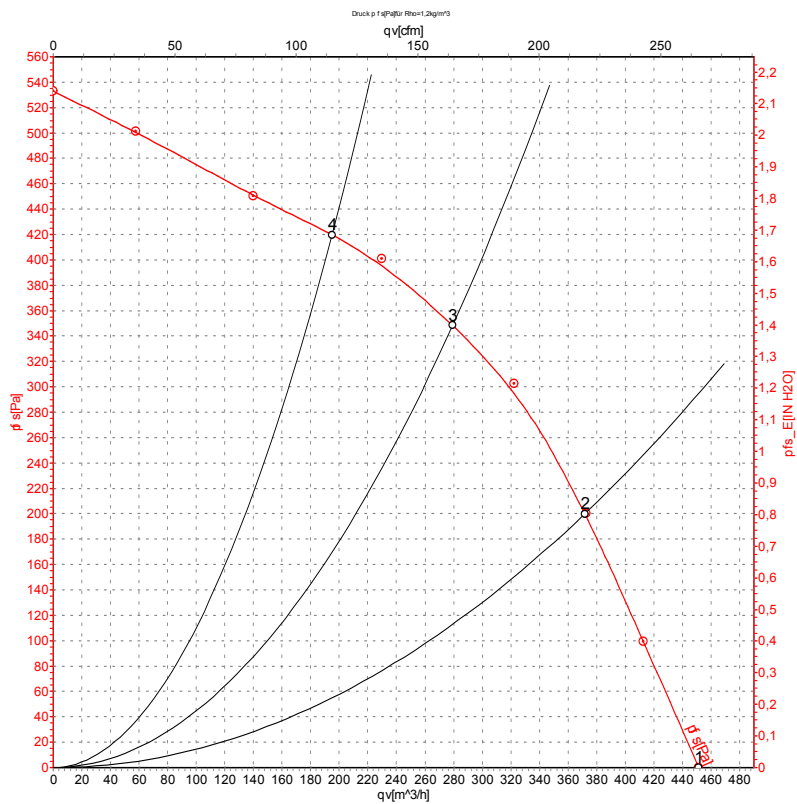

Measurement: LU-20142-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	60	2150	185	0.82	450	0	265	0.00
2	230	60	2505	177	0.78	370	200	220	0.80
3	230	60	2785	166	0.74	280	350	165	1.41
4	230	60	2990	156	0.70	195	420	115	1.69

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

