

AC centrifugal fan

forward-curved, single-intake

with housing (flange)

G2E146-DW07-15 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	G2E146-DW07-15		
Motor	M2E068-CA		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		fa	ml
Valid for approval/standard		CE	CE
Speed	min ⁻¹	1550	1750
Power consumption	W	140	155
Current draw	A	0.62	0.68
Capacitor	μF	3	3
Capacitor voltage	VDB	450	450
Capacitor standard		P0 (CE)	P0 (CE)
Min. back pressure	Pa	0	100
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	65	50
Starting current	A	0.69	0.71

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	3 kg
Fan size	146 mm
Rotor surface	Unpainted
Terminal box material	PC/ABS plastic
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Via terminal box, capacitor integrated and connected
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	P0/S0
Conformity with standards	EN 60335-1; CE



AC centrifugal fan


forward-curved, single-intake
with housing (flange)

Product drawing

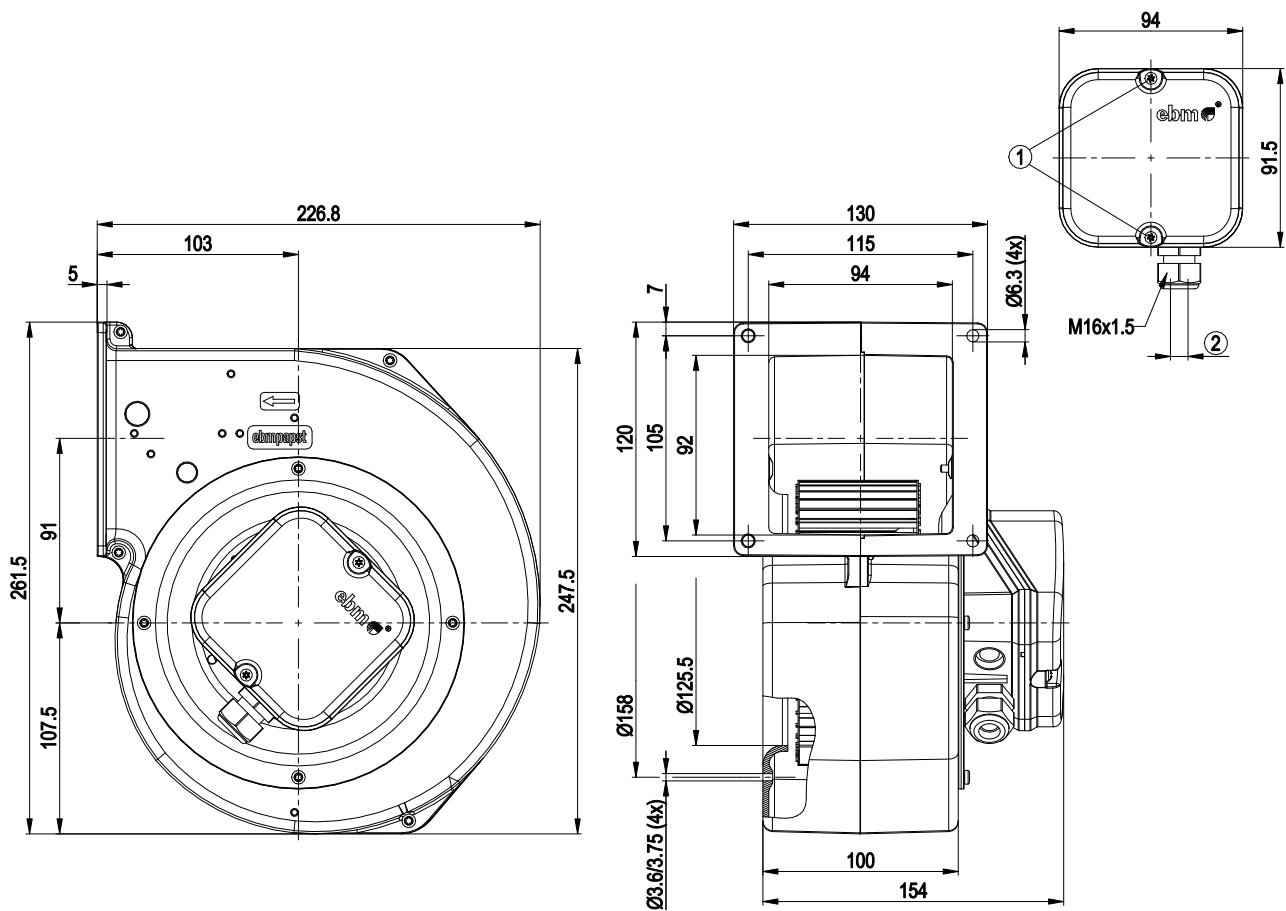

- | | |
|---|--|
| 1 | Tightening torque 0.5 ± 0.1 Nm |
| 2 | Cable diameter min. 5 mm, max. 10 mm, tightening torque 2 ± 0.3 Nm |

Connection diagram




PE	green/yellow	L	black	N	blue
----	--------------	---	-------	---	------



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

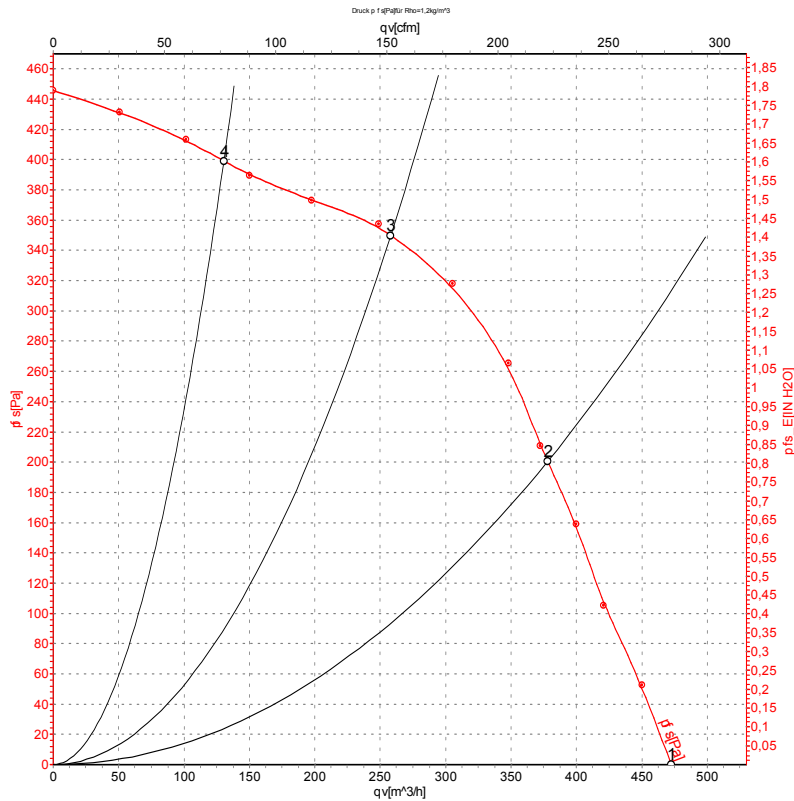

Measurement: LU-105087-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{ts}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	50	1550	140	0.62	475	0
2	230	50	2035	122	0.53	380	200
3	230	50	2395	104	0.45	260	350
4	230	50	2605	91	0.40	130	400


U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{ts} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

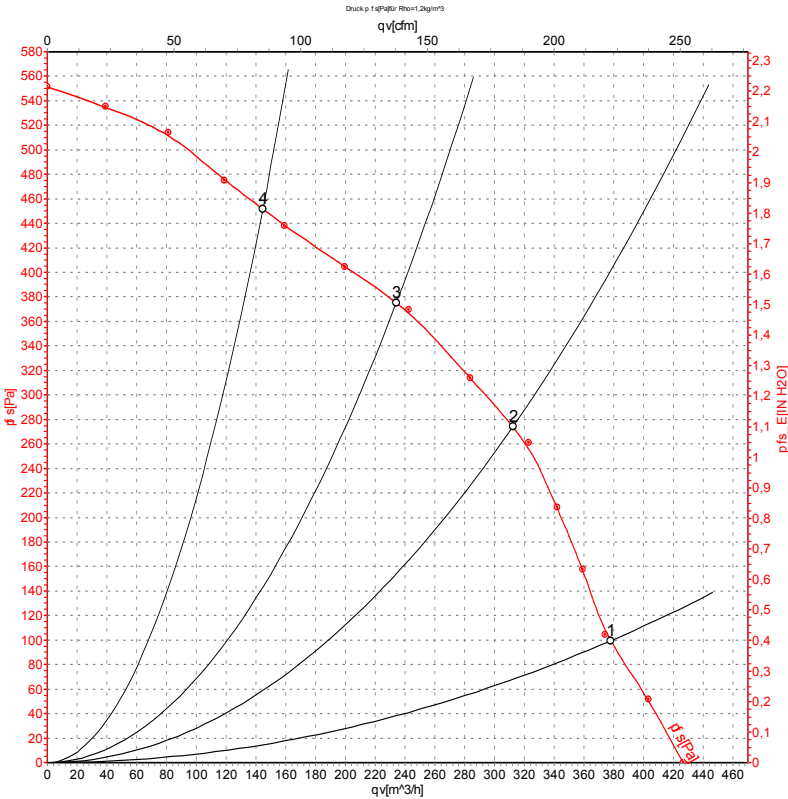

Measurement: LU-105090-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{is}
	V	Hz	min ⁻¹	W	A	m³/h	Pa
1	230	60	1750	155	0.68	380	100
2	230	60	2145	144	0.62	310	275
3	230	60	2500	137	0.59	235	375
4	230	60	2775	130	0.57	145	450

U = Power supply · f = Frequency · n = Speed · P_e = Power consumption · I = Current draw · qv = Air flow · p_{is} = Pressure increase

