

Nominal data

Type	G2E160-AY50-99		
Motor	M2E068-EC		
Phase		1~	1~
Nominal voltage	VAC	230	230
Frequency	Hz	50	60
Method of obtaining data		ml	ml
Valid for approval/standard		CE	CE
Speed (rpm)	min ⁻¹	2280	2700
Power consumption	W	270	275
Current draw	A	1.18	1.2
Capacitor	μF	6	6
Capacitor voltage	VDB	400	400
Capacitor standard		S2 (CE)	S2 (CE)
Min. back pressure	Pa	100	405
Min. back pressure	in. wg	0.4	1.63
Min. ambient temperature	°C	-25	-25
Max. ambient temperature	°C	60	50
Starting current	A	4.0	1.6

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	32.6	32.6
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		44	44
05 Variable speed drive		No	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.16
09 Air flow q_v	m ³ /h	355
09 Pressure increase p_{fs}	Pa	518
10 Speed (rpm) n	min ⁻¹	2725
11 Specific ratio*		1.01

* Specific ratio = $1 + p_g / 100\,000\text{ Pa}$

LU-140170



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	4.0 kg
Size	160 mm
Motor size	68
Rotor surface	Unpainted
Terminal box material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Electrical hookup	Terminal box
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Motor capacitor according to EN 60252-1 in safety protection class	S2
Conformity with standards	EN 60335-1; CE



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

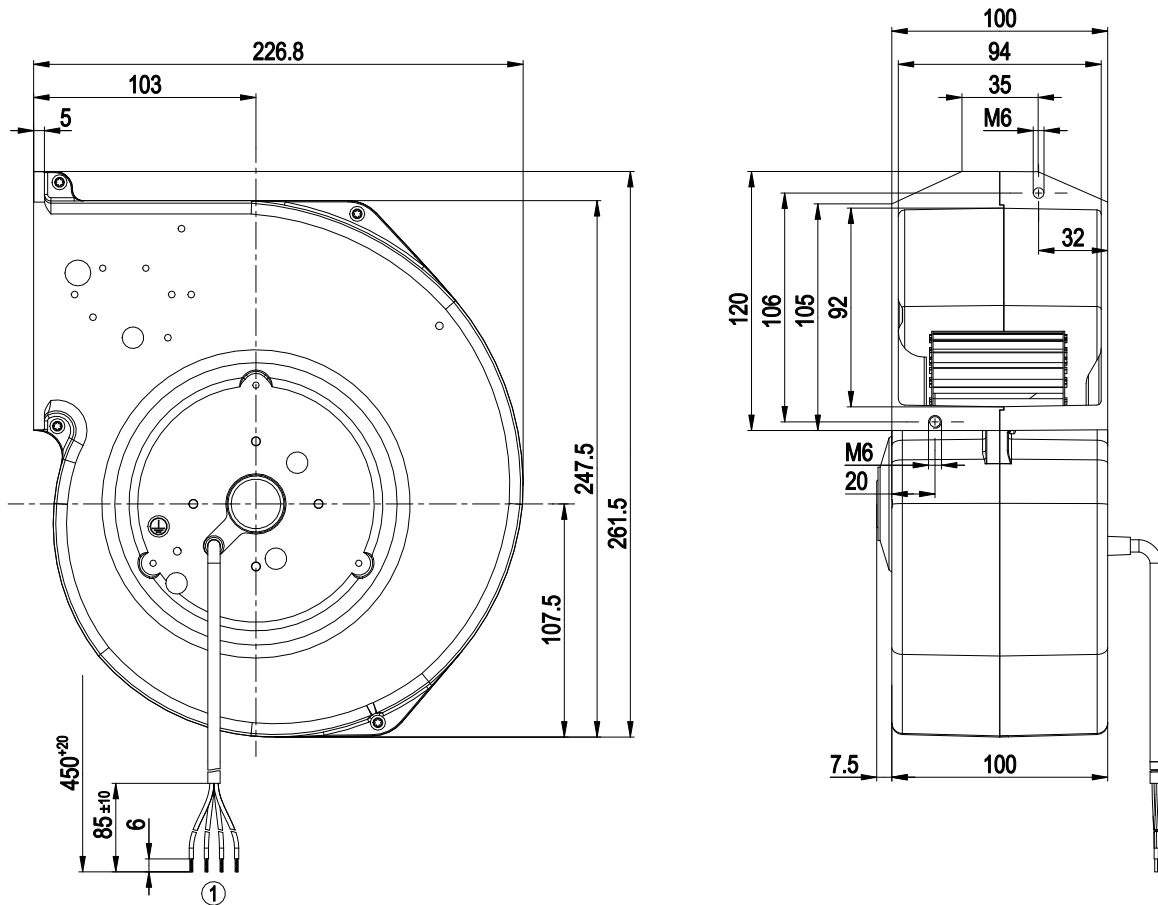


1	Cable silicone 4G 0.5 mm ²
	4x splice
	Accessory part: Terminal box, capacitor machined and clamp included separately

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Accessory part

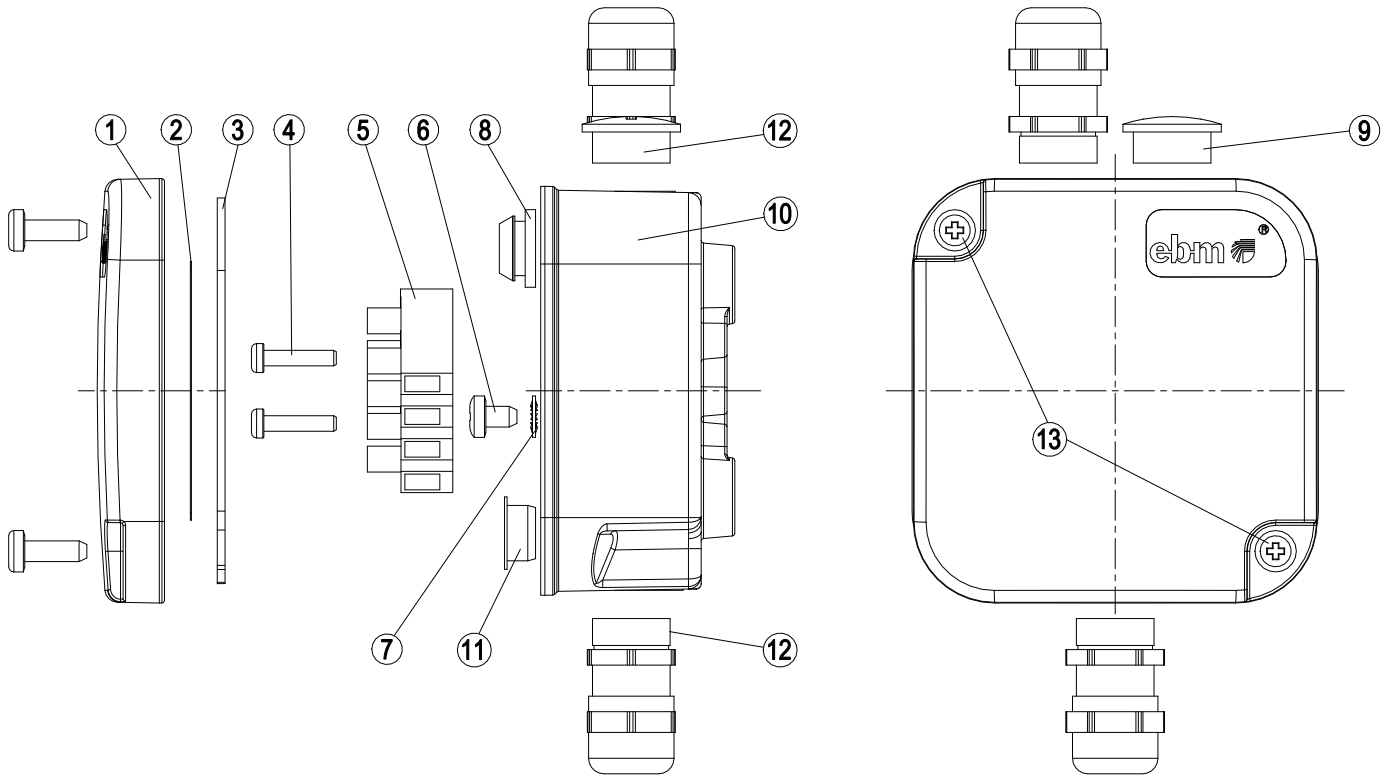


Accessory parts, included separately:

1	Terminal box cover
2	Labels/connection diagram
3	Seal
4	Oval-head screw (2x), tightening torque 1 ± 0.1 Nm
5	Terminal strip
6	Oval-head screw, tightening torque 1 ± 0.1 Nm
7	Toothed lock washer
8	Grommet
9	Screw plug, tightening torque 0.6 ± 0.1 Nm
10	Base of terminal box
11	Stopper
12	Cable glands (2x), cable diameter min. 6 mm, max. 8 mm, tightening torque 2 ± 0.3 Nm
13	Oval-head screw (2x), tightening torque 0.6 ± 0.1 Nm


AC centrifugal fan

forward-curved, single-intake
with housing (flange)

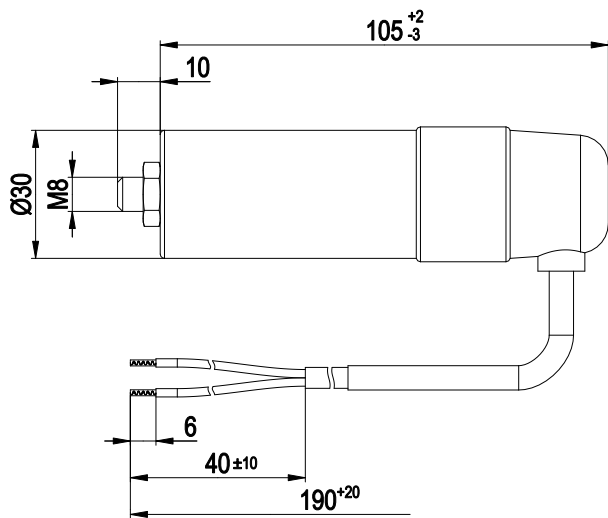

Capacitor 19744-4-7320 included separately

Connection diagram




U1	blue	Z	brown	U2	black
PE	green/yellow				



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

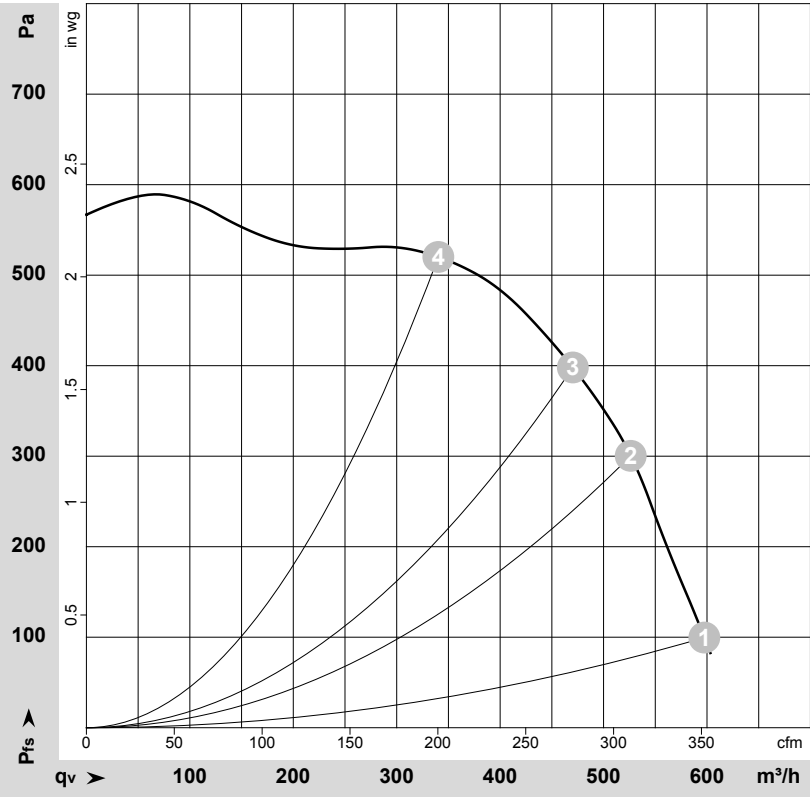

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-140170-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	50	2280	270	1.18	595	100	350	0.40
2	230	50	2485	226	0.98	525	300	310	1.20
3	230	50	2580	202	0.88	470	400	275	1.61
4	230	50	2730	159	0.69	340	520	200	2.09


U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 60 Hz

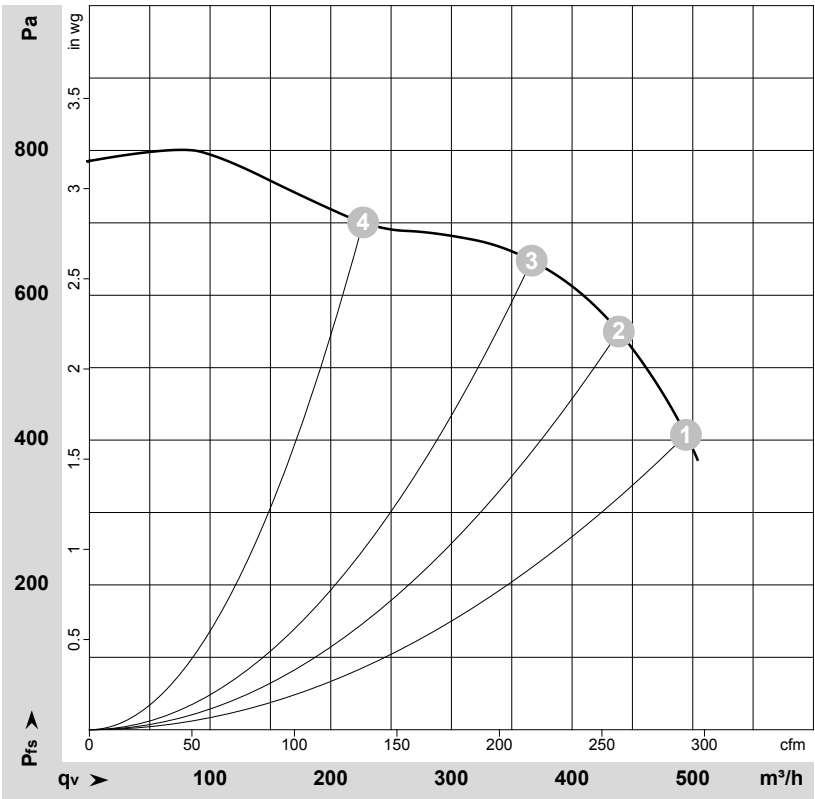

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-168444-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	q _V	p _{fs}	q _V	p _{fs}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	230	60	2700	275	1.20	495	405	290	1.63
2	230	60	2910	249	1.10	440	550	260	2.21
3	230	60	3080	220	0.98	365	650	215	2.61
4	230	60	3270	181	0.83	225	700	135	2.81

U = Voltage · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · q_V = Air flow · p_{fs} = Pressure increase

