

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
with housing (flange)

G3G133-RF15-03 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | G3G133-RF15-03    |            |
| Motor                    | M3G055-BD         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 5750       |
| Power consumption        | W                 | 85         |
| Current draw             | A                 | 0.75       |
| Min. back pressure       | Pa                | 0          |
| Min. back pressure       | in. wg            | 0          |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

# EC centrifugal fan - RadiCal

backward-curved, single-intake

with housing (flange)


## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 1.1 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Size                                                                       | 133 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Motor size                                                                 | 55                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Housing material                                                           | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Moisture (F) / Environmental (H) protection class                          | H1+                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Installation position                                                      | Any                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Condensation drainage holes                                                | None, open rotor                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor bearing                                                              | Ball bearing; (sealed, without air gap)                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                        |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                               |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                         |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Motor protection                                                           | Electronic motor protection                                                                                                                                                                                                                                                                                                                                                                                                                               |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Protection class assignment                                                | <p>I; If a protective earth is connected.</p> <p>The built-in component has several local protection class assignments.</p> <p>The final protection class is determined by the intended installation.</p>                                                                                                                                                                                                                                                 |
| Conformity with standards                                                  | EN 60034-1; EN 60204-1; EN 60335-1; CE; UKCA                                                                                                                                                                                                                                                                                                                                                                                                              |
| Comment on CE                                                              | Ecodesign Directive 2009/125/EC + Fan Directive (EC) No. 327/2011 does not apply, as power consumption <125W.                                                                                                                                                                                                                                                                                                                                             |

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
with housing (flange)

## Product drawing

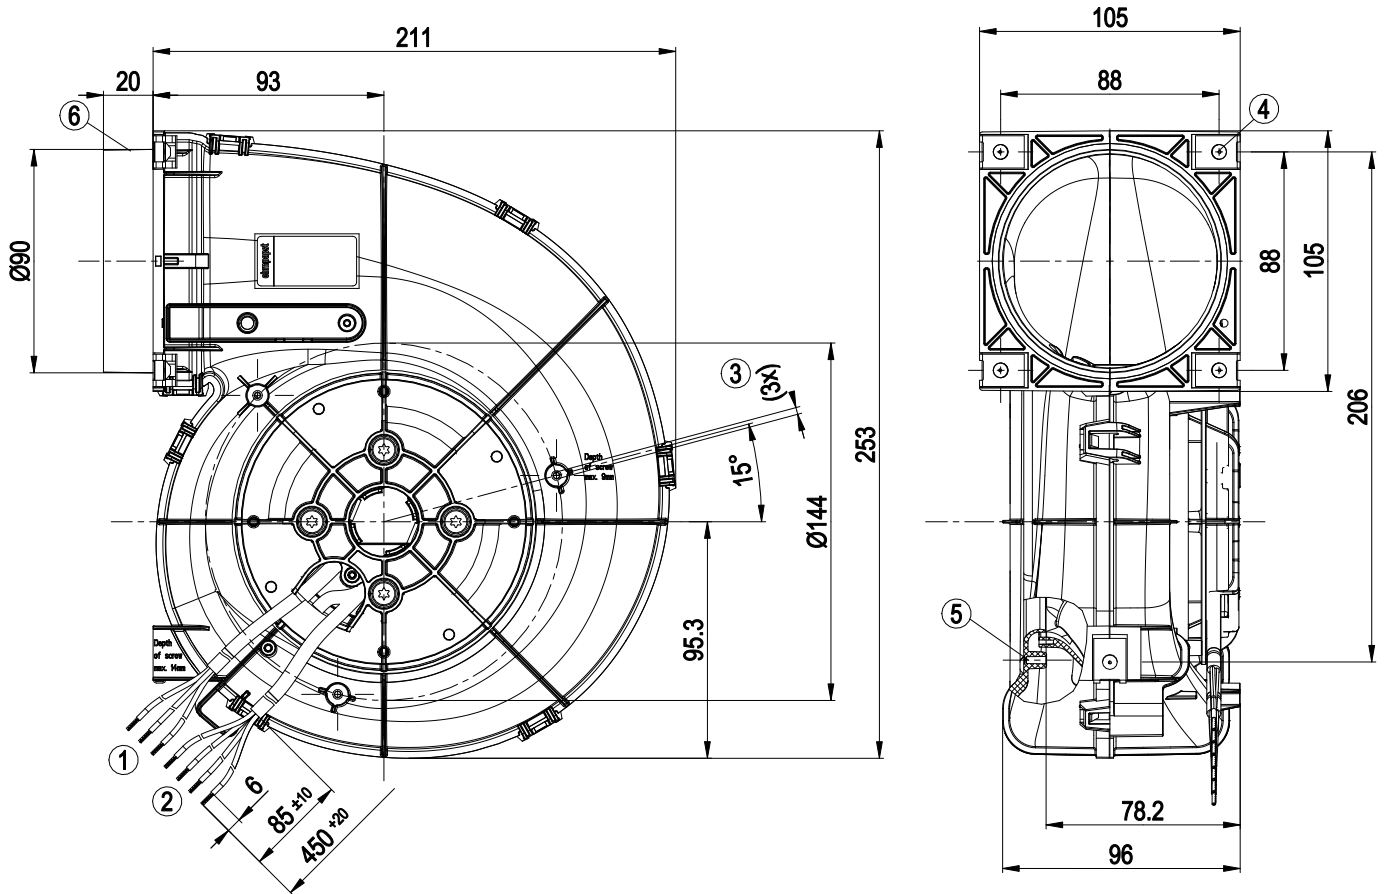


|   |                                                                                                               |
|---|---------------------------------------------------------------------------------------------------------------|
| 1 | Cable PVC AWG20<br>3x splice                                                                                  |
| 2 | Cable PVC AWG22<br>4x splice                                                                                  |
| 3 | Tapping hole prepared for dia. 4 mm self-tapping screw for fastening plastics, max. screw-in depth 9 mm       |
| 4 | 5x sheet metal nut for thread EN ISO 1478-ST4.8 (max. screw length 14 mm plus material thickness of mounting) |
| 5 | Screw-on domes are only permissible for Flowgrid!                                                             |
| 6 | Connecting sleeve not suitable for installation with pipe clamps                                              |

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
with housing (flange)

## Connection diagram

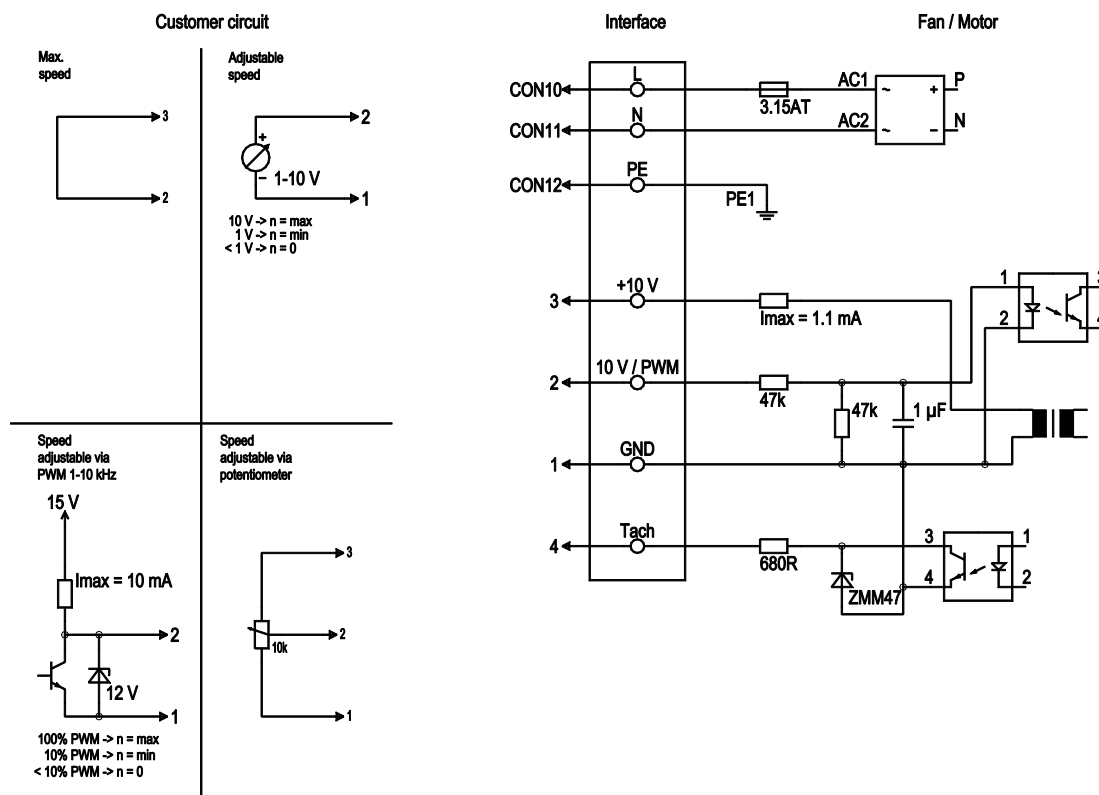


| No. | Conn. | Designation        | Color        | Function/assignment                                                        |
|-----|-------|--------------------|--------------|----------------------------------------------------------------------------|
|     | CON10 | L                  | black        | Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range            |
|     | CON11 | N                  | blue         | Neutral conductor                                                          |
|     | CON12 | PE                 | green/yellow | Protective earth                                                           |
|     | 1     | GND                | blue         | GND connection for control interface                                       |
|     | 2     | 0-10V PWM          | yellow       | Control input 0-10 V or PWM, electrically isolated                         |
|     | 3     | 10 V / max. 1,1 mA | red          | Voltage output 10 VDC 1.1 mA, electrically isolated, short-circuit-proof   |
|     | 4     | Tacho              | white        | Tach output: open collector, 1 pulse per revolution, electrically isolated |

# EC centrifugal fan - RadiCal

backward-curved, single-intake  
with housing (flange)

## Curves: Air performance 50 Hz

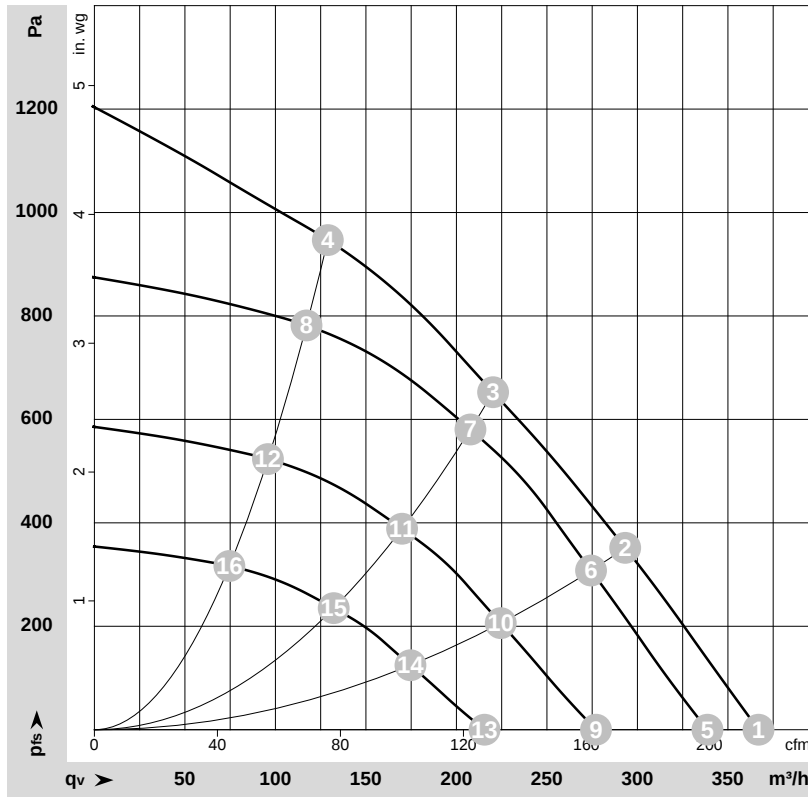

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-196752-1

Date: 2026-07-17

Nozzle: 13300-1-2950

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | Wired | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-------|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|    |       | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 1~    | 230 | 50 | 5960              | 80              | 0.70 | 76                | 80                | 365               | 0               | 215            | 0.00            |
| 2  | 1~    | 230 | 50 | 5880              | 84              | 0.73 | 72                | 77                | 295               | 350             | 170            | 1.41            |
| 3  | 1~    | 230 | 50 | 5750              | 85              | 0.75 | 69                | 75                | 220               | 650             | 130            | 2.61            |
| 4  | 1~    | 230 | 50 | 6050              | 79              | 0.70 | 69                | 76                | 130               | 950             | 75             | 3.81            |
| 5  | 1~    | 230 | 50 | 5500              | 63              | 0.55 | 74                | 78                | 340               | 0               | 200            | 0.00            |
| 6  | 1~    | 230 | 50 | 5500              | 69              | 0.59 | 71                | 76                | 275               | 308             | 160            | 1.24            |
| 7  | 1~    | 230 | 50 | 5500              | 71              | 0.62 | 67                | 73                | 210               | 581             | 120            | 2.33            |
| 8  | 1~    | 230 | 50 | 5500              | 60              | 0.52 | 67                | 74                | 115               | 783             | 70             | 3.14            |
| 9  | 1~    | 230 | 50 | 4500              | 35              | 0.30 | 69                | 73                | 275               | 0               | 165            | 0.00            |
| 10 | 1~    | 230 | 50 | 4500              | 38              | 0.33 | 65                | 71                | 225               | 206             | 130            | 0.83            |
| 11 | 1~    | 230 | 50 | 4500              | 39              | 0.34 | 62                | 68                | 170               | 389             | 100            | 1.56            |
| 12 | 1~    | 230 | 50 | 4500              | 33              | 0.29 | 62                | 69                | 95                | 524             | 55             | 2.10            |
| 13 | 1~    | 230 | 50 | 3500              | 16              | 0.14 | 63                | 67                | 215               | 0               | 125            | 0.00            |
| 14 | 1~    | 230 | 50 | 3500              | 18              | 0.15 | 59                | 64                | 175               | 125             | 105            | 0.50            |
| 15 | 1~    | 230 | 50 | 3500              | 18              | 0.16 | 56                | 62                | 130               | 235             | 80             | 0.94            |
| 16 | 1~    | 230 | 50 | 3500              | 15              | 0.13 | 56                | 62                | 75                | 317             | 45             | 1.27            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase