

EC centrifugal fan

forward-curved, single-intake
with housing (flange)



G3G140-AV19-02 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G140-AV19-02	
Motor	M3G055-CF	
Phase		1~
Nominal voltage	VAC	115
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1850
Power consumption	W	71
Current draw	A	1.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	2.4 kg
Fan size	140 mm
Rotor surface	Thick-film passivated
Electronics housing material	Die-cast aluminum
Impeller material	Sheet steel, galvanized
Housing material	Die-cast aluminum
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent as per EN 60034-5
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for motor
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1
Approval	EAC; UL 2111



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

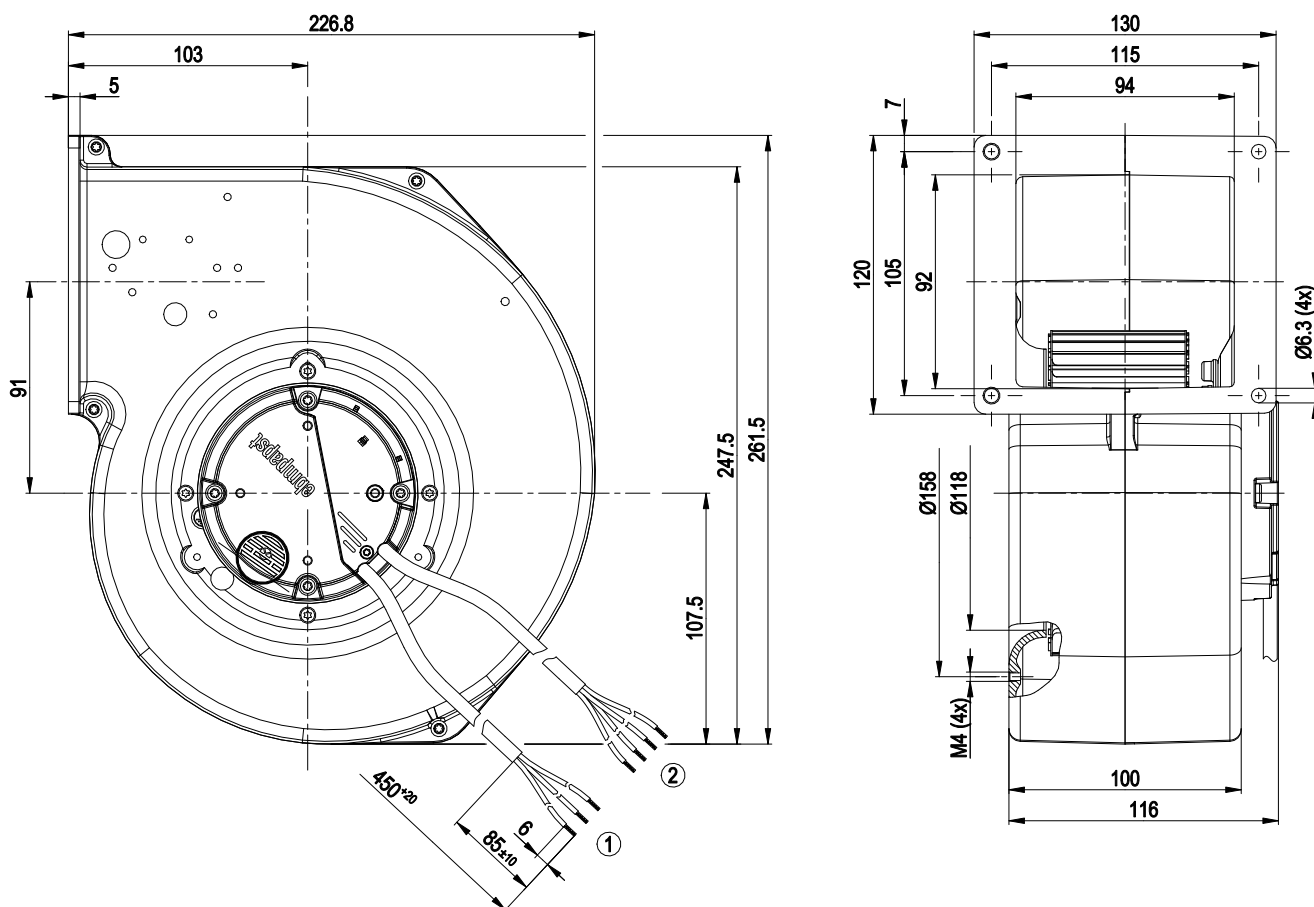


- | | |
|---|--|
| 1 | Cable PVC 3G AWG20, 3x crimped splices |
| 2 | Cable PVC 4x AWG22, 4x crimped splices |

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

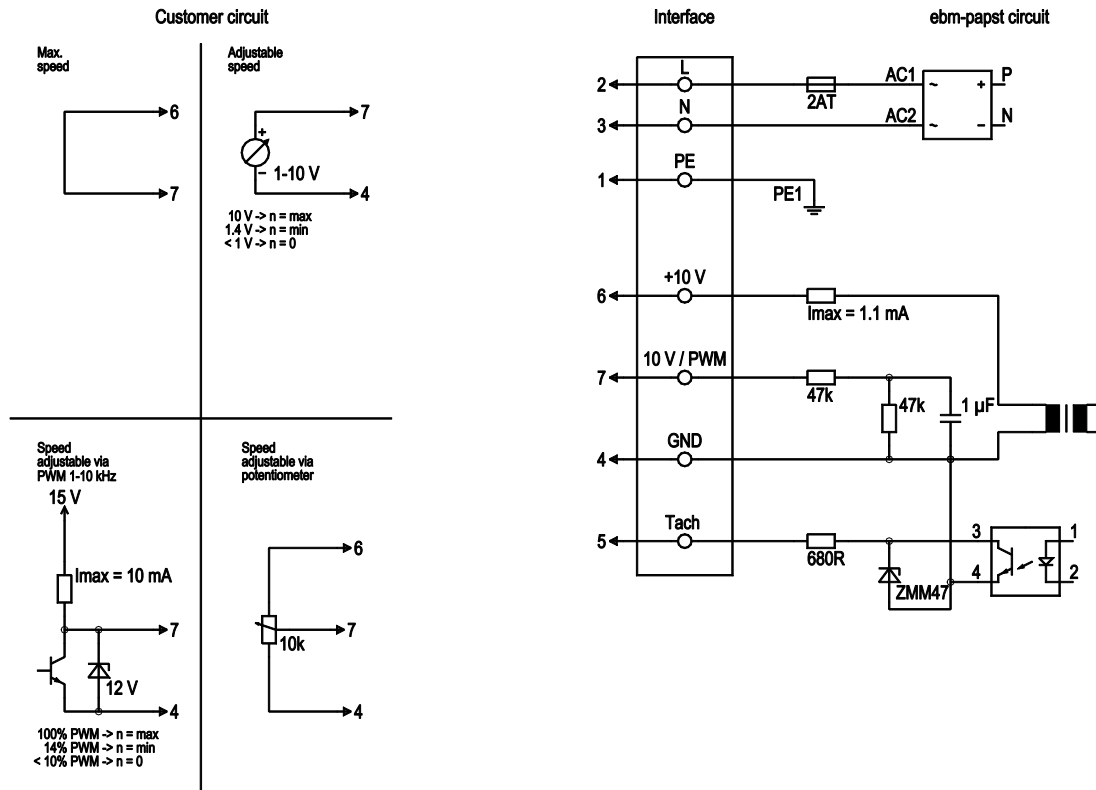


No.	Conn.	Designation	Color	Function/assignment
	1	PE	green/yellow	Protective earth
	2	L	brown	Power supply 115 VAC, 50-60 Hz, see nameplate for voltage range
	3	N	blue	Neutral conductor
	4	GND	blue	GND connection for control interface
	5	Tach	white	Tach output: open collector, 1 pulse per revolution, electrically isolated
	6	10V/ max. 1,1mA	red	Voltage output 10 V / 1.1mA, electrically isolated
	7	0-10V PWM	yellow	Control input 0-10 V or PWM, electrically isolated

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

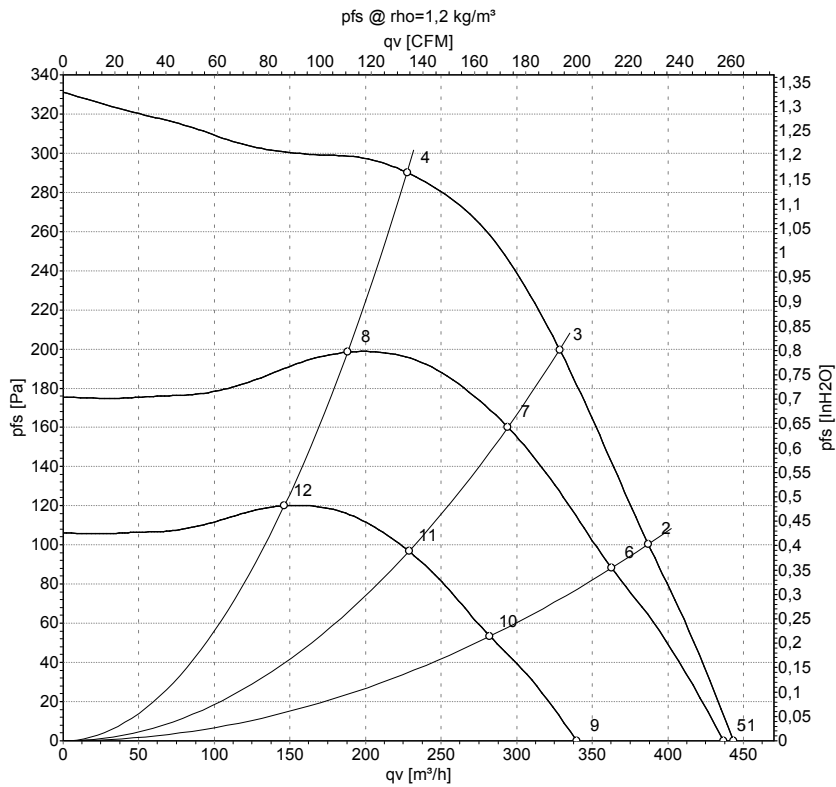

Measurement: LU-77636-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	115	50	1850	71	1.10	445	0	260	0.00
2	115	50	1920	65	0.96	385	100	230	0.40
3	115	50	2010	58	0.85	330	200	195	0.80
4	115	50	2175	45	0.67	225	290	135	1.16
5	115	50	1800	68	1.00	435	0	255	0.00
6	115	50	1800	54	0.79	365	87	215	0.35
7	115	50	1800	41	0.61	295	161	175	0.65
8	115	50	1800	26	0.38	190	199	110	0.80
9	115	50	1400	32	0.47	340	0	200	0.00
10	115	50	1400	25	0.37	280	53	165	0.21
11	115	50	1400	19	0.29	230	97	135	0.39
12	115	50	1400	12	0.18	145	120	85	0.48

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

