

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

G3G146-HK07-11 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G146-HK07-11	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		fa
Speed (rpm)	min ⁻¹	2255
Power consumption	W	163
Current draw	A	1.3
Min. back pressure	Pa	0
Min. back pressure	inH2O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	45.2	32.1
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		57.1	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.13
09 Air flow q_v	m³/h	350
09 Pressure increase p_{fs}	Pa	564
10 Speed (rpm) n	min ⁻¹	3050
11 Specific ratio*		1.01

* Specific ratio = $1 + p_s / 100\,000\text{ Pa}$

LU-139323



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	2.74 kg
Fan size	146 mm
Impeller material	Sheet steel, galvanized
Housing material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Locked-rotor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1; CE



EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

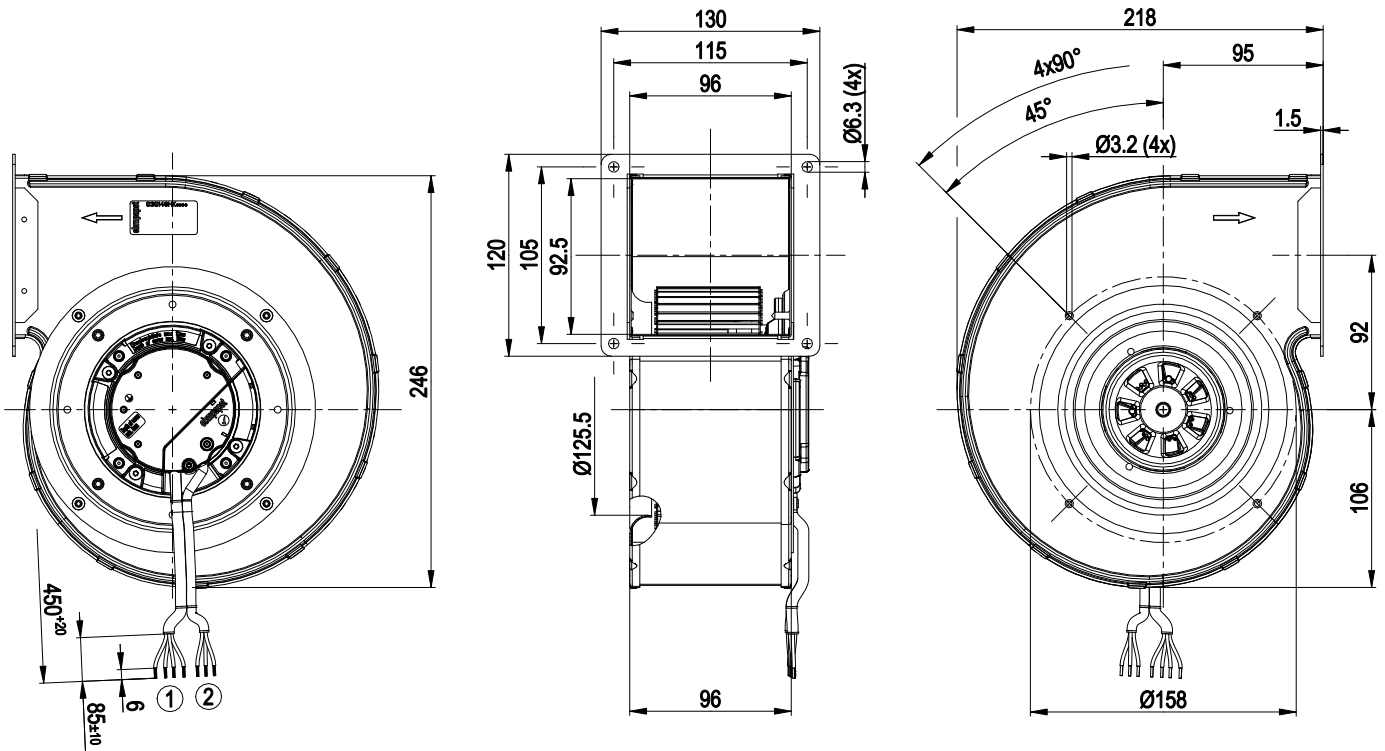


- | | |
|---|---|
| 1 | Cable PVC 4x 0.5 mm ² , 4x crimped splices |
| 2 | Cable PVC 3G 0.5 mm ² , 3x crimped splices |

EC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram

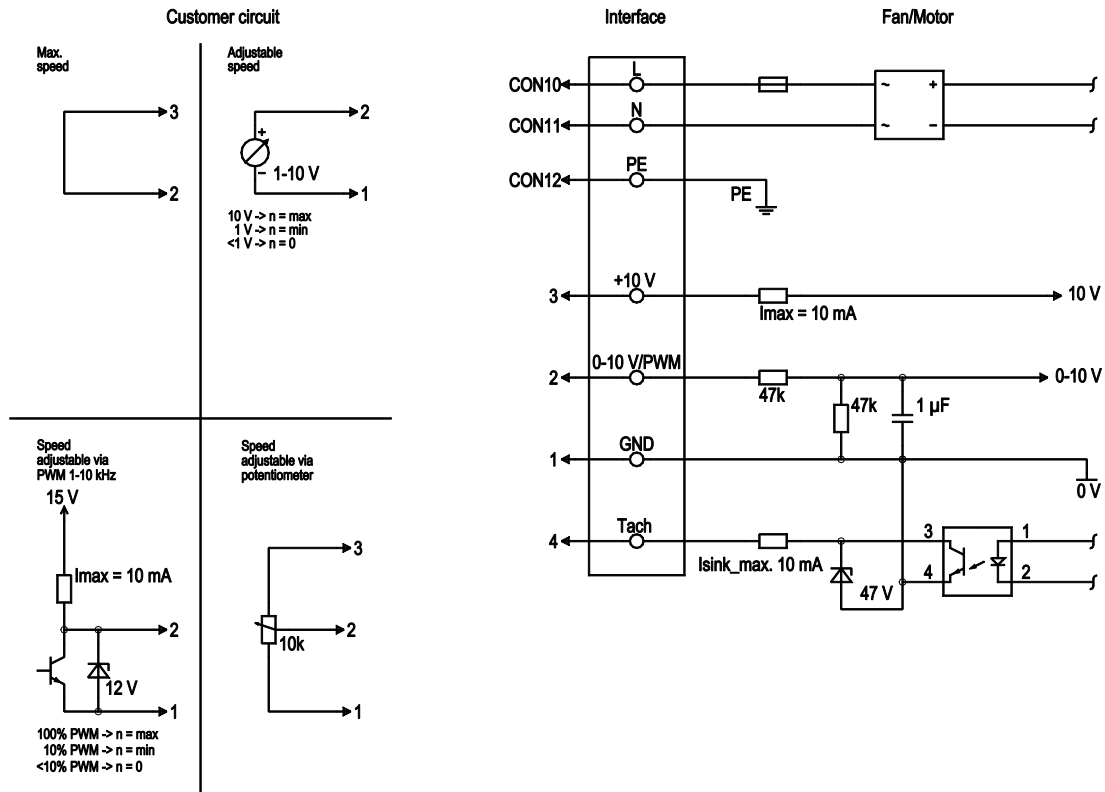


No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, R _i =100 kΩ, SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, I _{sink max} = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, I _{max} . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	1	GND	blue	Reference ground for control interface, SELV

EC centrifugal fan

forward-curved, single-intake

with housing (flange)

Curves: Air performance 50 Hz

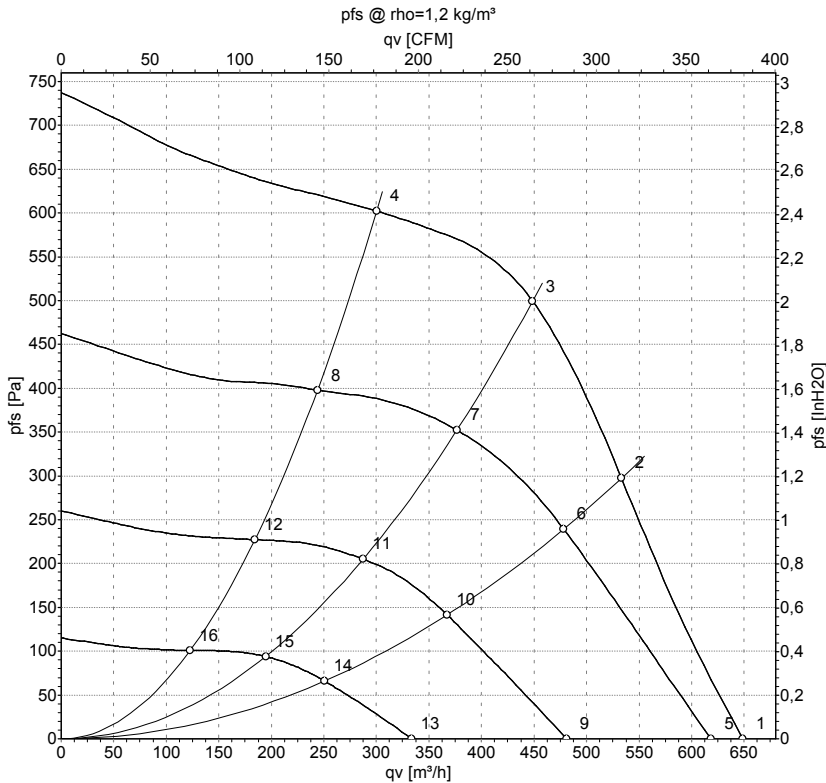

Measurement: LU-139323-1
 Measurement: LU-139324-1
 Measurement: LU-139325-1
 Measurement: LU-139326-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	inH2O
1	230	50	2255	163	1.30	70	77	650	0	380	0.00
2	230	50	2620	163	1.30	68	75	535	300	315	1.20
3	230	50	2910	163	1.30	67	74	450	500	265	2.01
4	230	50	3115	128	1.08	68	74	300	600	175	2.41
5	230	50	2220	146	1.23			620	0	365	0.00
6	230	50	2350	119	0.99			480	239	280	0.96
7	230	50	2445	98	0.83			375	352	220	1.41
8	230	50	2555	72	0.62			245	398	145	1.60
9	230	50	1740	71	0.61			480	0	285	0.00
10	230	50	1820	56	0.49			365	142	215	0.57
11	230	50	1875	47	0.41			285	205	170	0.82
12	230	50	1950	35	0.31			185	227	110	0.91
13	230	50	1215	27	0.24			335	0	195	0.00
14	230	50	1255	22	0.20			250	66	150	0.26
15	230	50	1285	18	0.17			195	94	115	0.38
16	230	50	1315	14	0.14			125	101	70	0.41

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 q_v = Air flow · p_{fs} = Pressure increase

