

# EC centrifugal fan

forward curved, single inlet

with housing (flange)

G3G180-EU60-11 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Muldingen  
County court Stuttgart · HRA 590344General partner Elektrobau Muldingen GmbH · Headquarters Muldingen  
County court Stuttgart · HRB 590142

## Nominal data

|                          |                       |            |
|--------------------------|-----------------------|------------|
| <b>Type</b>              | <b>G3G180-EU60-11</b> |            |
| <b>Motor</b>             | <b>M3G074-CF</b>      |            |
| Phase                    |                       | 1~         |
| Nominal voltage          | VAC                   | 230        |
| Nominal voltage range    | VAC                   | 200 .. 277 |
| Frequency                | Hz                    | 50         |
| Type of data definition  |                       | ml         |
| Speed (rpm)              | min <sup>-1</sup>     | 1300       |
| Power input              | W                     | 165        |
| Current draw             | A                     | 1.25       |
| Min. ambient temperature | °C                    | -25        |
| Max. ambient temperature | °C                    | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



# EC centrifugal fan

forward curved, single inlet  
with housing (flange)

## Technical features

|  |  |
|--|--|
| Mass   | 5.5 kg   |
| Size   | 180 mm   |
| Surface of rotor   | Coated in black  |
| Material of electronics housing                                    | Die-cast aluminium   |
| Material of impeller   | Sheet steel, hot-dip galvanised  |
| Housing material   | Sheet steel, hot-dip galvanised  |
| Direction of rotation  | Clockwise, seen on rotor   |
| Type of protection   | IP 44  |
| Insulation class   | "B"  |
| Humidity (F)/environmental protection class (H)                    | F3-1   |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C  |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C  |
| Mounting position  | Any  |
| Condensate discharge holes   | None   |
| Operation mode   | S1   |
| Motor bearing  | Ball bearing   |
| Technical features   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> </ul> |
| EMC interference immunity  | Acc. to EN 61000-6-2 (industrial environment)  |
| EMC harmonics  | Acc. to EN 61000-3-2/3   |
| EMC interference emission  | Acc. to EN 61000-6-3 (household environment)   |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA  |
| Motor protection   | Thermal overload protector (TOP) wired internally  |
| Cable exit   | Variable   |
| Protection class   | I (if protective earth is connected by customer)   |
| Product conforming to standard                                     | EN 60335-1   |
| Approval   | CSA C22.2 No.77; UL 2111   |






# EC centrifugal fan

forward curved, single inlet  
with housing (flange)

## Connection screen

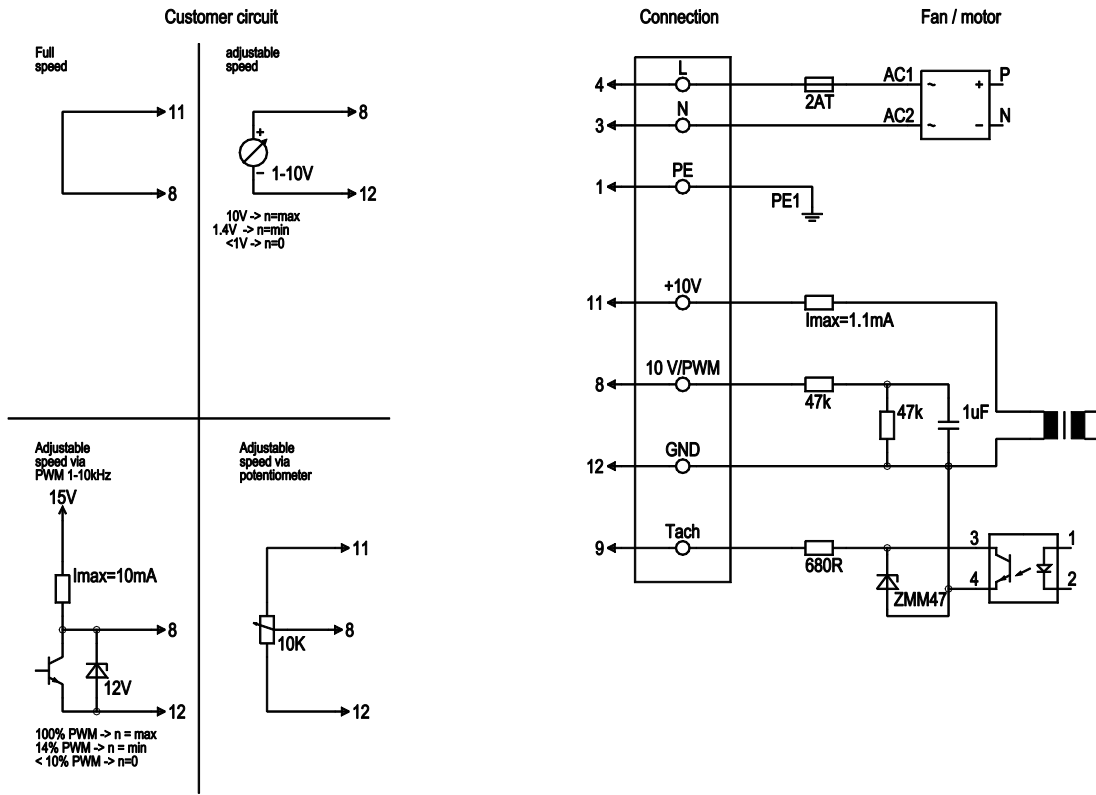

| No. | Conn. | Designation      | Colour       | Function / assignment  |
|-----|-------|------------------|--------------|--|
|     | 4     | L                | black        | Power supply 230 VAC, 50-60 Hz, see type plate for voltage range           |
|     | 3     | N                | blue         | Neutral conductor  |
|     | 1     | PE               | green/yellow | Protective earth   |
|     | 8     | 0-10 V PWM       | yellow       | Control input 0 - 10 V or PWM, electrically isolated                       |
|     | 9     | Tach             | white        | Tach output: open collector, 1 pulse per revolution, electrically isolated |
|     | 11    | 10V / max 1.1 mA | red          | Voltage output 10 V / max. 1.1 mA, electrically isolated                   |
|     | 12    | GND              | blue         | GND - Connection for control interface                                     |




# EC centrifugal fan

forward curved, single inlet

with housing (flange)

## Charts: Air flow 50 Hz

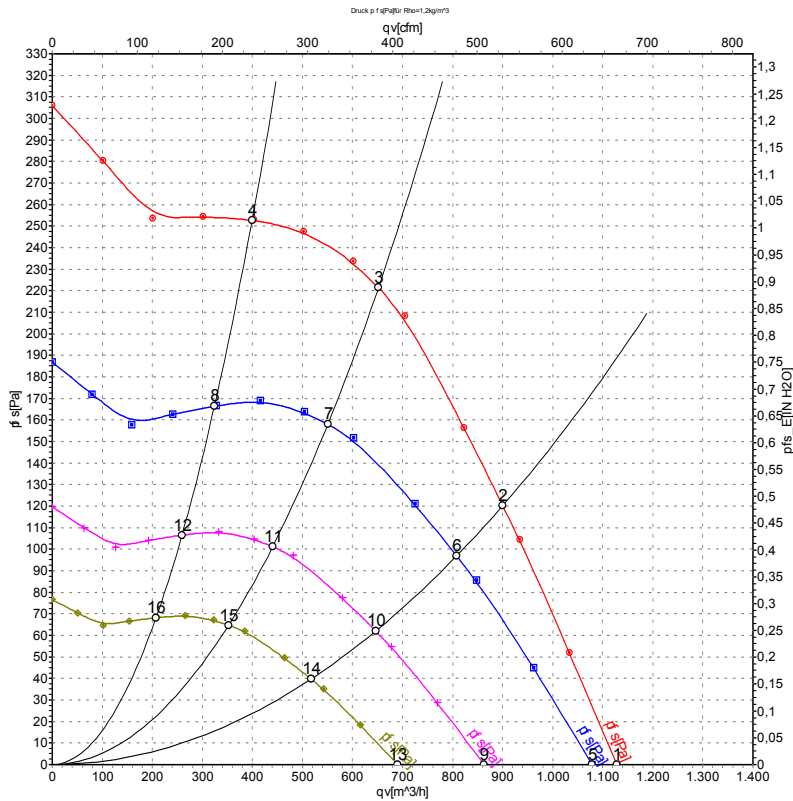

Measurement: LU-117663-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | inH2O           |
| 1  | 230 | 50 | 1300              | 165             | 1.25 | 68                | 73                | 1130           | 0               | 665            | 0.00            |
| 2  | 230 | 50 | 1390              | 133             | 0.99 | 65                | 71                | 900            | 120             | 530            | 0.48            |
| 3  | 230 | 50 | 1480              | 98              | 0.73 | 62                | 69                | 650            | 220             | 385            | 0.88            |
| 4  | 230 | 50 | 1540              | 68              | 0.51 | 61                | 68                | 400            | 250             | 235            | 1.00            |
| 5  | 230 | 50 | 1250              | 146             | 1.07 | 67                | 72                | 1080           | 0               | 635            | 0.00            |
| 6  | 230 | 50 | 1250              | 97              | 0.72 | 62                | 69                | 810            | 97              | 475            | 0.39            |
| 7  | 230 | 50 | 1250              | 59              | 0.44 | 59                | 66                | 550            | 158             | 325            | 0.63            |
| 8  | 230 | 50 | 1250              | 36              | 0.27 | 56                | 64                | 325            | 167             | 190            | 0.67            |
| 9  | 230 | 50 | 1000              | 75              | 0.55 | 62                | 67                | 865            | 0               | 510            | 0.00            |
| 10 | 230 | 50 | 1000              | 50              | 0.37 | 57                | 64                | 645            | 62              | 380            | 0.25            |
| 11 | 230 | 50 | 1000              | 30              | 0.23 | 54                | 61                | 440            | 101             | 260            | 0.41            |
| 12 | 230 | 50 | 1000              | 18              | 0.14 | 52                | 59                | 260            | 107             | 150            | 0.43            |
| 13 | 230 | 50 | 800               | 38              | 0.28 | 57                | 63                | 690            | 0               | 405            | 0.00            |
| 14 | 230 | 50 | 800               | 25              | 0.19 | 53                | 59                | 515            | 40              | 305            | 0.16            |
| 15 | 230 | 50 | 800               | 16              | 0.12 | 49                | 56                | 350            | 65              | 205            | 0.26            |
| 16 | 230 | 50 | 800               | 9.5             | 0.07 | 47                | 54                | 205            | 68              | 120            | 0.27            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
P<sub>fs</sub> = Pressure increase

