

EC centrifugal fan

backward-curved, single-intake
with housing (flange), Gas blower for condensing boilers



G3G200-GN18-26 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G3G200-GN18-26	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	208 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	5700
Power consumption	W	750
Current draw	A	3.6 (208V)
Min. ambient temperature	°C	-20
Max. ambient temperature	°C	60
Min. temp. of flow medium	°C	0
Max. temp. of flow medium	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	54.3	48.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		67.1	61
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.6
09 Air flow q_v	m³/h	485
09 Pressure increase p_{fs}	Pa	2219
10 Speed (rpm) n	min ⁻¹	5710
11 Specific ratio*		1.02

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-76333



EC centrifugal fan

backward-curved, single-intake

with housing (flange), Gas blower for condensing boilers

Technical description


Weight	9.2 kg
Fan size	200 mm
Rotor surface	Painted black
Cover material	Polyflam RPP 374-ND CS1 (UL 97-V0)
Impeller material	Sheet aluminum
Housing material	Die-cast aluminum
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Tach output - Thermal overload protection for electronics/motor - PFC, active - Motor current limitation - Undervoltage/phase failure detection - Control input PWM - Control input 0-10 V
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Locked-rotor protection
Protection class	I (with customer connection of protective earth)
Conformity with standards	CE
Approval	VDE



EC centrifugal fan

backward-curved, single-intake
with housing (flange), Gas blower for condensing boilers

Product drawing

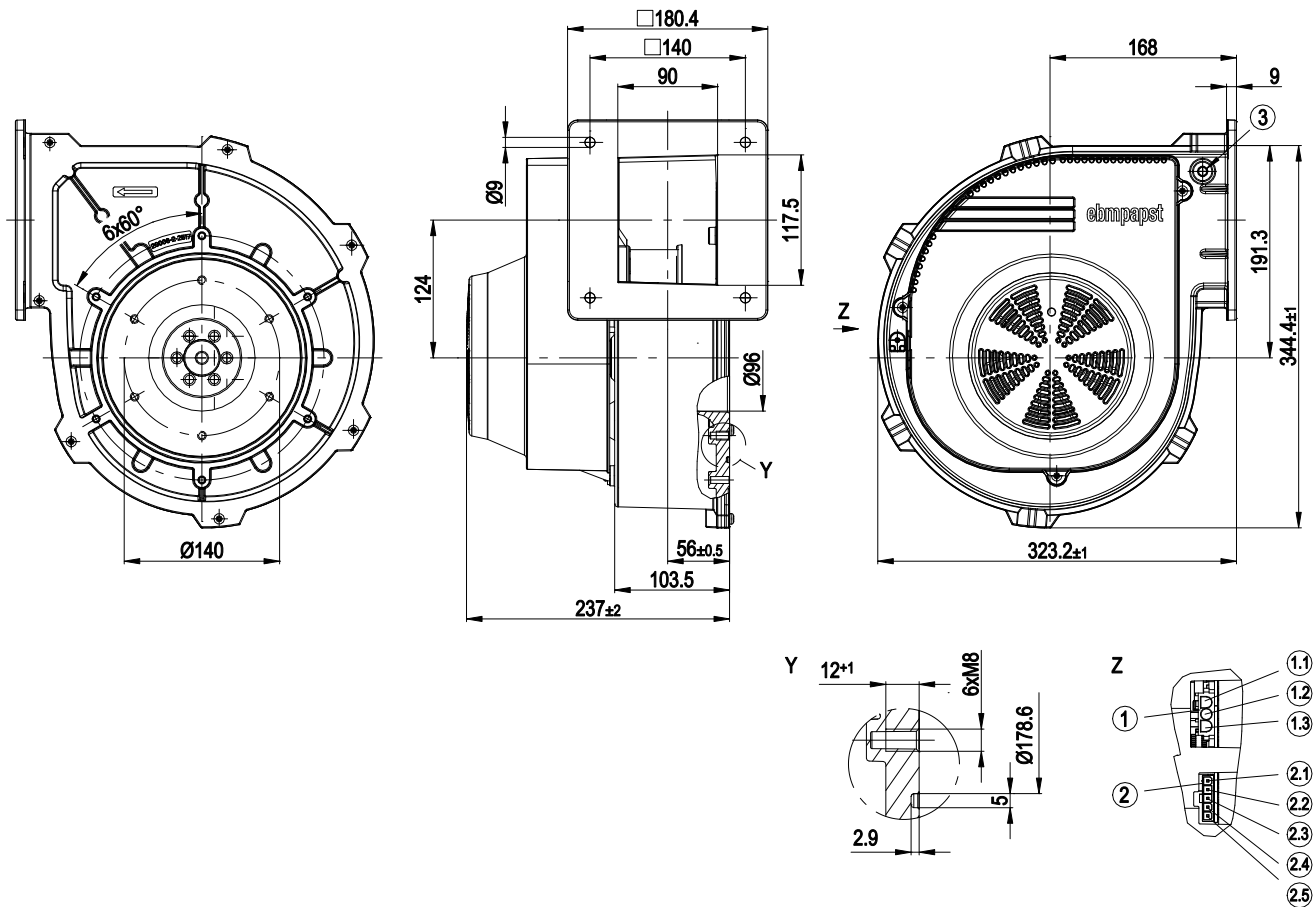


Y	Detail Y
Z	View Z/pin assignment
1	3-pole header, fits mating connector (not included in scope of delivery) Tyco no. 350766-1, socket Tyco no. 926884-1
1.1	L
1.2	N
1.3	PE
2	5-pole header, fits mating connector (not included in scope of delivery) Molex no. 39-01-4050, socket Molex no. 39-00-0059
2.1	+
2.2	Speed monitoring
2.3	0-10 VDC
2.4	PWM input
2.5	-
3	Pressure tap available as option



EC centrifugal fan

backward-curved, single-intake
with housing (flange), Gas blower for condensing boilers

Connection diagram

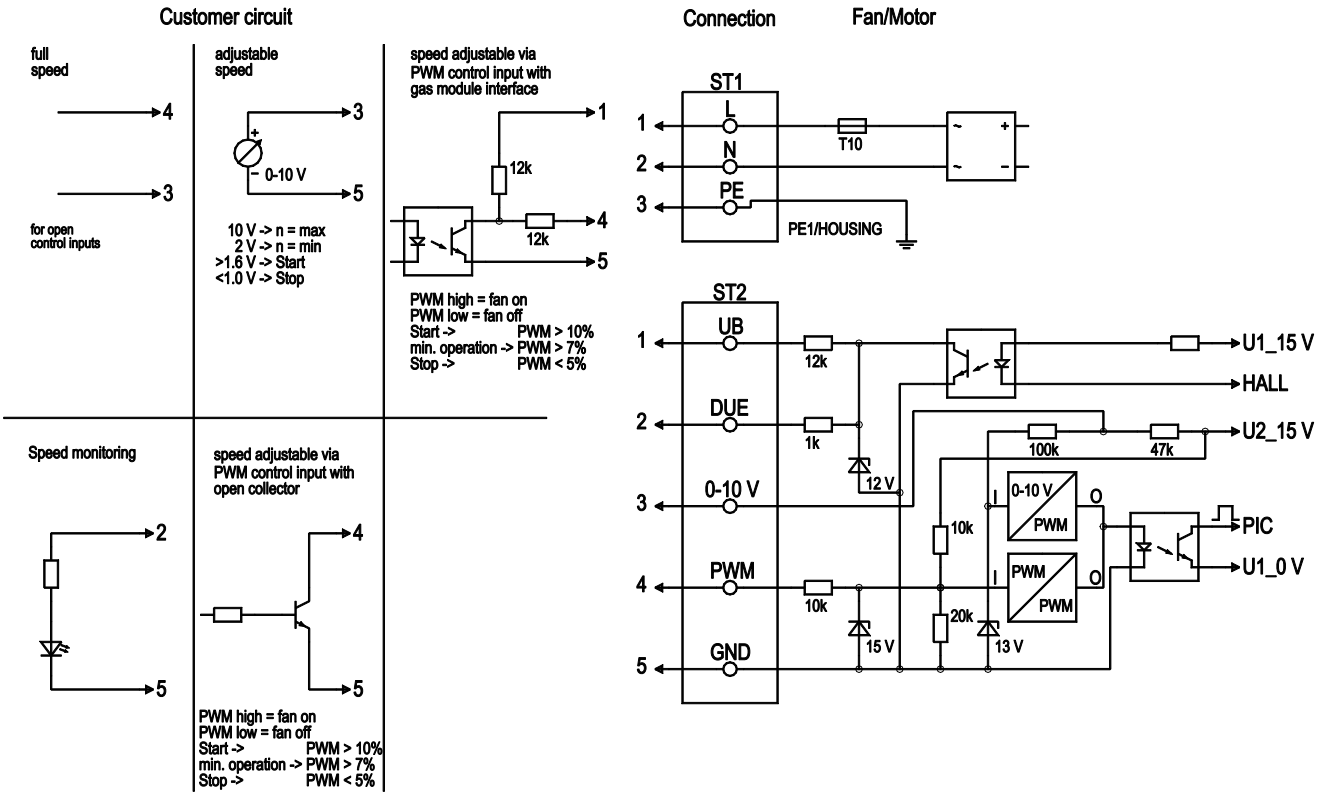


No.	Conn.	Designation	Function/assignment
ST1	1; 2; 3	L; N; PE	Power supply 230 VAC, 50-60 Hz, phase, neutral conductor, protective earth
ST2	1	UB	external voltage 16-45 VDC, maximum ripple ±3.5%, SELV
ST2	2	Tach	Speed monitoring, 3 pulses per revolution, SELV
ST2	3	0 - 10 V	Control input 0-10 V, impedance 100k, SELV
ST2	4	PWM	Control input PWM, 1-6 kHz, SELV
ST2	5	GND	GND connection for control interface, SELV



EC centrifugal fan

backward-curved, single-intake
with housing (flange), Gas blower for condensing boilers

Curves: Air performance 50 Hz

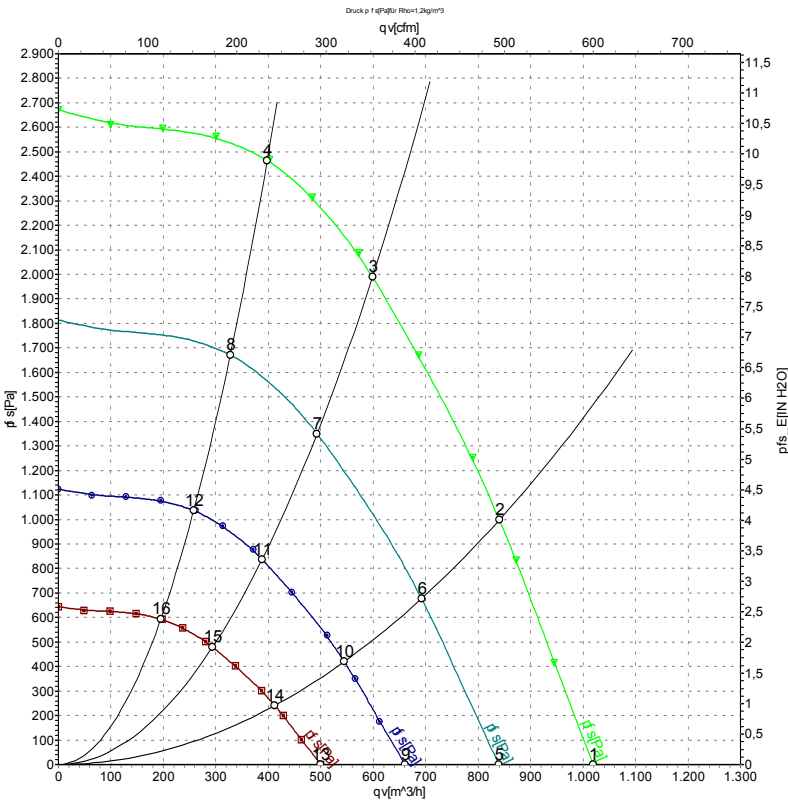

Measurement: LU-76333-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	m³/h	Pa	CFM	inH ₂ O
1	230	50	5700	681	2.97	86	1020	0	600	0.00
2	230	50	5700	750	3.30	84	840	1000	495	4.01
3	230	50	5700	682	2.98	81	600	2000	350	8.03
4	230	50	5700	557	2.44	78	400	2475	235	9.94
5	230	50	4700	381	1.66	81	840	0	495	0.00
6	230	50	4700	413	1.80	79	690	677	405	2.72
7	230	50	4700	381	1.67	76	495	1352	290	5.43
8	230	50	4700	311	1.36	74	330	1678	195	6.74
9	230	50	3700	186	0.81	75	660	0	390	0.00
10	230	50	3700	201	0.88	73	545	420	320	1.69
11	230	50	3700	186	0.81	71	390	838	230	3.36
12	230	50	3700	152	0.67	69	260	1040	150	4.18
13	230	50	2800	80	0.35	69	500	0	295	0.00
14	230	50	2800	87	0.38	66	410	240	240	0.96
15	230	50	2800	81	0.35	64	295	480	175	1.93
16	230	50	2800	66	0.29	63	195	595	115	2.39

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · qv = Air flow · p_{fs} = Pressure increase

