

# EC centrifugal fan

forward-curved, single-intake

with housing (flange)

G3G225-BD03-H1 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



## Nominal data

|                          |                    |            |
|--------------------------|--------------------|------------|
| Type                     | G3G225-BD03-H1     |            |
| Motor                    | M3G084-FA          |            |
| Phase                    |                    | 1~         |
| Nominal voltage          | VAC                | 230        |
| Nominal voltage range    | VAC                | 200 .. 277 |
| Frequency                | Hz                 | 50/60      |
| Method of obtaining data |                    | fa         |
| Speed (rpm)              | min <sup>-1</sup>  | 1450       |
| Power consumption        | W                  | 500        |
| Current draw             | A                  | 2.2        |
| Min. back pressure       | Pa                 | 0          |
| Min. back pressure       | inH <sub>2</sub> O | 0          |
| Min. ambient temperature | °C                 | -25        |
| Max. ambient temperature | °C                 | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 47.8   | 35        |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 56.8   | 44        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 0.38 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 1055 |
| 09 Pressure increase $p_{fs}$ | Pa                | 568  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1940 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 

LU-155153



# EC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Technical description


|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 7.9 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Fan size                                                                   | 225 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Impeller material                                                          | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Housing material                                                           | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Moisture (F) / Environmental (H) protection class                          | F3-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Condensation drainage holes                                                | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor bearing                                                              | Ball bearing; (sealed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Conformity with standards                                                  | EN 61800-5-1; EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Approval                                                                   | EAC; UL 1004-7 + 60730; C22.2 No.77 + CAN/CSA-E60730-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |



# EC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Product drawing

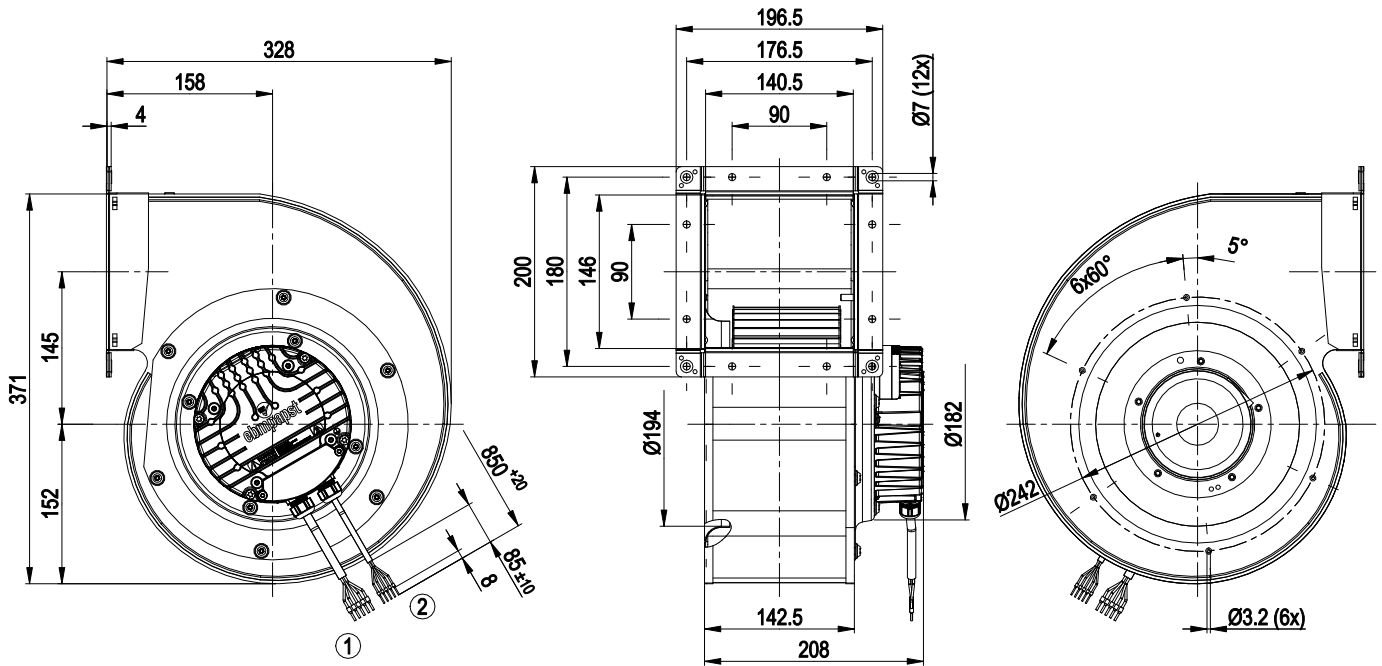


- |   |                                      |
|---|--------------------------------------|
| 1 | Cable PVC AWG18, 5x crimped ferrules |
| 2 | Cable PVC AWG22, 5x crimped ferrules |

# EC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Connection diagram

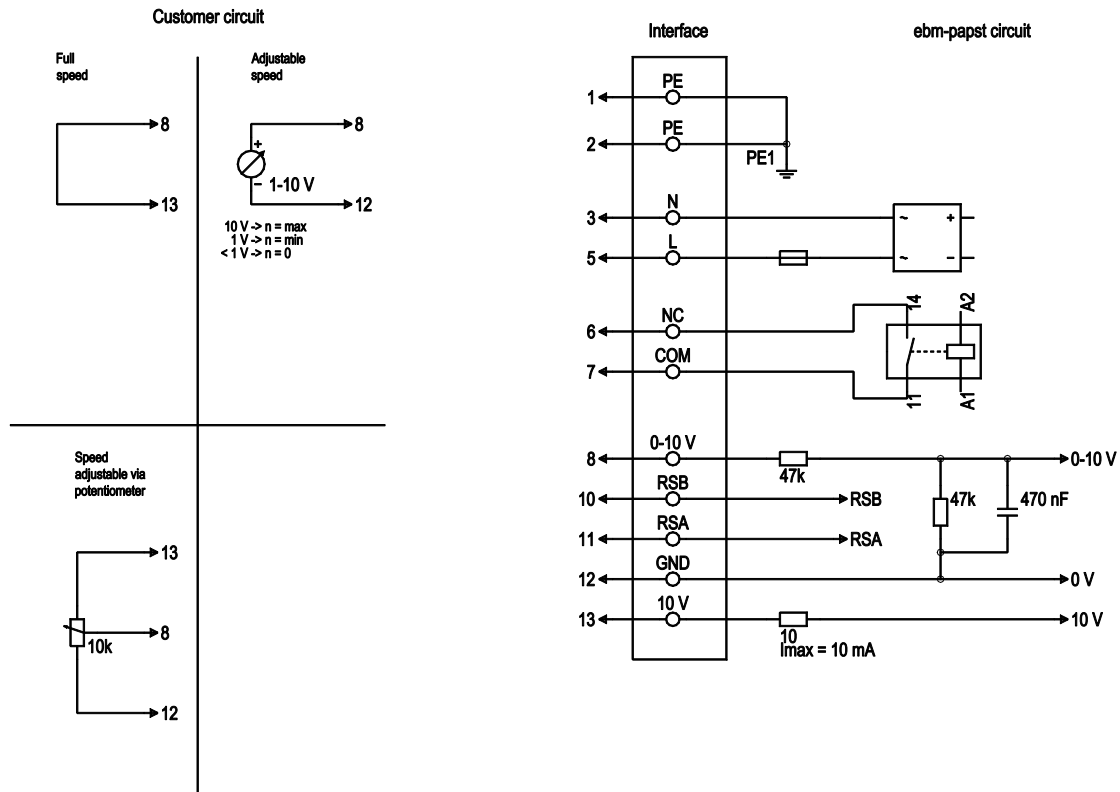


| No. | Conn. | Designation | Color        | Function/assignment                                                                                                                                                                           |
|-----|-------|-------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 1, 2  | PE          | green/yellow | Protective earth                                                                                                                                                                              |
| 1   | 3     | N           | blue         | Power supply, neutral conductor, 50/60 Hz                                                                                                                                                     |
| 1   | 5     | L           | black        | Power supply, phase, 50/60 Hz                                                                                                                                                                 |
| 1   | 6     | NC          | white 1      | Status relay, floating status contact; break for failure, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side |
| 1   | 7     | COM         | white 2      | Status relay, floating status contact; common connection, contact rating 250 VAC / 2A (AC1) / min. 10 mA, basic insulation on supply side and reinforced insulation on control interface side |
| 2   | 8     | 0-10V       | yellow       | Analog input (set value); 0-10 V; $R_i = 100\text{ k}\Omega$ ; adjustable curve                                                                                                               |
| 2   | 10    | RSB         | brown        | RS485 interface for MODBUS, RSB                                                                                                                                                               |
| 2   | 11    | RSA         | white        | RS485 interface for MODBUS, RSA                                                                                                                                                               |
| 2   | 12    | GND         | blue         | Reference ground for control interface, SELV                                                                                                                                                  |
| 2   | 13    | +10V        | red          | Fixed voltage output 10 VDC, +10 V $\pm 3\%$ ; max. 10 mA; short-circuit-proof; power supply for external devices (e.g. pot)                                                                  |

# EC centrifugal fan

forward-curved, single-intake  
with housing (flange)

## Curves: Air performance 50 Hz

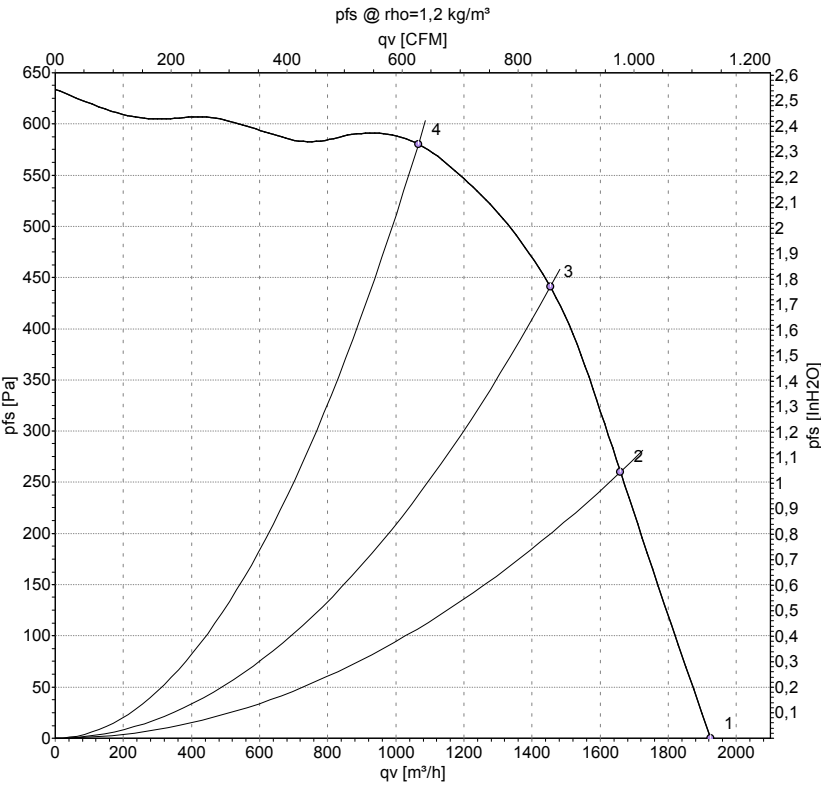

Measurement: LU-155153-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | qv   | p <sub>fs</sub> | qv   | p <sub>fs</sub> |
|---|-----|----|-------------------|-----------------|------|-------------------|-------------------|------|-----------------|------|-----------------|
|   | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h | Pa              | CFM  | inH2O           |
| 1 | 230 | 50 | 1450              | 500             | 2.20 | 76                | 82                | 1925 | 0               | 1130 | 0.00            |
| 2 | 230 | 50 | 1670              | 500             | 2.20 | 75                | 80                | 1660 | 260             | 975  | 1.04            |
| 3 | 230 | 50 | 1835              | 500             | 2.17 | 74                | 79                | 1455 | 440             | 855  | 1.77            |
| 4 | 230 | 50 | 1935              | 392             | 1.72 | 72                | 78                | 1065 | 580             | 625  | 2.33            |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
qv = Air flow · p<sub>fs</sub> = Pressure increase

