

AC centrifugal fan

forward-curved, single-intake

with housing (flange)

G4D200-CD08-12 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



Nominal data

Type	G4D200-CD08-12	
Motor	M4D068-GA	
Phase		3~
Nominal voltage	VAC	415
Wiring		Y
Frequency	Hz	50
Method of obtaining data		fa
Valid for approval/standard		CE
Speed (rpm)	min ⁻¹	1200
Power consumption	W	370
Current draw	A	0.62
Min. back pressure	Pa	0
Min. back pressure	inH ₂ O	0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	25

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_e	%	40.2	37.5
02 Measurement category		B	
03 Efficiency category		Total	
04 Efficiency grade N		51.7	49
05 Variable speed drive		No	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.15
09 Air flow q_v	m ³ /h	795
09 Pressure increase p_f	Pa	278
10 Speed (rpm) n	min ⁻¹	1415
11 Specific ratio*		1.00

* Specific ratio = $1 + p_f / 100\,000\text{ Pa}$

LU-11934



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Technical description


Weight	7.2 kg
Fan size	200 mm
Rotor surface	Unpainted
Impeller material	Sheet steel, painted black
Housing material	Sheet steel, galvanized
Direction of rotation	Counterclockwise, viewed toward rotor
Degree of protection	IP44; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F1-1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	< 0.75 mA
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1, motor does not have factory-installed overheating protection; CE



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Product drawing

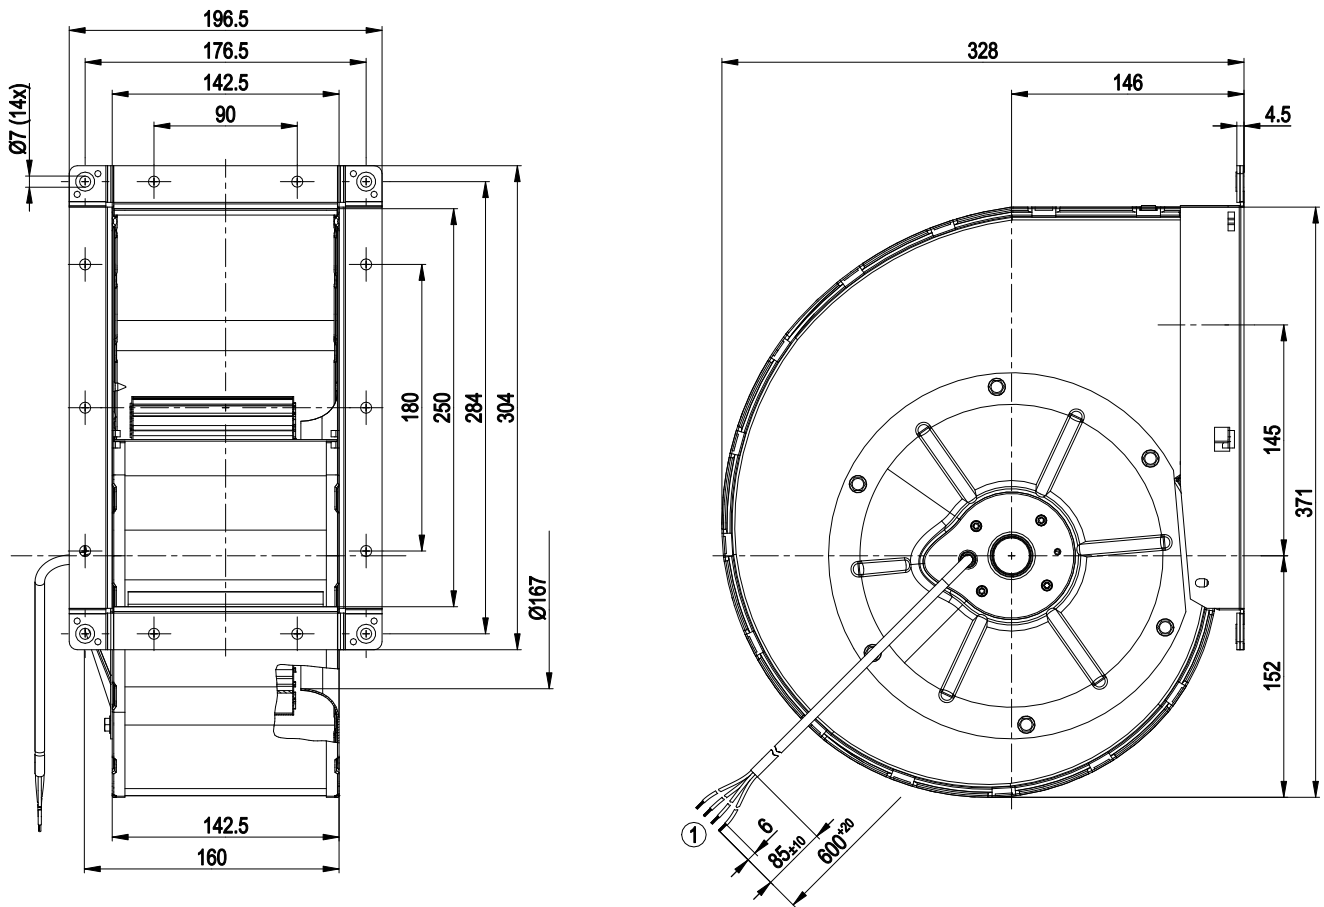


1 Cable PVC 4G 0.5 mm², 4x crimped splices

AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Connection diagram



Change of rotation direction by reversing two phases


	Three-phase motor	Y	Star connection	L1	black
L2	blue	L3	brown	PE	green/yellow



AC centrifugal fan

forward-curved, single-intake
with housing (flange)

Curves: Air performance 50 Hz

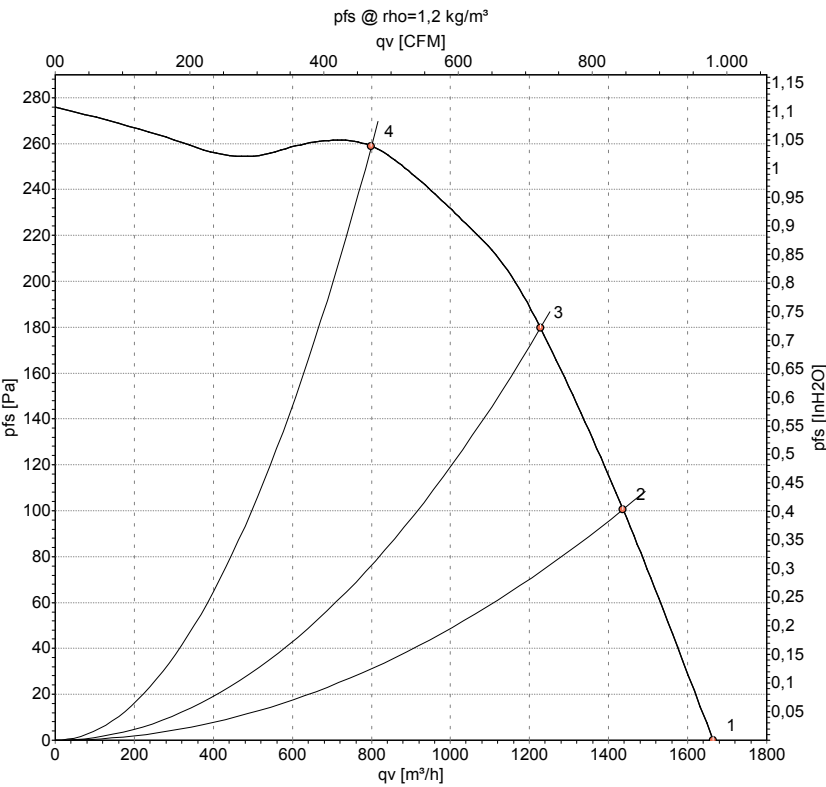

Measurement: LU-11934-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _e	I	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	CFM	inH2O
1	415	50	1200	370	0.62	1665	0	980	0.00
2	415	50	1300	287	0.49	1435	100	845	0.40
3	415	50	1340	238	0.43	1230	180	725	0.72
4	415	50	1415	153	0.35	800	260	470	1.04

U = Power supply · f = Frequency · n = Speed (rpm) · P_e = Power consumption · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

