

AC centrifugal fan

forward curved, single inlet
with housing (flange)



G4D225-FK10-03 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	G4D225-FK10-03		
Motor	M4D094-FA		
Phase		3~	3~
Nominal voltage	VAC	400	400
Connection		Y	Y
Frequency	Hz	50	60
Type of data definition		fa	ml
Valid for approval / standard		CE	CE
Speed	min ⁻¹	1350	1500
Power input	W	380	540
Current draw	A	0.75	0.94
Min. back pressure	Pa	0	50
Min. ambient temperature	°C	-40	-40
Max. ambient temperature	°C	90	55
Starting current	A	2.8	2.7

ml = max. load · me = max. efficiency · fa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

Data according to ErP directive

Installation category	A
Efficiency category	Static
Variable speed drive	No
Specific ratio*	1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

		Actual	Request 2013	Request 2015
Overall efficiency η_{es}		34.2	26	33
Efficiency grade N		45.2	37	44
Power input P_e	kW	0.18		
Air flow q_v	m ³ /h	755		
Pressure increase p_{fs}	Pa	295		
Speed n	min ⁻¹	1445		

Data established at point of optimum efficiency



AC centrifugal fan

forward curved, single inlet
with housing (flange)

Technical features


Mass	9.5 kg
Size	225 mm
Surface of rotor	Coated in black
Material of impeller	Sheet steel, hot-galvanised
Housing material	Sheet steel, hot-galvanised
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 54
Insulation class	"F"
Humidity class	F4-1
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Any
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) brought out
Cable exit	Variable
Protection class	I (if protective earth is connected by customer)
Product conforming to standard	EN 60034-1 (2004); CE
Approval	CCC



AC centrifugal fan

forward curved, single inlet
with housing (flange)

Product drawing

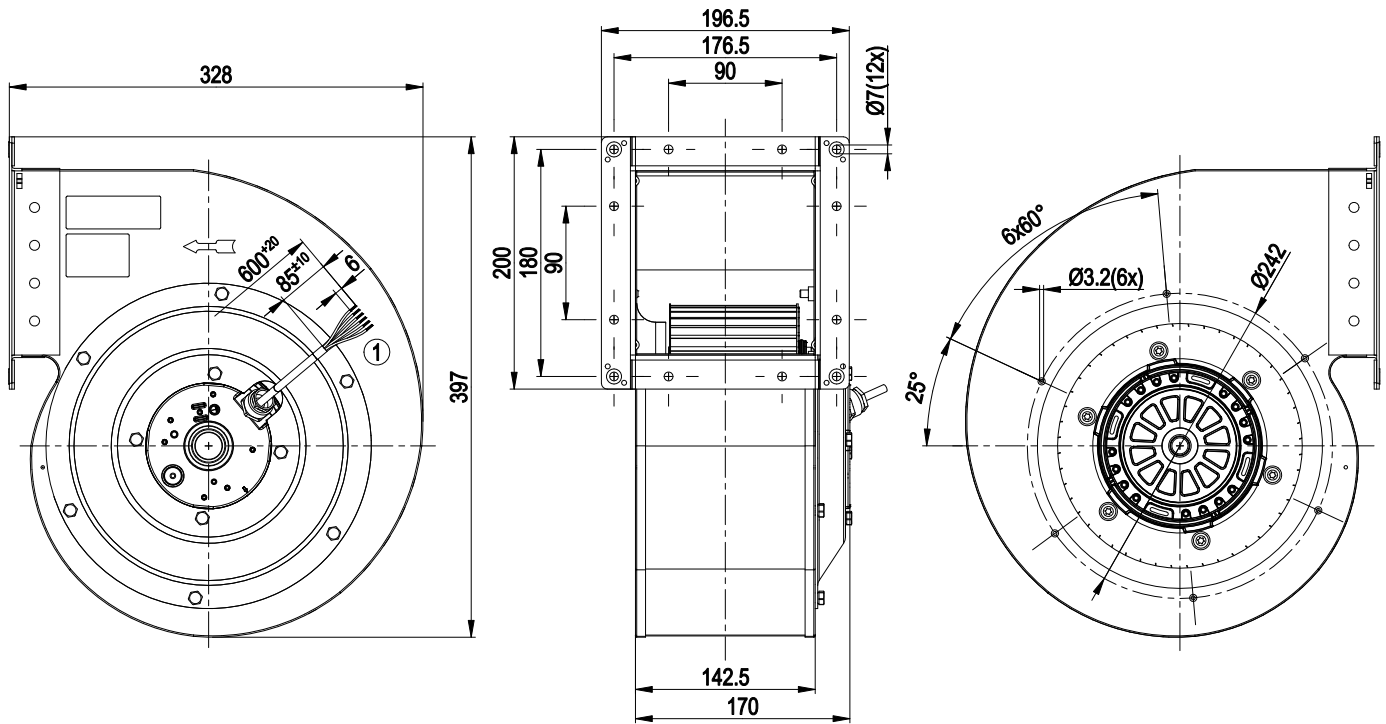


1 Connection line silicone 6G 0.5 mm², 6 x brass lead tips crimped

AC centrifugal fan

forward curved, single inlet
with housing (flange)

Connection screen

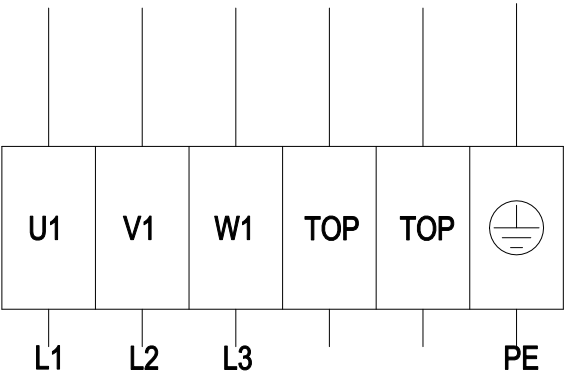


Δ	Star connection	L1	= U1 = black	L2	= V1 = blue
L3	= W1 = brown	TOP	2 x grey	PE	green/yellow



AC centrifugal fan

forward curved, single inlet
with housing (flange)

Charts: Air flow 50 Hz Y

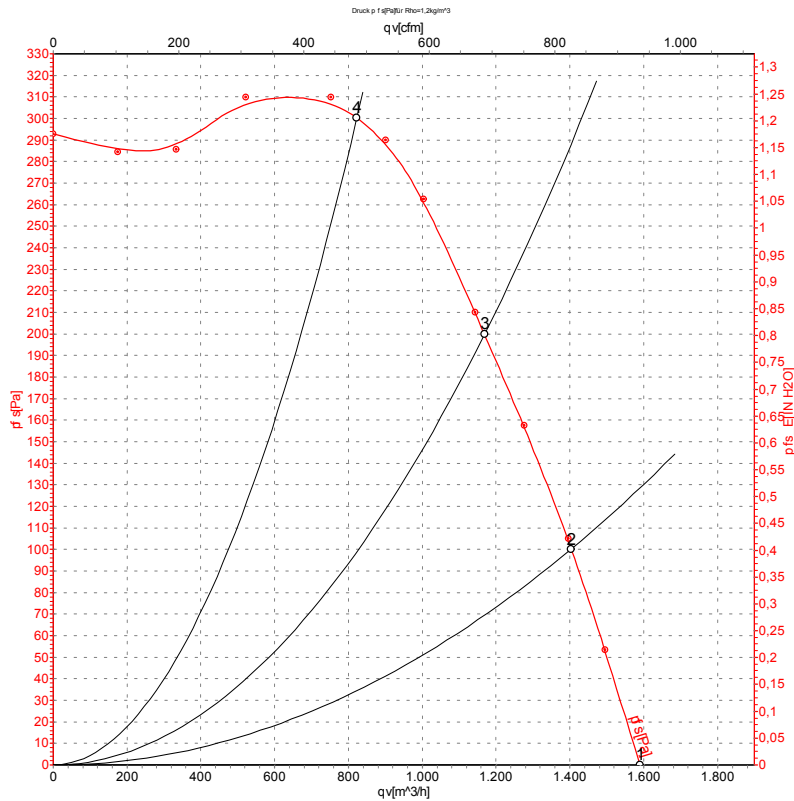

Measurement: LU-56986

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	400	50	1350	380	0.75	1590	0
2	Y	400	50	1380	326	0.69	1405	100
3	Y	400	50	1405	266	0.63	1170	200
4	Y	400	50	1435	194	0.57	825	300


Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase



AC centrifugal fan

forward curved, single inlet
with housing (flange)

Charts: Air flow 60 Hz Y

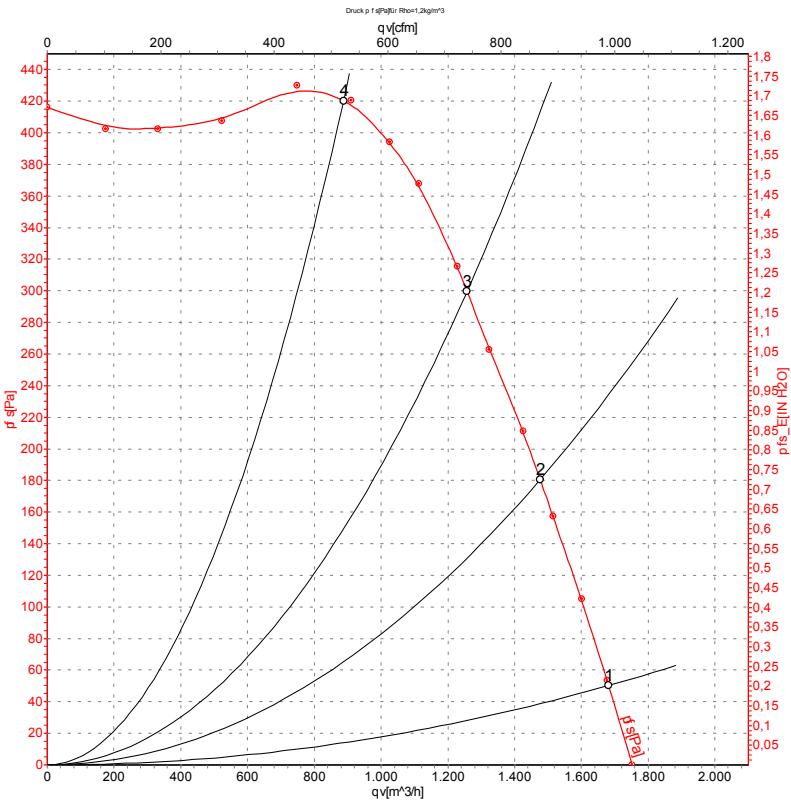

Measurement: LU-56987

Air performance measured as per ISO 5801
Installation category A. For detailed
information on the measuring set-up, please
contact ebm-papst. Suction-side noise
levels: L_{WA} measured as per ISO 13347 /
L_{pA} measured with 1m distance to fan axis.
The values given are valid under the
measuring conditions mentioned above and
may vary according to the actual installation
situation. With any deviation from the
standard set-up, the specific values have to
be checked and reviewed with the unit
installed.

Measured values

	Conn.	U	f	n	P _e	I	qv	p _{fs}
		V	Hz	min ⁻¹	W	A	m³/h	Pa
1	Y	400	60	1500	540	0.94	1680	50
2	Y	400	60	1570	457	0.81	1475	180
3	Y	400	60	1615	380	0.70	1255	300
4	Y	400	60	1680	269	0.55	885	420

Conn. = Connection · U = Supply voltage · f = Frequency · n = Speed · P_e = Power input · I = Current draw · qv = Air flow · p_{fs} = Pressure increase

