

K1G200-AD65-04

# EC diagonal module

single inlet  
with support bracket



K1G200-AD65-04 ebmpapst Datasheet

[sales@fansco.com](mailto:sales@fansco.com)

[www.fansco.com](http://www.fansco.com)

## Nominal data

Type	K1G200-AD65-04	
Motor	M1G074-BF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Type of data definition		fa
State		prelim.
Speed	min <sup>-1</sup>	3400
Power input	W	95
Current draw	A	4.7
Max. back pressure	Pa	355
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations



## Technical features


<b>Mass</b>	1.8 kg
<b>Size</b>	200 mm
<b>Surface of rotor</b>	Coated in black
<b>Material of impeller</b>	Plastic PA6, fibreglass-reinforced
<b>Housing material</b>	Plastic PA6, fibreglass-reinforced
<b>Material of support bracket</b>	Plastic PA6, fibreglass-reinforced
<b>Number of blades</b>	7
<b>Direction of air flow</b>	"V"
<b>Direction of rotation</b>	Clockwise, seen on rotor
<b>Type of protection</b>	IP 44; Depending on installation and position
<b>Insulation class</b>	"B"
<b>Humidity class</b>	F4-1
<b>Max. permissible ambient motor temp. (transp./ storage)</b>	+ 80 °C
<b>Min. permissible ambient motor temp. (transp./storage)</b>	- 40 °C
<b>Mounting position</b>	Any
<b>Condensate discharge holes</b>	None
<b>Operation mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> </ul>
<b>EMC interference immunity</b>	Acc. to EN 61000-6-2 (industrial environment)
<b>EMC interference emission</b>	Acc. to EN 55022 (Class B)
<b>Motor protection</b>	Reverse polarity and locked-rotor protection
<b>Cable exit</b>	Lateral
<b>Protection class</b>	I (if protective earth is connected by customer)
<b>Product conforming to standard</b>	EN 60335-1
<b>Approval</b>	UL 1004-1; CSA C22.2 Nr.77

K1G200-AD65-04

# EC diagonal module

single inlet  
with support bracket

## Product drawing

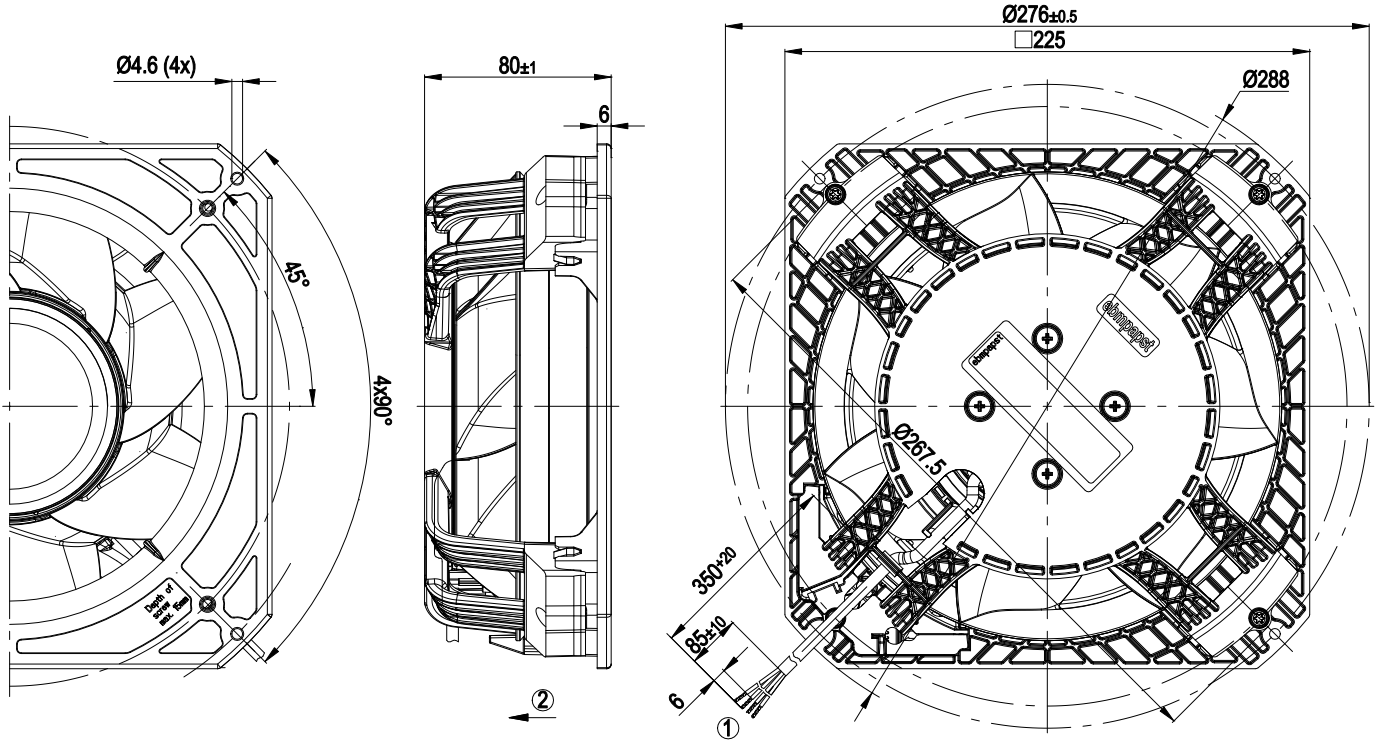

- |   |                                                   |
|---|---------------------------------------------------|
| 1 | Connection line AWG20, 4x brass lead tips crimped |
| 2 | Direction of air flow "V"                         |




# EC diagonal module

single inlet  
with support bracket


## Connection screen

### Customer circuit

Full speed




Adjustable speed




10 V → n = max  
1 V → n = min  
<1 V → n = 0  
Safe start at  
Unom -30%  
from 4 V Ucontr.

Speed adjustable via potentiometer




Speed adjustable via PWM 1-10 kHz



100% PWM → n = max  
10% PWM → n = min  
<10% PWM → n = 0  
Safe start at  
Unom -30%  
from 40% PWM


Preset target value via temperature controller



T < 10 °C → n = 0  
T > 45 °C → n = max

### Connection


### Fan/Motor

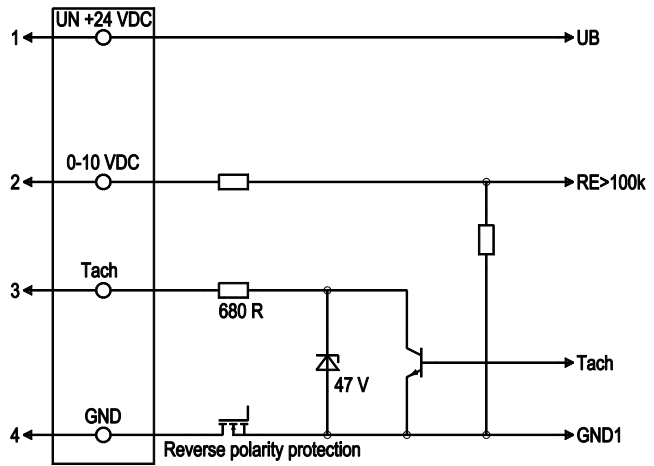

No.	Conn.	Designation	Colour	Function / assignment
1	1	Un +24 VDC	red	Power supply 24 VDC, residual ripple 3.5 %
1	2	0-10 VDC	yellow	Control input Re > 100 K
1	3	Tach	white	Speed monitoring output, 3 pulses per revolution, Isink max = 10 mA
1	4	GND	blue	Reference mass



## Charts: Air flow

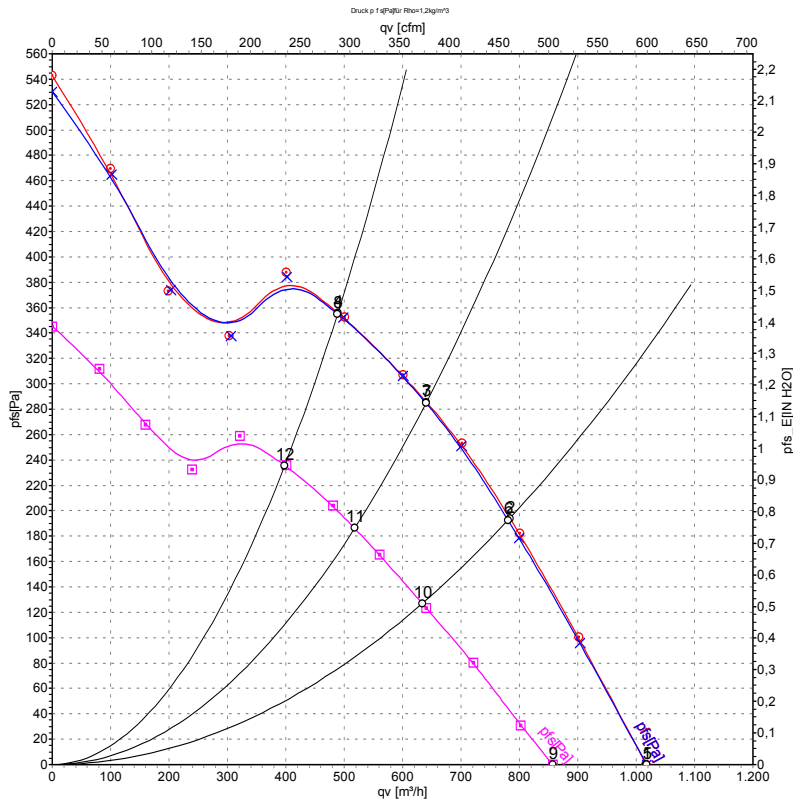

Measurement: LU-127839  
Measurement: LU-127837  
Measurement: LU-127838

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

	U	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	qv	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa
1	28	3400	95	4.55	68	76	1015	0
2	28	3410	116	5.29	66	74	785	195
3	28	3405	120	5.41	66	74	640	286
4	28	3410	116	5.28	68	76	490	355
5	24	3400	95	4.70	68	76	1020	0
6	24	3410	116	5.61	66	74	780	193
7	24	3410	119	5.75	66	74	640	285
8	24	3410	117	5.62	68	76	490	355
9	16	2880	60	4.19	64	72	855	0
10	16	2785	64	4.46	62	70	635	127
11	16	2765	64	4.49	62	70	520	186
12	16	2780	64	4.43	63	71	400	237

U = Supply voltage · n = Speed · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase

