

K2E200-AD08-02

AC diagonal module

single inlet
with housing



K2E200-AD08-02 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Limited partnership · Headquarters Muldingen
County court Stuttgart · HRA 590344

General partner Elektrobau Muldingen GmbH · Headquarters Muldingen
County court Stuttgart · HRB 590142

Nominal data

Type	K2E200-AD08-02			
Motor	M2E068-CF			
Phase		1~	1~	1~
Nominal voltage	VAC	115	115	115
Frequency	Hz	50	60	60
Type of data definition		fa	fa	fa
Valid for approval / standard		CE	CE	UL 1004-3
Speed (rpm)	min ⁻¹	2750	3200	3200
Power input	W	75	90	95
Current draw	A	0.8	0.8	0.85
Motor capacitor	µF	7	7	7
Capacitor voltage	VDB	220	220	220
Capacitor standard		S0 (CE)	S0 (CE)	S0 (CE)
Max. back pressure	Pa	160	210	210
Min. ambient temperature	°C	-25	-25	-25
Max. ambient temperature	°C	55	85	85
Starting current	A	1.72	1.7	1.7

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit
Subject to alterations



Technical features


Mass	2.6 kg
Size	200 mm
Surface of rotor	Coated in black
Material of terminal box	PA plastic
Material of impeller	PA plastic
Housing material	PP plastic
Number of blades	7
Direction of rotation	Clockwise, seen on rotor
Type of protection	IP 44; Depending on installation and position as per EN 60034-5
Insulation class	"F"
Humidity (F)/environmental protection class (H)	H0+
Max. permissible ambient motor temp. (transp./ storage)	+ 80 °C
Min. permissible ambient motor temp. (transp./storage)	- 40 °C
Mounting position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensate discharge holes	None
Operation mode	S1
Motor bearing	Ball bearing
Touch current acc. IEC 60990 (measuring network Fig. 4, TN system)	< 0.75 mA
Motor protection	Thermal overload protector (TOP) wired internally
Protection class	I (if protective earth is connected by customer)
Motor capacitor according to EN 60252-1 in safety protection class	S0
Product conforming to standard	EN 60335-1; CE
Approval	UL 1004-3; CSA C22.2 No.77



AC diagonal module

single inlet
with housing

Product drawing

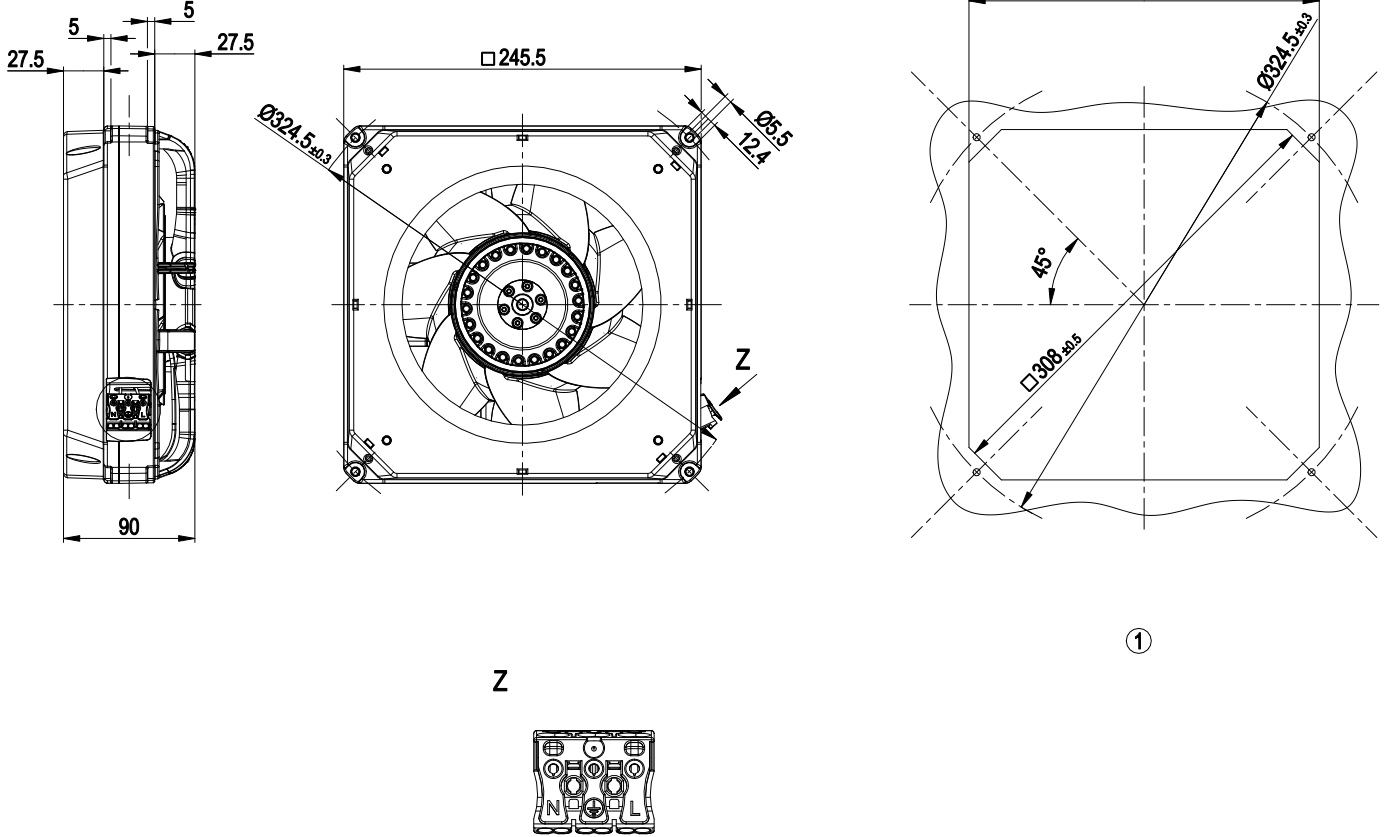


1 Mounting dimensions



AC diagonal module

single inlet
with housing

Accessory part

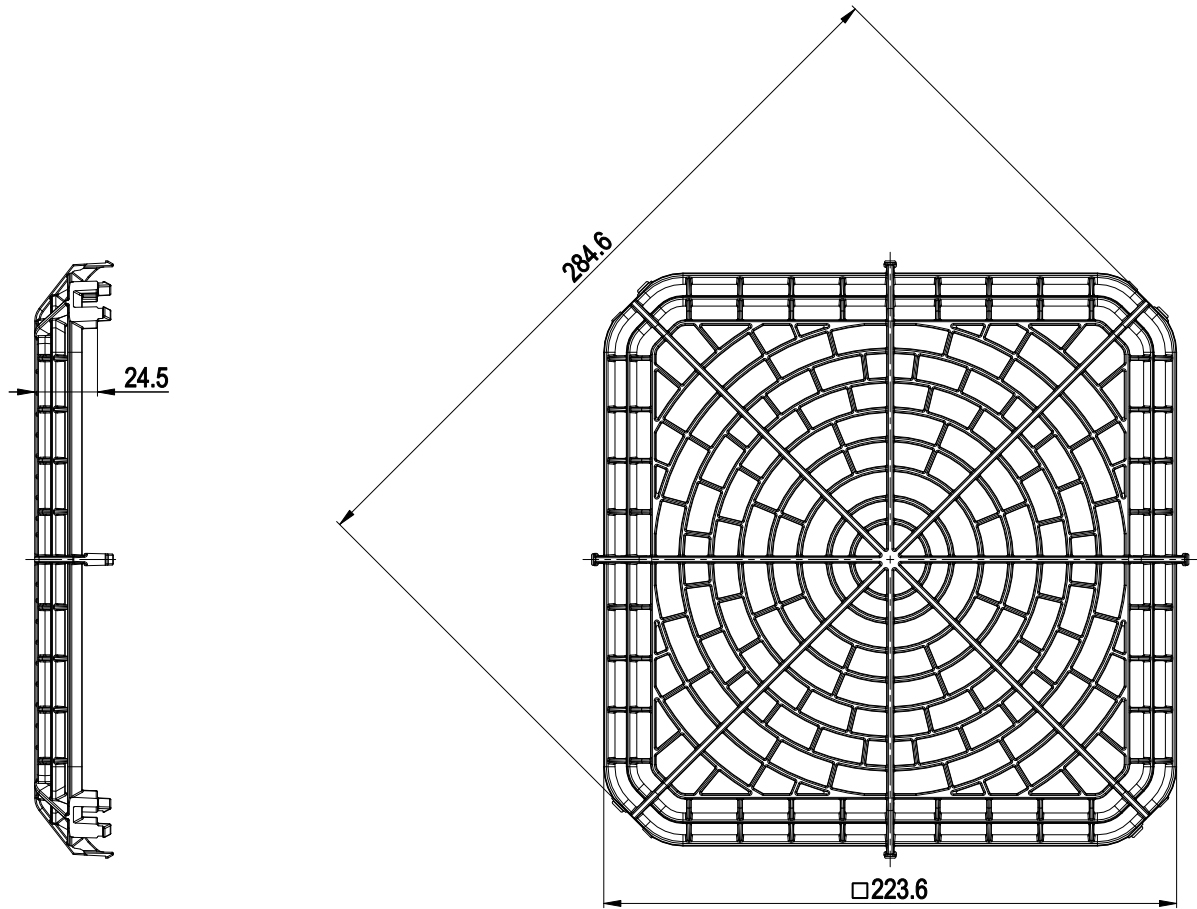


Accessory part: Guard grille 25000-2-2929 outlet side, not included in scope of delivery



K2E200-AD08-02


AC diagonal module

single inlet
with housing

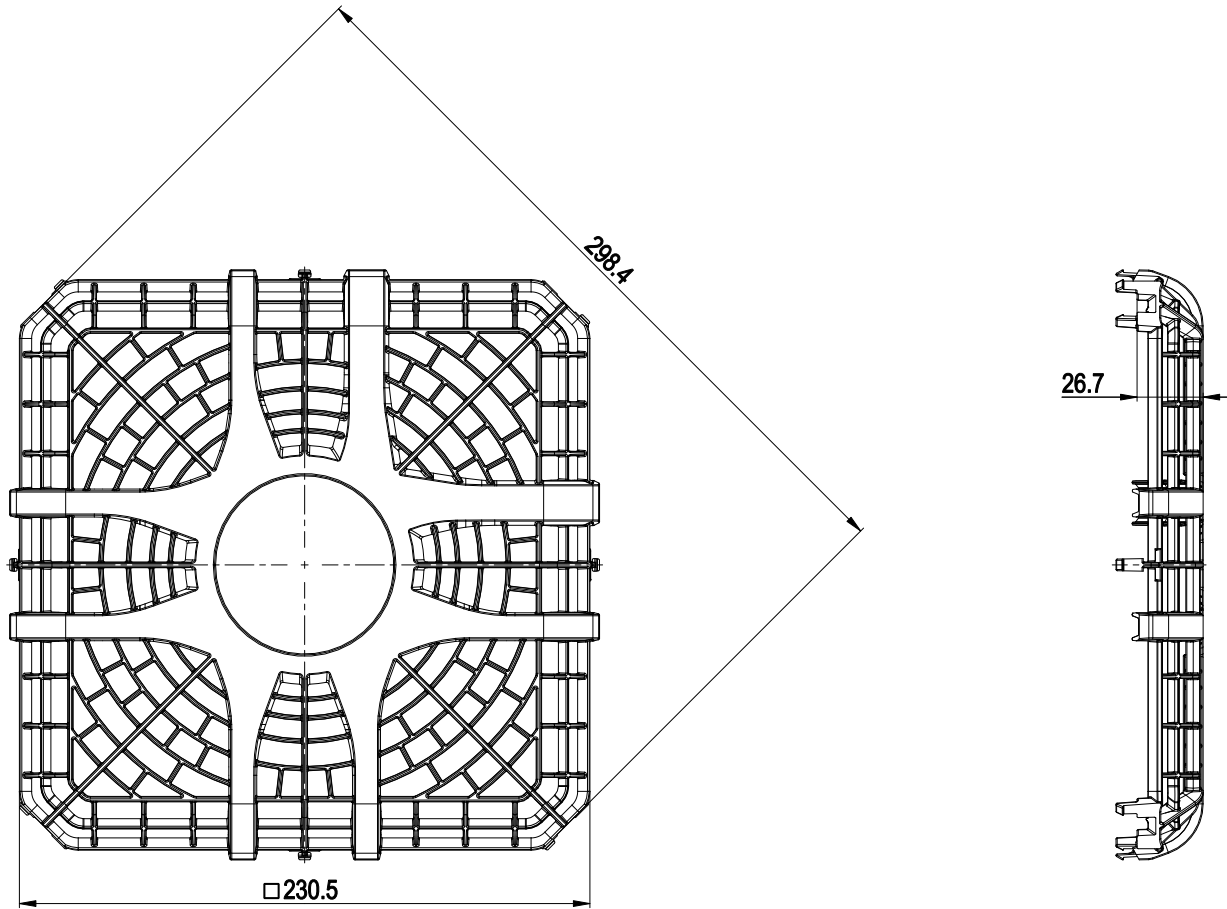

Accessory part: Guard grille 25001-2-2929 intake side, not included in scope of delivery

Connection screen




L	black	N	blue	PE	green / yellow
---	-------	---	------	----	----------------



AC diagonal module

single inlet
with housing

Charts: Air flow 50 Hz

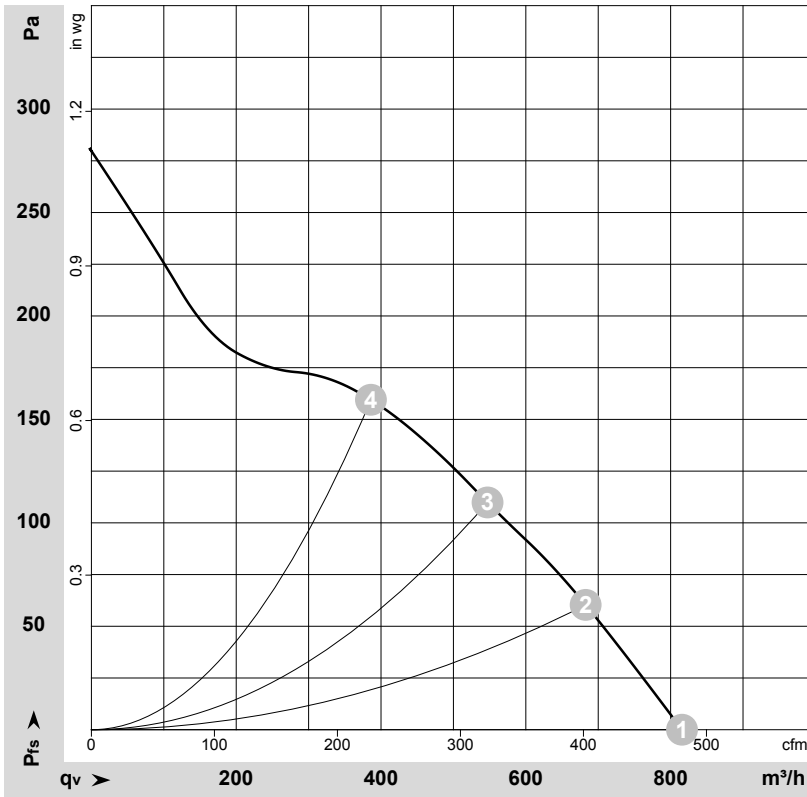

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-174954-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.


Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	115	50	2750	75	0.80	61	69	815	0	480	0.00
2	115	50	2730	77	0.80	60	68	685	60	400	0.24
3	115	50	2710	79	0.80	59	66	545	110	320	0.44
4	115	50	2715	78	0.79	58	66	385	160	225	0.64

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
p_{fs} = Pressure increase



Charts: Air flow 60 Hz

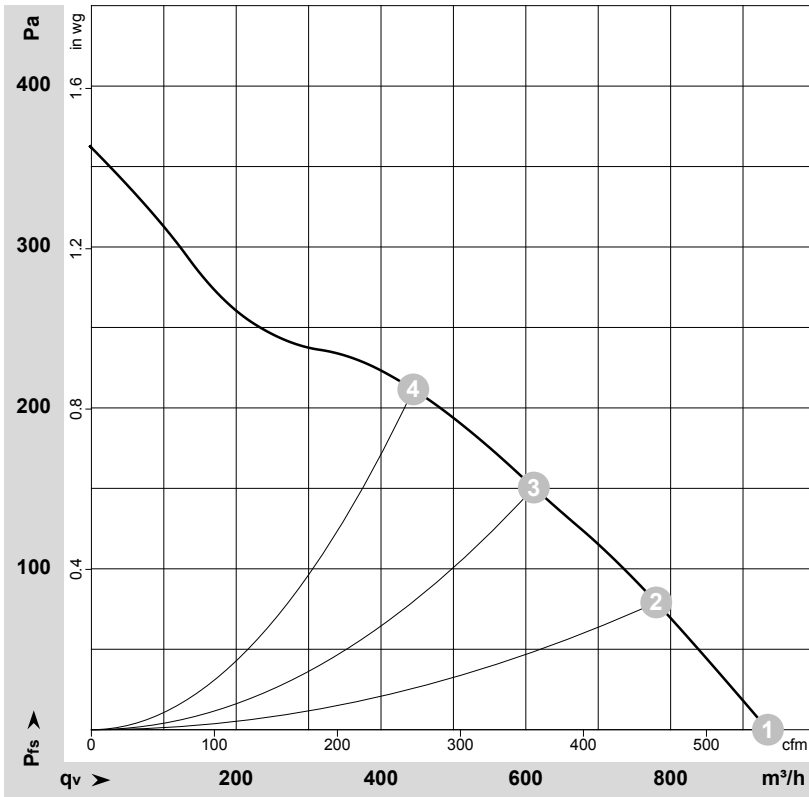

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-175377-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebmpapst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

Measured values

	U	f	n	P _e	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	inH ₂ O
1	115	60	3200	90	0.80	64	72	935	0	550	0.00
2	115	60	3120	95	0.83	63	71	780	80	460	0.32
3	115	60	3080	99	0.87	61	69	610	150	360	0.60
4	115	60	3095	97	0.85	61	69	445	210	260	0.84

U = Supply voltage · f = Frequency · n = Speed (rpm) · P_e = Power input · I = Current draw · LpA_{in} = Sound pressure level inlet side · LwA_{in} = Sound power level inlet side · q_v = Air flow
P_{fs} = Pressure increase

