

## Nominal data

|                             |                    |         |         |         |
|-----------------------------|--------------------|---------|---------|---------|
| Type                        | K2E220-RB86-11     |         |         |         |
| Motor                       | M2E068-CF          |         |         |         |
| Phase                       |                    | 1~      | 1~      | 1~      |
| Nominal voltage             | VAC                | 115     | 115     | 115     |
| Frequency                   | Hz                 | 50      | 60      | 60      |
| Method of obtaining data    |                    | ml      | ml      | ml      |
| Valid for approval/standard |                    | CE      | UL 2111 | CE      |
| Speed (rpm)                 | min <sup>-1</sup>  | 2480    | 2600    | 2600    |
| Power consumption           | W                  | 105     | 150     | 140     |
| Current draw                | A                  | 0.93    | 1.26    | 1.23    |
| Capacitor                   | μF                 | 10      | 10      | 10      |
| Capacitor voltage           | VDB                | 250     | 250     | 250     |
| Capacitor standard          |                    | S0 (CE) | UL      | S0 (CE) |
| Min. back pressure          | Pa                 | 0       | 0       | 0       |
| Min. back pressure          | inH <sub>2</sub> O | 0       | 0       | 0       |
| Min. ambient temperature    | °C                 | -25     | -25     | -25     |
| Max. ambient temperature    | °C                 | 80      | 80      | 80      |
| Starting current            | A                  | 1.62    | 1.72    | 1.63    |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

# AC centrifugal module - RadiCal


backward-curved, single-intake  
with housing

## Technical description

|                                                                            |                                                              |
|----------------------------------------------------------------------------|--------------------------------------------------------------|
| Weight                                                                     | 2.46 kg                                                      |
| Fan size                                                                   | 220 mm                                                       |
| Rotor surface                                                              | Painted black                                                |
| Impeller material                                                          | PA plastic                                                   |
| Housing material                                                           | PA plastic                                                   |
| Guard grille material                                                      | PA plastic                                                   |
| Number of blades                                                           | 7                                                            |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                               |
| Degree of protection                                                       | IP44; installation- and position-dependent as per EN 60034-5 |
| Insulation class                                                           | "F"                                                          |
| Moisture (F) / Environmental (H) protection class                          | H0+                                                          |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                      |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                      |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes                                                | On rotor side                                                |
| Mode                                                                       | S1                                                           |
| Motor bearing                                                              | Ball bearing                                                 |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                    |
| Electrical hookup                                                          | With plug                                                    |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected        |
| With cable                                                                 | Variable                                                     |
| Protection class                                                           | I (with customer connection of protective earth)             |
| Conformity with standards                                                  | EN 60335-1; CE                                               |
| Approval                                                                   | UL 2111; CSA C22.2 No. 77                                    |



## Product drawing

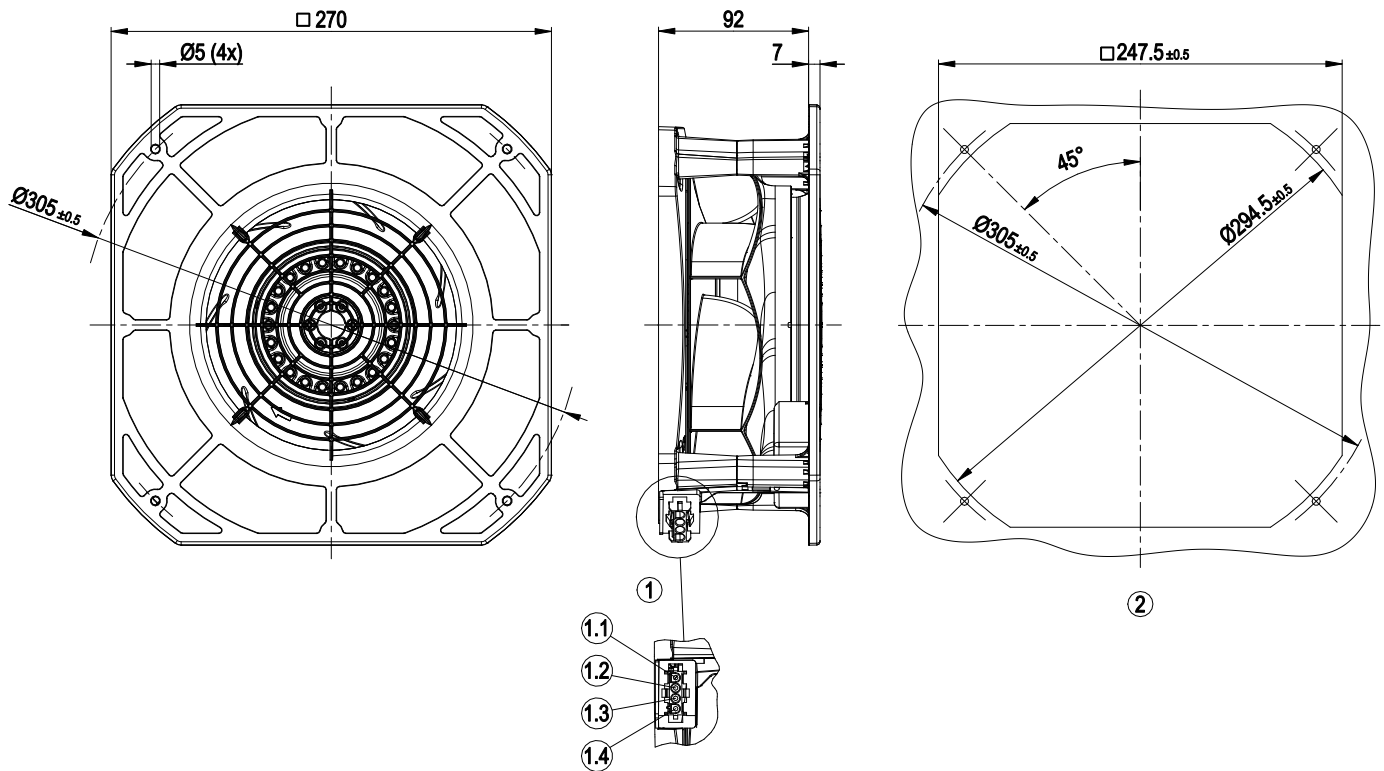


|     |                                                       |
|-----|-------------------------------------------------------|
| 1   | tyco coded plug system                                |
|     | 4-pole connector housing tyco 926305-7                |
|     | 4x plug pin tyco 926 885-1                            |
|     | Mating connector (not included in scope of delivery): |
|     | 4-pole connector housing tyco 926298-6                |
|     | 4x socket Tyco 926 884-1                              |
| 1.1 | PE                                                    |
| 1.2 | L                                                     |
| 1.3 | N + capacitor                                         |
| 1.4 | Capacitor                                             |
|     | (capacitor not included in scope of delivery)         |
| 2   | Mounting dimensions                                   |

# AC centrifugal module - RadiCal

backward-curved, single-intake  
with housing


## Connection diagram



|    |              |   |       |    |       |
|----|--------------|---|-------|----|-------|
| U1 | blue         | Z | brown | U2 | black |
| PE | green/yellow |   |       |    |       |



Curves: Air performance 50 Hz

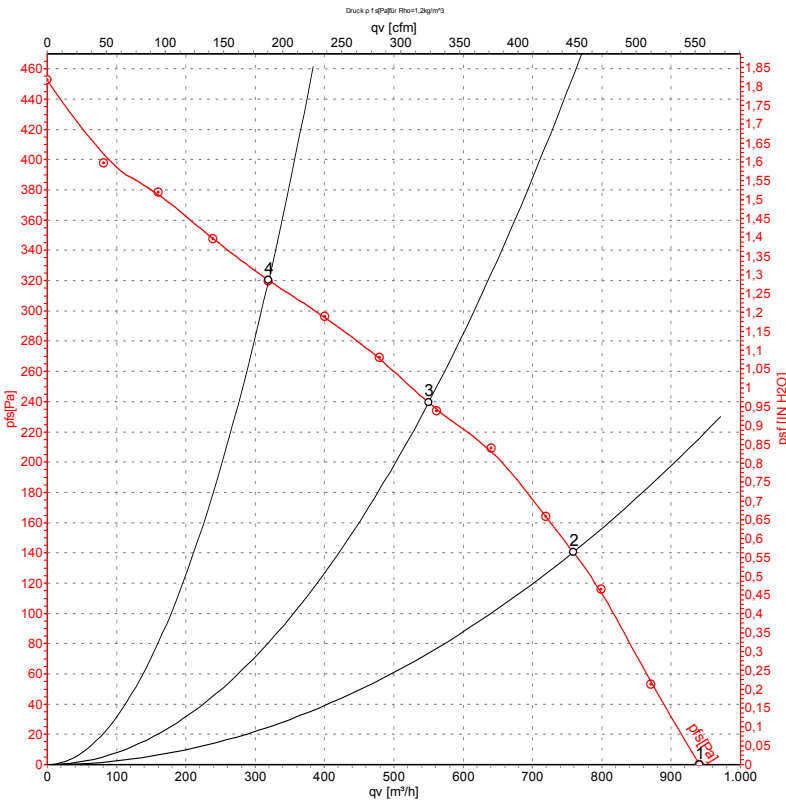

Measurement: LU-137611-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.


Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub>    | p <sub>1s</sub> | q <sub>v</sub> | p <sub>1s</sub>    |
|---|-----|----|-------------------|----------------|------|-------------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 115 | 50 | 2600              | 92             | 0.82 | 940               | 0               | 555            | 0.00               |
| 2 | 115 | 50 | 2530              | 99             | 0.88 | 760               | 140             | 445            | 0.56               |
| 3 | 115 | 50 | 2480              | 105            | 0.93 | 550               | 240             | 325            | 0.96               |
| 4 | 115 | 50 | 2535              | 99             | 0.87 | 320               | 320             | 190            | 1.28               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>1s</sub> = Pressure increase



## Curves: Air performance 60 Hz

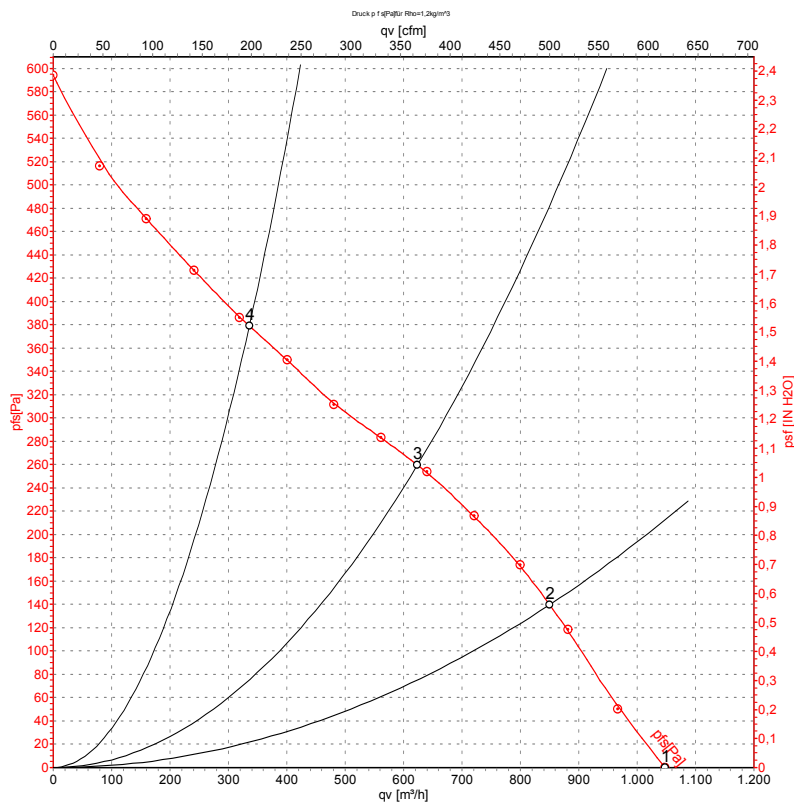

Measurement: LU-137606-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | U   | f  | n                 | P <sub>e</sub> | I    | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub>    |
|---|-----|----|-------------------|----------------|------|----------------|-----------------|----------------|--------------------|
|   | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h           | Pa              | cfm            | inH <sub>2</sub> O |
| 1 | 115 | 60 | 2885              | 129            | 1.12 | 1050           | 0               | 615            | 0.00               |
| 2 | 115 | 60 | 2740              | 135            | 1.17 | 850            | 140             | 500            | 0.56               |
| 3 | 115 | 60 | 2600              | 140            | 1.23 | 625            | 260             | 365            | 1.04               |
| 4 | 115 | 60 | 2745              | 133            | 1.16 | 335            | 380             | 200            | 1.53               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

