

EC centrifugal fan combination

forward-curved, dual-intake
with housing, for rail applications

K3G097-AS82-83 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	K3G097-AS82-83	
Motor	M3G084-BF	
Nominal voltage	VDC	26
Nominal voltage range	VDC	16 .. 32
Frequency	Hz	DC
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	4680
Power consumption	W	740
Current draw	A	28
Min. back pressure	Pa	0
Min. back pressure	in. wg	0
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	70

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	45.4	35.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		54.2	44
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_e	kW	0.4
09 Air flow q_v	m³/h	725
09 Pressure increase p_{fs}	Pa	817
10 Speed (rpm) n	min ⁻¹	5510
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-175168



EC centrifugal fan combination

forward-curved, dual-intake

with housing, for rail applications

Technical description

Weight	2.3 kg
Size	97 mm
Motor size	84
Impeller material	PA plastic
Housing material	PA plastic
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP24 KM, electronics IP6K9K (mating connector installed)
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H3
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing; (sealed)
Life expectancy	40,000 h (typical)
EMC regulations	According to EN 50121-3-2
Electrical hookup	Standby current less than 500 µA
Protection class	III
Conformity with standards	EN 45545-2, HL3: 2013 + A1:2015; EN 50155: 2008; EN 61373, Cat. 1B: 2010; CE
Approval	EAC




EC centrifugal fan combination

forward-curved, dual-intake

with housing, for rail applications

Product drawing

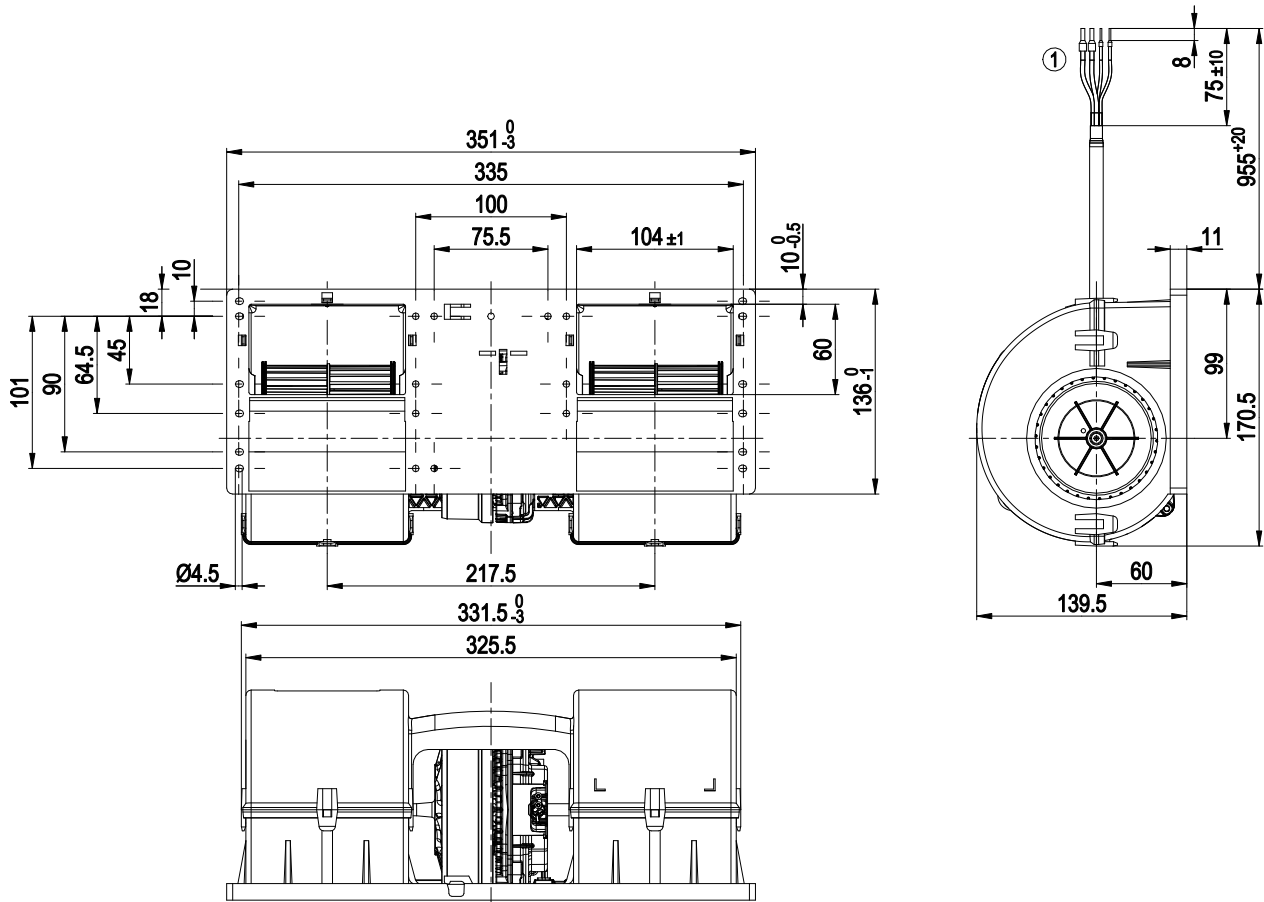


- | | |
|---|--|
| 1 | Cable, halogen-free, railway application EN 45545, 2x 6.0 mm ² , 2x 1.0 mm ² |
| | 4x wire-end ferrule |

EC centrifugal fan combination

forward-curved, dual-intake

with housing, for rail applications

Connection diagram

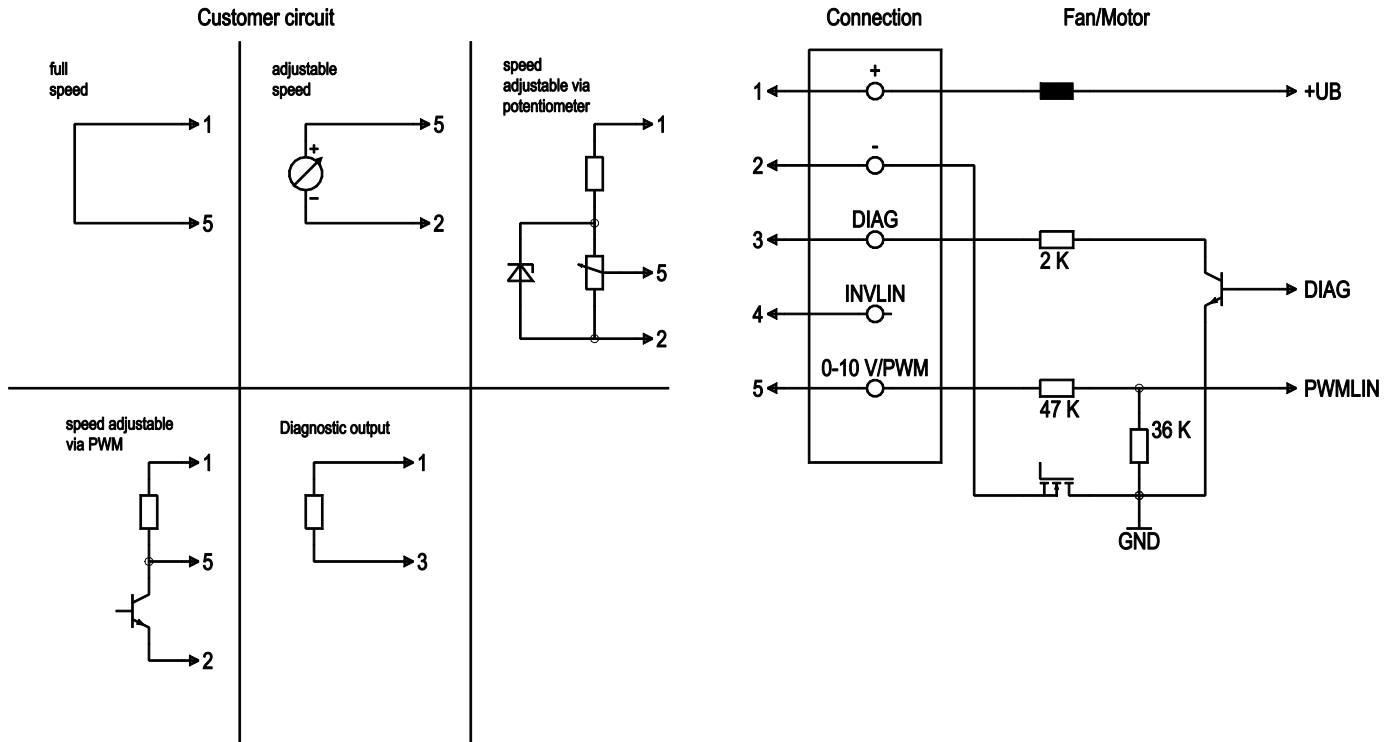


No.	Conn.	Designation	Color	Function/assignment
	1	+	black	Power supply, see nameplate for voltage range
	2	-	brown	Power supply, see nameplate for voltage range
	3	DIAG	white	Diagnostic output: Open collector, Isink max = 10 mA, Ri > 50 Ω Fan OK -> High; Fan Error -> Low
	4	INVLIN		not used
	5	0-10 V / PWM	yellow	Control input: Ri > 47 kΩ 0-10 V (typ. < 1 V -> n=0; 1.5 V -> n=min; > 10 V -> n=max) PWM (amplitude 10 V; 1-50 kHz; typ. < 5 % -> n=0; 15% -> n=min; > 100% -> n=max)

EC centrifugal fan combination

forward-curved, dual-intake
with housing, for rail applications

Curves: Air performance

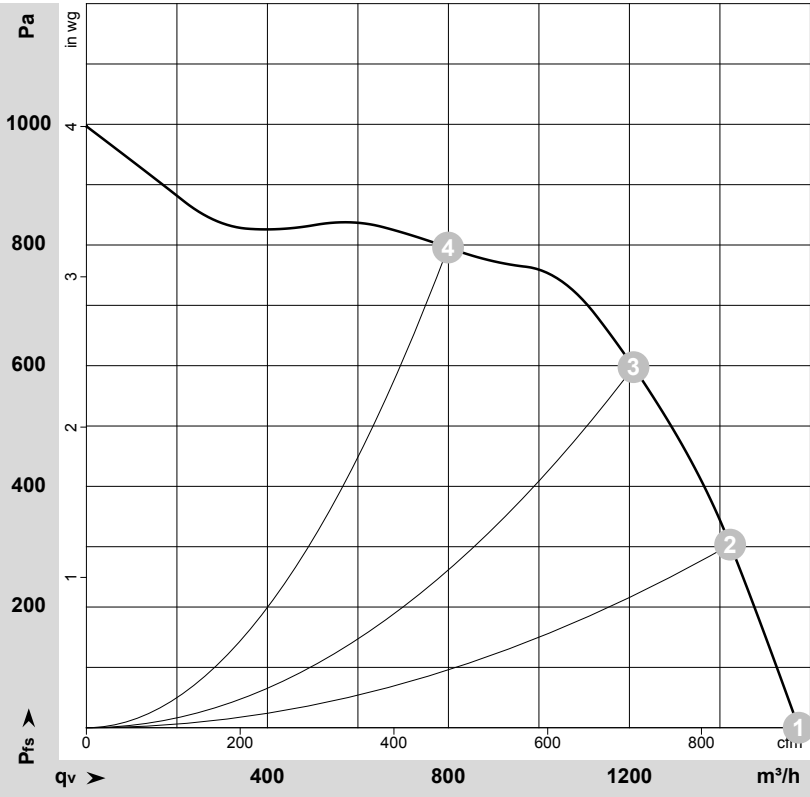

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-175168-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	P _{fs}	q _v	P _{fs}
	V	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	26	4680	740	28.00	78	88	1575	0	925	0.00
2	26	5025	740	28.00	76	87	1425	300	840	1.20
3	26	5380	659	25.31	75	85	1210	600	710	2.41
4	26	5500	441	16.92	73	84	800	800	470	3.21

U = Voltage · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
P_{fs} = Pressure increase

