

K3G146-AC15-08

EC centrifugal fan combination

forward-curved
with housing



K3G146-AC15-08 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	K3G146-AC15-08	
Motor	M3G055-DF	
Phase		1~
Nominal voltage	VAC	230
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	910
Power consumption	W	60
Current draw	A	0.5
Min. back pressure	Pa	25
Min. back pressure	inH ₂ O	0.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change



Technical description


Weight	3.4 kg
Fan size	146 mm
Rotor surface	Galvanized
Electronics housing material	PP plastic
Impeller material	PA plastic
Housing material	PP plastic
Motor suspension	Motor vibration-damped on both sides
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	Motor IP44, electronics IP20; installation- and position-dependent
Insulation class	"F"
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Any
Condensation drainage holes	None, open rotor
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 1.1 mA - Fault output (open collector) - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from supply - Thermal overload protection for motor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60335-1

EC centrifugal fan combination

forward-curved


with housing

Product drawing

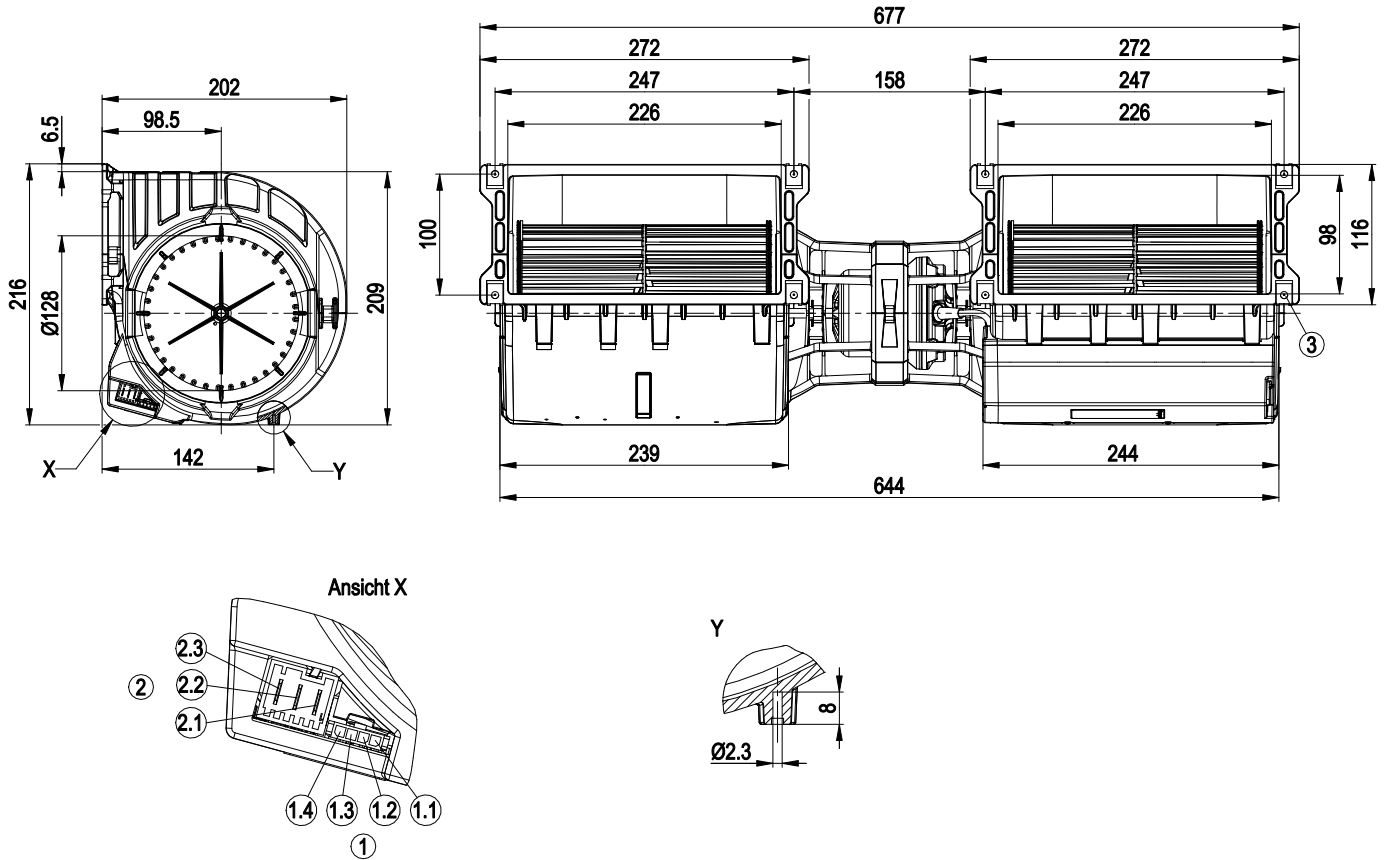


1	Header Molex Micro Fit 3.0 04365 00400 (pluggable with 04364 50400)
1.1	10 V
1.2	FG/FB
1.3	0-10 V lin. / PWM
1.4	GND
2	Connector Lumberg 3642 03 K01 (pluggable with 3626 03 K01)
2.1	PE
2.2	L
2.3	N
3	8x sheet metal nut for thread EN ISO 1478-ST4.8 (min. screw length 14.5 mm plus material thickness of attachment)

Connection diagram

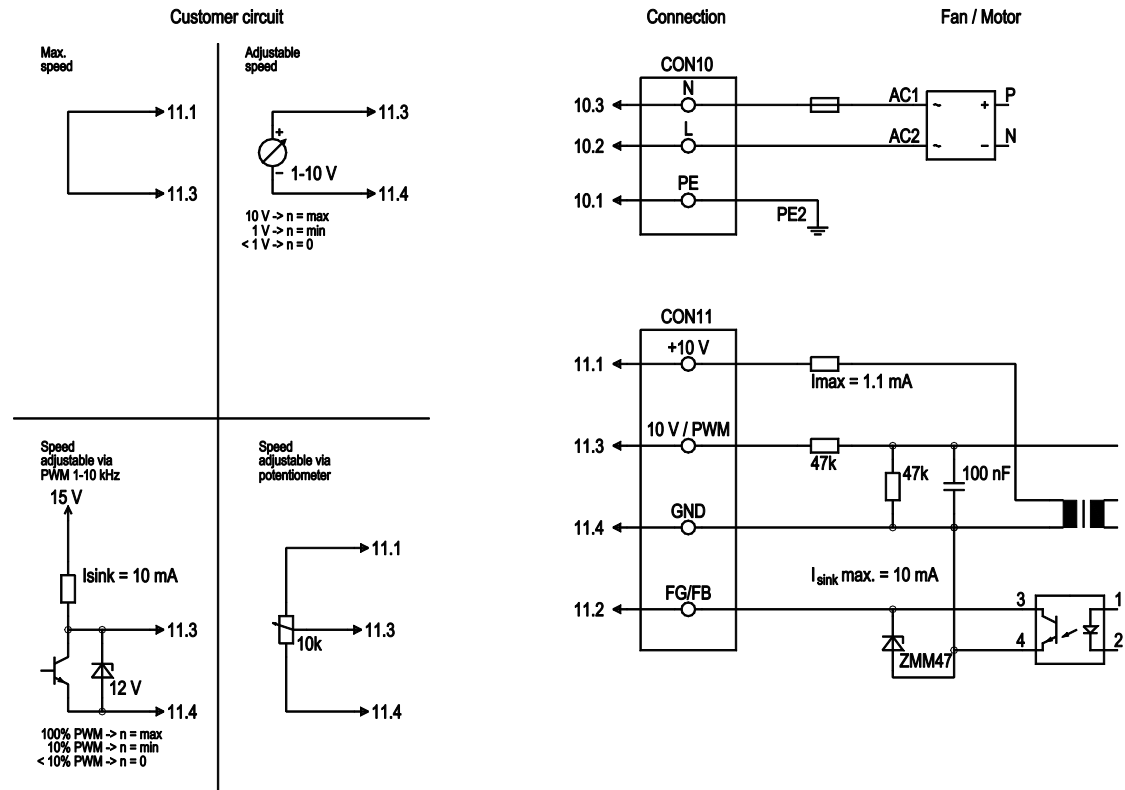

No.	Conn.	Designation	Color	Function/assignment
CON10	10.1	PE	green/yellow	Protective earth
CON10	10.2	L	black	Power supply 230 VAC, 50-60 Hz, see nameplate for voltage range
CON10	10.3	N	blue	Neutral conductor
CON11	11.1	10 V/max. 1.1 mA	red	Voltage output 10 V, 1.1 mA, electrically isolated, not short-circuit-proof
CON11	11.2	FG/FB	white	Fan good / fan bad: open collector, fan good = high, electrically isolated, $I_{sink \text{ max}} = 10 \text{ mA}$
CON11	11.3	0-10 V PWM	yellow	Control input 0-10 V or PWM, electrically isolated
CON11	11.4	GND	blue	GND connection for control interface

Curves: Air performance 50 Hz

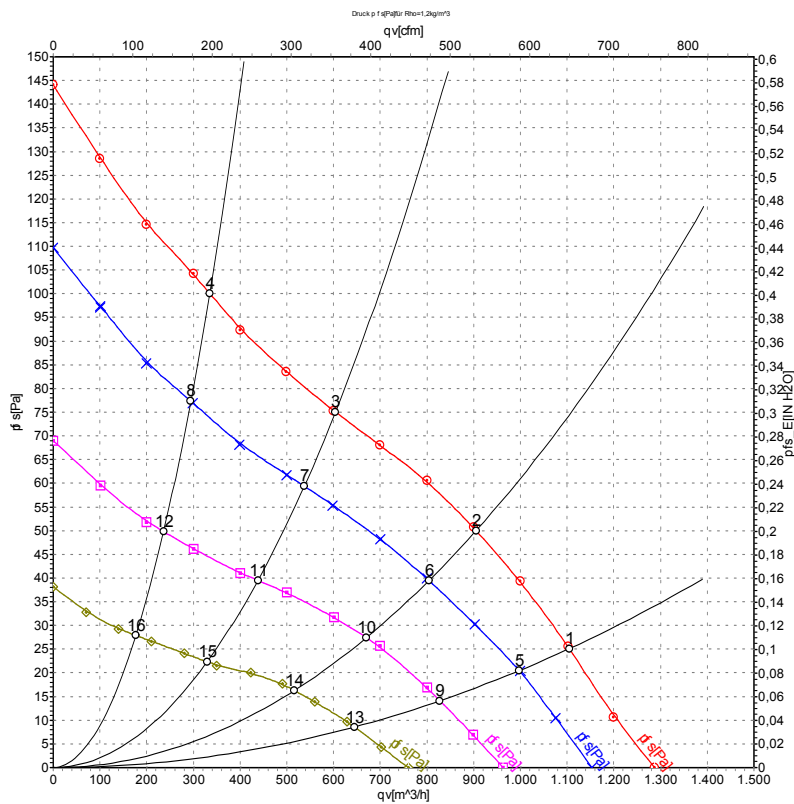

Measurement: LU-132605-1
 Measurement: LU-132537-1
 Measurement: LU-132538-1
 Measurement: LU-132540-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	qv	p _{fs}	qv	p _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m³/h	Pa	CFM	inH ₂ O
1	230	50	910	60	0.50	44	57	1105	25	650	0.10
2	230	50	1025	53	0.45	43	56	905	50	535	0.20
3	230	50	1160	42	0.37	44	56	605	75	355	0.30
4	230	50	1320	32	0.28	46	58	335	100	195	0.40
5	230	50	825	44	0.40			995	21	585	0.08
6	230	50	910	38	0.35			805	40	475	0.16
7	230	50	1030	30	0.28			535	59	315	0.24
8	230	50	1160	23	0.22			295	77	175	0.31
9	230	50	695	25	0.24			830	14	485	0.06
10	230	50	755	22	0.20			670	28	395	0.11
11	230	50	845	17	0.16			440	40	260	0.16
12	230	50	935	13	0.13			235	50	140	0.20
13	230	50	545	13	0.12			645	9	380	0.04
14	230	50	590	11	0.11			515	16	305	0.06
15	230	50	645	8.8	0.09			330	22	195	0.09
16	230	50	705	6.7	0.08			175	28	105	0.11

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 qv = Air flow · p_{fs} = Pressure increase