

K3G200-BD44-02 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	K3G200-BD44-02	
Motor	M3G074-CF	
Nominal voltage	VDC	24
Nominal voltage range	VDC	16 .. 28
Method of obtaining data		fa
Status		prelim.
Speed (rpm)	min <sup>-1</sup>	4830
Power consumption	W	275
Current draw	A	11.5
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	48	34	09 Power consumption $P_e$	kW	0.29
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	805
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	572
04 Efficiency grade N		64	50	10 Speed (rpm) n	min <sup>-1</sup>	4690
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

\* Specific ratio =  $1 + p_s / 100\,000\text{ Pa}$

LU-154760

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).




### Technical description

Weight	2.24 kg
Size	200 mm
Motor size	74
Rotor surface	Painted black
Impeller material	PA plastic
Housing material	PA plastic
Support bracket material	PA plastic
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20; installation- and position-dependent
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1+
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Any
Condensation drainage holes	None
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> <li>- Tach output</li> <li>- Motor current limitation</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Overvoltage detection</li> <li>- Reverse polarity protection</li> </ul>
With cable	Lateral
Protection class assignment	<p>III; Requires supply with safety extra-low voltage SELV.</p> <p>This component for installation may have several local protection classes. This information relates to this component's basic design.</p> <p>The final protection class is based on the component's intended installation and connection.</p>
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Approval	EAC

# EC diagonal module

backward-curved, single-intake  
with support bracket

## Product drawing

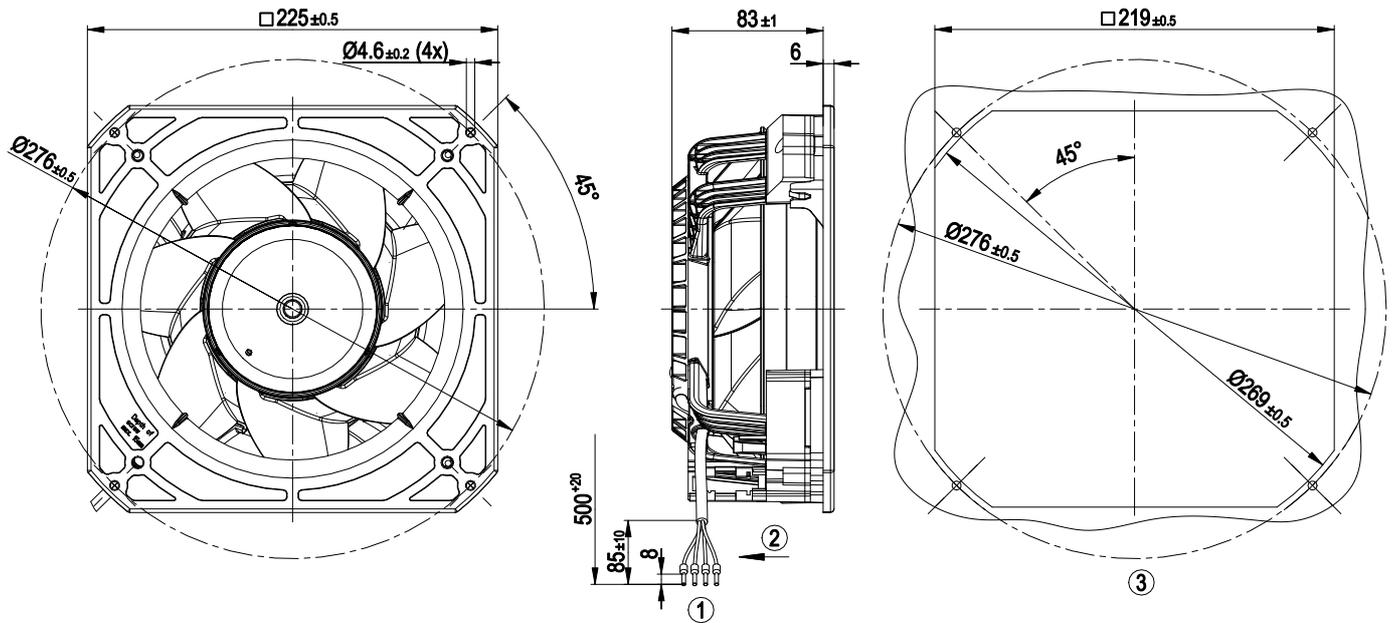


1	Cable PVC AWG16, 4x crimped ferrules
2	Direction of air flow "V"
3	Mounting dimensions

# EC diagonal module

backward-curved, single-intake  
with support bracket


## Connection diagram

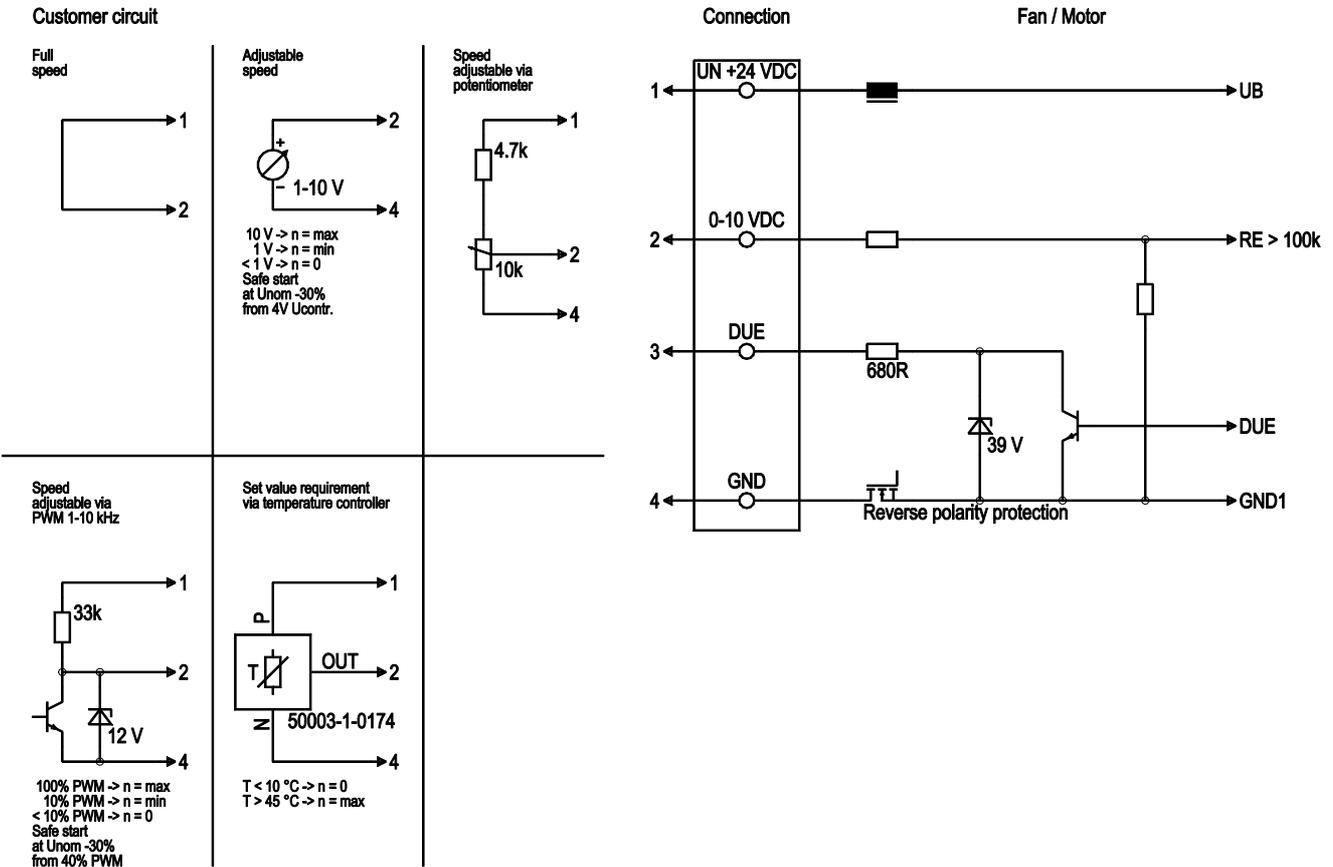

No.	Conn.	Designation	Color	Function/assignment
	1	Un +24 VDC	red	Power supply 24 VDC, maximum ripple 3.5%
	2	0-10 VDC	yellow	Control input Re > 100k
	3	Tach	white	Tach output, 3 pulses per revolution, Isink max = 10 mA
	4	GND	blue	Reference ground



## Curves: Air performance

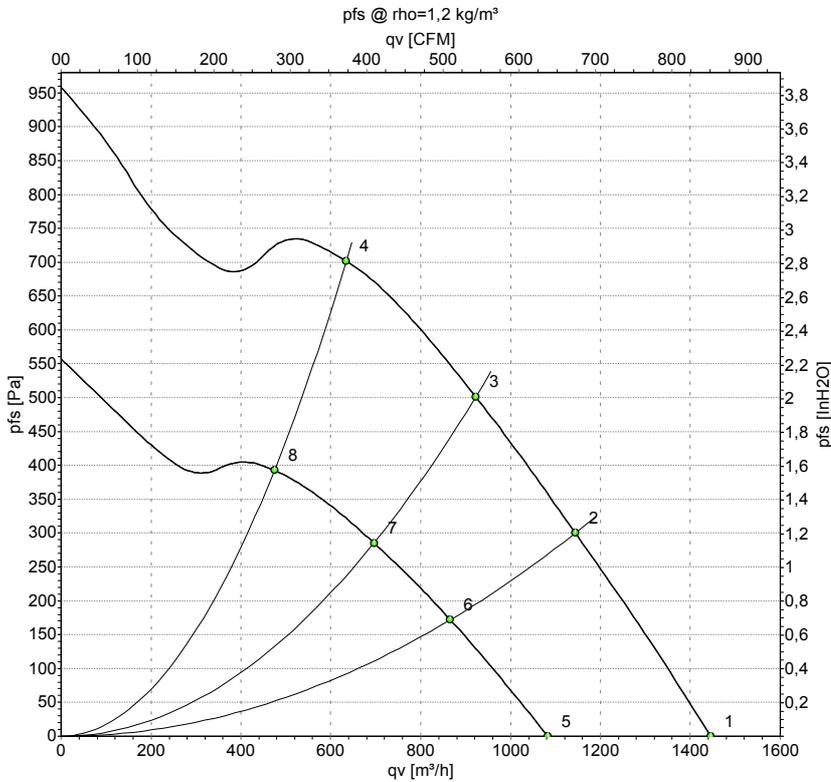

Measurement: LU-154760-1  
Measurement: LU-154763-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	p <sub>fs</sub>	q <sub>v</sub>	p <sub>fs</sub>
	V	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	24-28	4830	275	11.50*	77	84	1445	0	850	0.00
2	24-28	4720	294	12.24*	73	81	1145	300	675	1.20
3	24-28	4685	299	12.48*	73	80	925	500	545	2.01
4	24-28	4715	295	12.30*	75	83	635	700	375	2.81
5	16	3650	118	7.35	70	77	1085	0	635	0.00
6	16	3575	126	7.89	66	74	865	172	510	0.69
7	16	3550	129	8.05	66	73	695	286	410	1.15
8	16	3565	127	7.94	68	76	475	393	280	1.58

U = Voltage · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · \* = Current measured at nominal voltage · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

