

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

K3G250-PR04-H1 ebmpapst Datasheet  
sales@fansco.com  
www.fansco.com

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G250-PR04-H1    |            |
| Motor                    | M3G084-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 277 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 3080       |
| Power consumption        | W                 | 500        |
| Current draw             | A                 | 2.3        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 45         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 67.8   | 48.5      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 81.3   | 62        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 0.51 |
| 09 Air flow $q_v$             | m³/h              | 1800 |
| 09 Pressure increase $p_{fs}$ | Pa                | 635  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 3065 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-174531




## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 7.586 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Size                                                                       | 250 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Motor size                                                                 | 84                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Impeller material                                                          | PP plastic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Support plate material                                                     | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Support bracket material                                                   | Steel, painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Inlet nozzle material                                                      | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Number of blades                                                           | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Degree of protection                                                       | IP55                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Moisture (F) / Environmental (H) protection class                          | H1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Operation and alarm display</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electrical hookup                                                          | Connector with cable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Conformity with standards                                                  | EN 61800-5-1; EN 60335-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Approval                                                                   | CSA C22.2 No. 77 + CAN/CSA-E60730-1; CCC; EAC; UL 1004-7 + 60730-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

# EC centrifugal module - RadiPac


backward-curved, single-intake  
with support bracket

## Product drawing

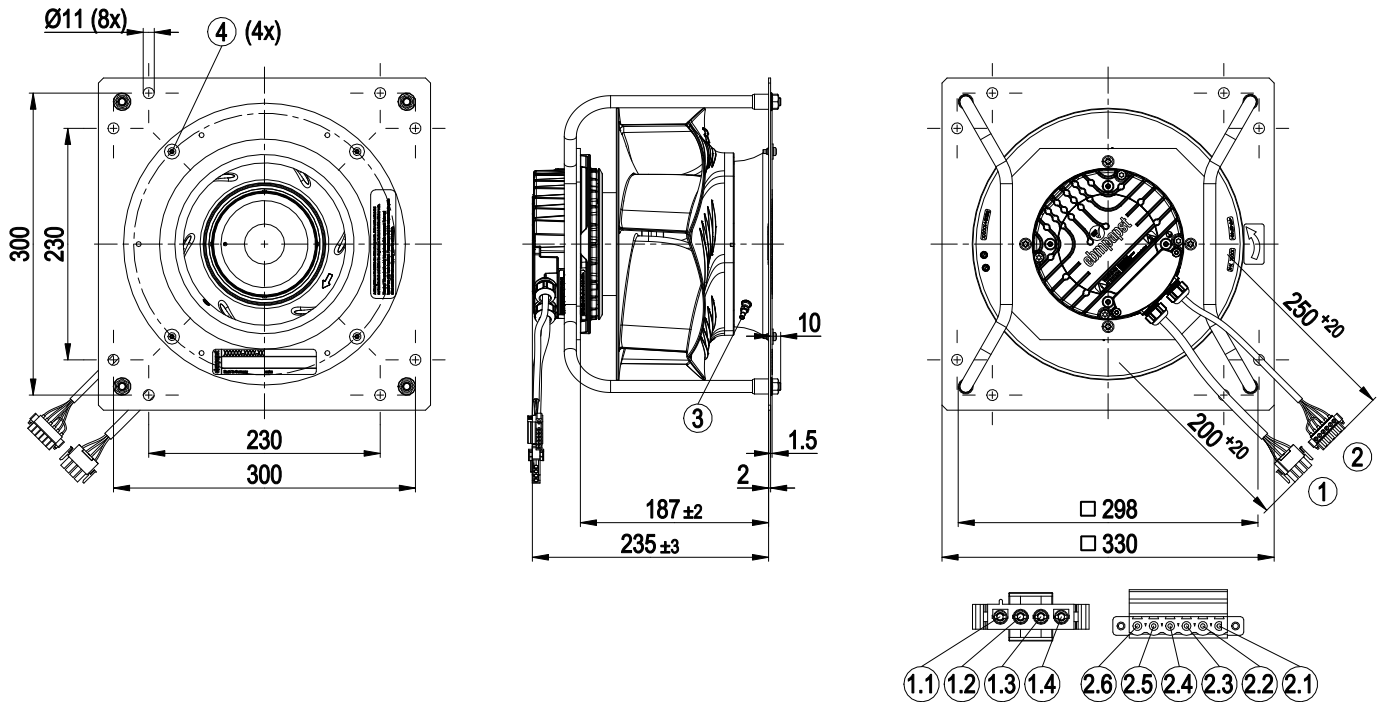


|     |                                                                                          |
|-----|------------------------------------------------------------------------------------------|
| 1   | Cable PVC AWG18                                                                          |
|     | 4-pole connector housing TE 1-480702-0, 2x plug pin TE 926883-1, 1x plug pin TE 350654-1 |
| 1.1 | PE                                                                                       |
| 1.2 | not used                                                                                 |
| 1.3 | L                                                                                        |
| 1.4 | N                                                                                        |
| 2   | Cable PVC AWG22                                                                          |
|     | 6-pole connector housing Phoenix 1778027 (MSTB 2.5/6-STF-5.08), 6x wire-end ferrules     |
| 2.1 | RSA                                                                                      |
| 2.2 | RSB                                                                                      |
| 2.3 | GND                                                                                      |
| 2.4 | 0-10 V                                                                                   |
| 2.5 | +10 V                                                                                    |
| 2.6 | Bridge (GND)                                                                             |
| 3   | Inlet ring with pressure tap (k-factor: 76)                                              |
| 4   | Attachment for inlet ring and FlowGrid                                                   |

## Connection diagram

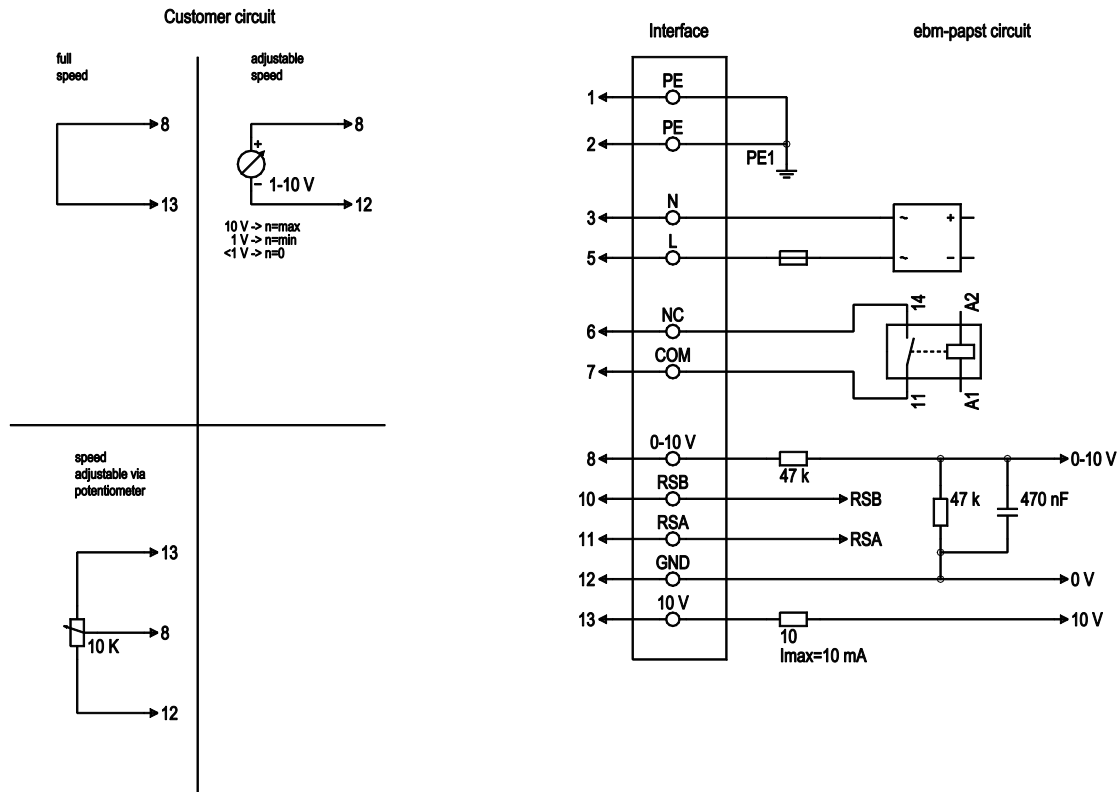

| No. | Conn. | Designation | Function/assignment                                                                                                          |
|-----|-------|-------------|------------------------------------------------------------------------------------------------------------------------------|
| 1   | 1     | PE          | Protective earth                                                                                                             |
| 1   | 2     | PE          | not brought out via wire                                                                                                     |
| 1   | 3     | N           | Supply connection, power supply, neutral conductor, voltage range see nameplate, 50/60 Hz                                    |
| 1   | 5     | L           | Supply connection, power supply, phase, voltage range see nameplate, 50/60 Hz                                                |
| 1   | 6     | NC          | not brought out via wire                                                                                                     |
| 1   | 7     | COM         | not brought out via wire                                                                                                     |
| 2   | 8     | 0-10 V      | Analog input (set value) SELV, 0-10 V, R <sub>i</sub> = 100 kΩ, adjustable curve                                             |
| 2   | 10    | RSB         | RS485 interface for MODBUS, RSB; SELV                                                                                        |
| 2   | 11    | RSA         | RS485 interface for MODBUS, RSA; SELV                                                                                        |
| 2   | 12    | GND         | Reference ground for control interface, SELV                                                                                 |
| 2   | 13    | +10 V       | Fixed voltage output 10 VDC, +10 V ± 3%, max. 10 mA, short-circuit-proof, power supply for external devices (e.g. pot); SELV |

## Curves: Air performance 50 Hz

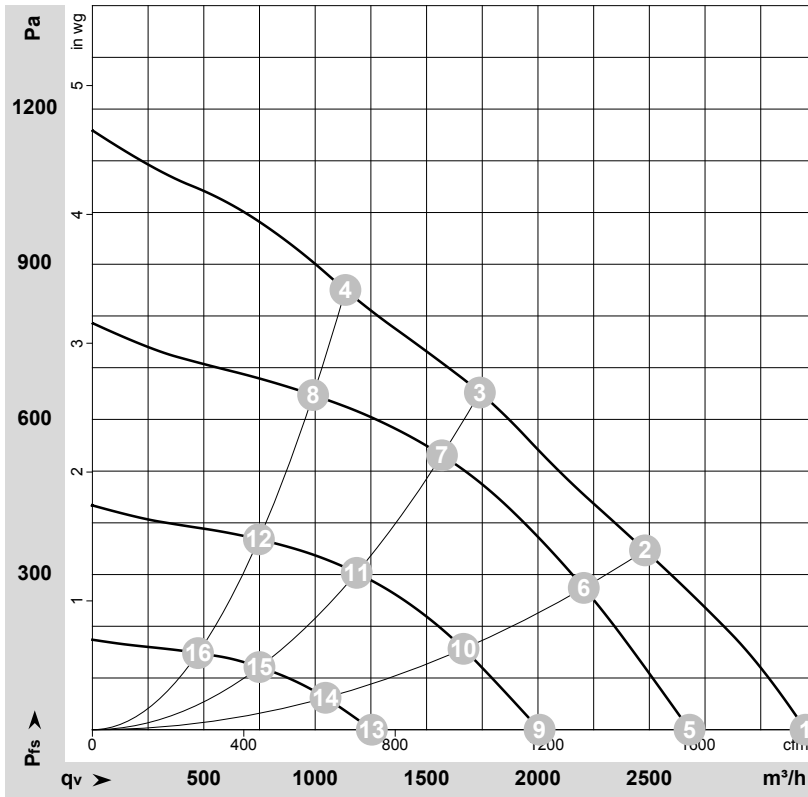

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-174531-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub> | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|----------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m³/h           | Pa              | cfm            | in. wg          |
| 1  | 230 | 50 | 3380              | 494             | 2.16 | 77                | 84                | 3200           | 0               | 1885           | 0.00            |
| 2  | 230 | 50 | 3125              | 500             | 2.30 | 70                | 77                | 2480           | 350             | 1460           | 1.41            |
| 3  | 230 | 50 | 3080              | 500             | 2.30 | 66                | 74                | 1740           | 650             | 1025           | 2.61            |
| 4  | 230 | 50 | 3220              | 500             | 2.30 | 70                | 78                | 1135           | 850             | 670            | 3.41            |
| 5  | 230 | 50 | 2840              | 296             | 1.31 | 73                | 80                | 2680           | 0               | 1575           | 0.00            |
| 6  | 230 | 50 | 2790              | 374             | 1.64 | 67                | 75                | 2205           | 275             | 1300           | 1.10            |
| 7  | 230 | 50 | 2775              | 386             | 1.70 | 64                | 72                | 1570           | 531             | 925            | 2.13            |
| 8  | 230 | 50 | 2805              | 359             | 1.58 | 67                | 74                | 990            | 648             | 585            | 2.60            |
| 9  | 230 | 50 | 2140              | 137             | 0.62 | 66                | 73                | 2005           | 0               | 1180           | 0.00            |
| 10 | 230 | 50 | 2115              | 174             | 0.78 | 60                | 67                | 1665           | 157             | 980            | 0.63            |
| 11 | 230 | 50 | 2105              | 181             | 0.81 | 56                | 63                | 1185           | 304             | 700            | 1.22            |
| 12 | 230 | 50 | 2120              | 164             | 0.74 | 59                | 67                | 745            | 368             | 440            | 1.48            |
| 13 | 230 | 50 | 1355              | 49              | 0.26 | 55                | 63                | 1255           | 0               | 740            | 0.00            |
| 14 | 230 | 50 | 1345              | 57              | 0.29 | 51                | 58                | 1045           | 62              | 615            | 0.25            |
| 15 | 230 | 50 | 1340              | 59              | 0.30 | 45                | 53                | 750            | 121             | 440            | 0.49            |
| 16 | 230 | 50 | 1345              | 55              | 0.29 | 46                | 54                | 475            | 148             | 280            | 0.59            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

