

K3G250-RE07-19 ebmpapst Datasheet  
 sales@fansco.com  
 www.fansco.com

Limited partnership · Headquarters Mulfingen  
 County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
 County court Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G250-RE07-19    |            |
| Motor                    | M3G055-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 240 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 2510       |
| Power input              | W                 | 170        |
| Current draw             | A                 | 1.4        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
 Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |                                |                   |      |
|-----------------------------------|---|--------|--------------|--------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 57.8   | 43.1         | 09 Power input $P_{ed}$        | kW                | 0.16 |
| 02 Measurement category           |   | A      |              | 09 Air flow $q_v$              | m <sup>3</sup> /h | 800  |
| 03 Efficiency category            |   | Static |              | 09 Pressure increase $p_{fs}$  | Pa                | 380  |
| 04 Efficiency grade N             |   | 76.7   | 62           | 10 Speed (rpm) $n$             | min <sup>-1</sup> | 2535 |
| 05 Variable speed drive           |   | Yes    |              | 11 Specific ratio <sup>*</sup> |                   | 1.00 |

Data definition with optimum efficiency.

The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

<sup>\*</sup> Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-153273




### Technical features

|  |   |
|--|---|
| Mass   | 2.8 kg  |
| Size   | 250 mm  |
| Surface of rotor   | Thick layer passivated  |
| Material of impeller   | PA plastic  |
| Housing material   | PA plastic  |
| Number of blades   | 7   |
| Direction of rotation  | Clockwise, seen on rotor  |
| Type of protection   | IP 54   |
| Insulation class   | "B"   |
| Max. permissible ambient motor temp. (transp./ storage)            | + 80 °C   |
| Min. permissible ambient motor temp. (transp./storage)             | - 40 °C   |
| Mounting position  | Any   |
| Condensate discharge holes   | None, open rotor  |
| Operation mode   | S1  |
| Motor bearing  | Ball bearing  |
| Technical features   | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Tach output</li> <li>- Output limit</li> <li>- Motor current limit</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage detection</li> </ul> |
| EMC interference immunity  | Acc. to EN 61000-6-2 (industrial environment)   |
| EMC interference emission  | Acc. to EN 61000-6-4 (industrial environment)   |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA   |
| Motor protection   | Locked-rotor protection   |
| Cable exit   | Variable  |
| Protection class   | I (if protective earth is connected by customer)  |
| Product conforming to standard                                     | EN 60335-1; CE  |




Product drawing

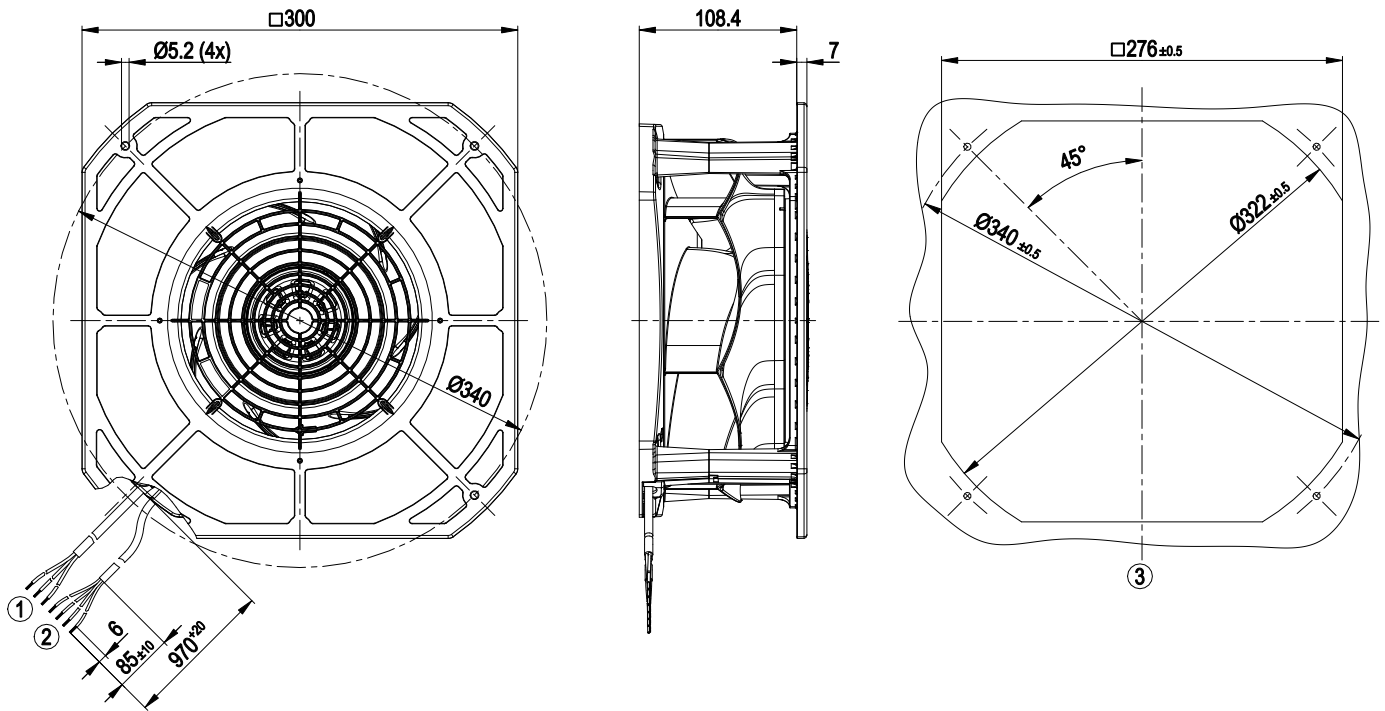

|   |   |
|---|---|
| 1 | Connection line PVC AWG20, 3x lead tips crimped |
| 2 | Connection line PVC AWG22, 4x lead tips crimped |
| 3 | Mounting dimensions                             |




## Connection screen

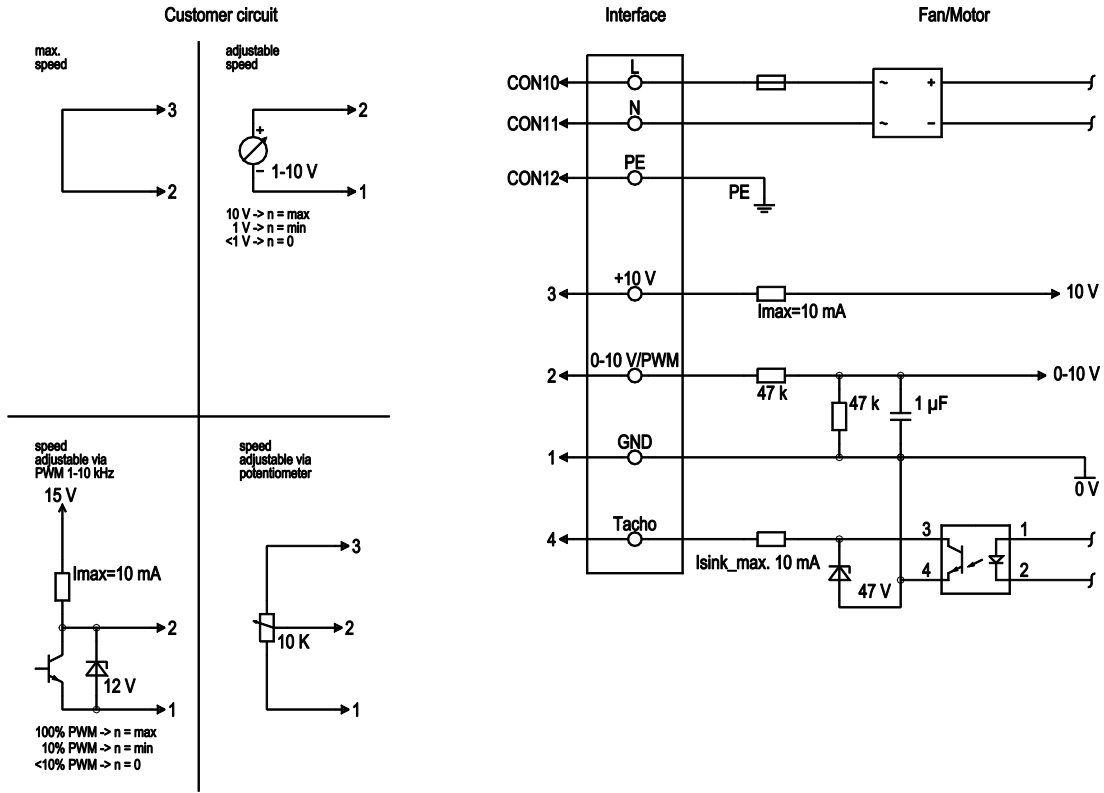

| No. | Conn. | Designation | Colour       | Function / assignment   |
|-----|-------|-------------|--------------|---|
|     | CON10 | L           | black        | Mains connection, power supply, phase, see type plate for voltage range   |
|     | CON11 | N           | blue         | Mains connection, power supply, neutral conductor, see type plate for voltage range   |
|     | CON12 | PE          | green/yellow | Earth connection  |
|     | 2     | 0- 10V PWM  | yellow       | 0-10 V/PWM control input, R <sub>i</sub> =100 kΩ, SELV  |
|     | 4     | Tach        | white        | Speed monitoring output, open collector, 1 pulse per revolution, I <sub>sink max</sub> = 10 mA, SELV  |
|     | 3     | +10 V       | red          | Fixed voltage output 10 VDC +/-3 %, I <sub>max</sub> . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. potentiometer), SELV |
|     | 1     | GND         | blue         | Signal ground for control interface, SELV   |



## Charts: Air flow 50 Hz

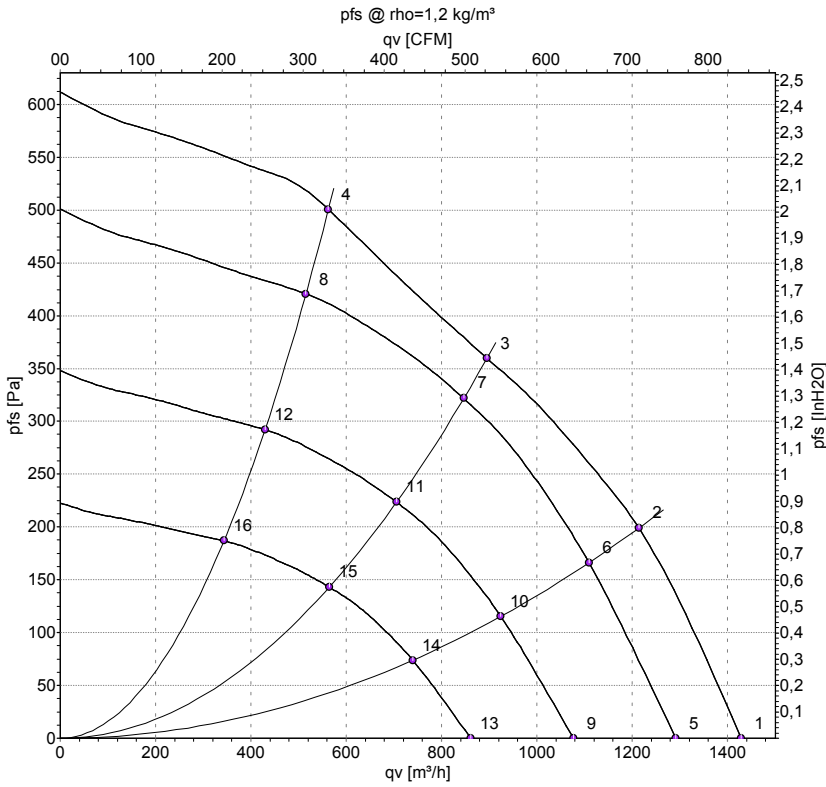

Measurement: LU-154717-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | m <sup>3</sup> /h | Pa              | cfm            | inH2O           |
| 1  | 230 | 50 | 2655              | 143             | 1.18 | 68                | 76                | 1430              | 0               | 840            | 0.00            |
| 2  | 230 | 50 | 2630              | 170             | 1.40 | 64                | 72                | 1215              | 200             | 715            | 0.80            |
| 3  | 230 | 50 | 2510              | 170             | 1.40 | 60                | 67                | 895               | 360             | 525            | 1.45            |
| 4  | 230 | 50 | 2620              | 168             | 1.39 | 65                | 73                | 560               | 500             | 330            | 2.01            |
| 5  | 230 | 50 | 2400              | 105             | 0.87 | 66                | 73                | 1290              | 0               | 760            | 0.00            |
| 6  | 230 | 50 | 2400              | 129             | 1.07 | 62                | 69                | 1110              | 168             | 655            | 0.67            |
| 7  | 230 | 50 | 2400              | 144             | 1.19 | 59                | 66                | 845               | 322             | 500            | 1.29            |
| 8  | 230 | 50 | 2400              | 129             | 1.07 | 63                | 70                | 515               | 421             | 305            | 1.69            |
| 9  | 230 | 50 | 2000              | 61              | 0.51 | 61                | 69                | 1075              | 0               | 635            | 0.00            |
| 10 | 230 | 50 | 2000              | 75              | 0.62 | 57                | 65                | 925               | 116             | 545            | 0.47            |
| 11 | 230 | 50 | 2000              | 83              | 0.69 | 54                | 62                | 705               | 224             | 415            | 0.90            |
| 12 | 230 | 50 | 2000              | 75              | 0.62 | 59                | 66                | 430               | 292             | 250            | 1.17            |
| 13 | 230 | 50 | 1600              | 31              | 0.26 | 55                | 63                | 860               | 0               | 505            | 0.00            |
| 14 | 230 | 50 | 1600              | 38              | 0.32 | 52                | 59                | 740               | 75              | 435            | 0.30            |
| 15 | 230 | 50 | 1600              | 43              | 0.35 | 48                | 56                | 565               | 143             | 330            | 0.57            |
| 16 | 230 | 50 | 1600              | 38              | 0.32 | 53                | 60                | 345               | 187             | 200            | 0.75            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · LpA<sub>in</sub> = Sound pressure level inlet side · LwA<sub>in</sub> = Sound power level inlet side · q<sub>v</sub> = Air flow  
P<sub>fs</sub> = Pressure increase

