

K3G250-RO40-A2 ebmpapst Datasheet

sales@fansco.com

www.fansco.com



## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G250-RO40-A2    |            |
| Motor                    | M3G084-DF         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 277 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 3700       |
| Power consumption        | W                 | 490        |
| Current draw             | A                 | 2.2        |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 55         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to ErP Directive

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 57.2   | 48.2      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 71     | 62        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 0.48 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 1205 |
| 09 Pressure increase $p_{fs}$ | Pa                | 754  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 3670 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$ 


LU-140418



## Technical description


|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 8 kg                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Fan size                                                                   | 250 mm                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Impeller material                                                          | PA plastic                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Support plate material                                                     | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                            |
| Support bracket material                                                   | Steel, painted black                                                                                                                                                                                                                                                                                                                                                                                                               |
| Inlet nozzle material                                                      | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                            |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                     |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Insulation class                                                           | "B"                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Moisture (F) / Environmental (H) protection class                          | F3-1                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 80 °C                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Installation position                                                      | Shaft horizontal or rotor on top; rotor on bottom on request                                                                                                                                                                                                                                                                                                                                                                       |
| Condensation drainage holes                                                | None                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Alarm relay</li> <li>- Motor current limitation</li> <li>- PFC, active</li> <li>- Soft start</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from supply</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC immunity to interference                                               | According to EN 61000-6-2 (industrial environment)                                                                                                                                                                                                                                                                                                                                                                                 |
| EMC circuit feedback                                                       | According to EN 61000-3-2/3                                                                                                                                                                                                                                                                                                                                                                                                        |
| EMC interference emission                                                  | According to EN 61000-6-3 (household environment)                                                                                                                                                                                                                                                                                                                                                                                  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                                                                                                                                                                                                                                                                                                                                              |
| With cable                                                                 | Variable                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                   |
| Conformity with standards                                                  | EN 61800-5-1; CE                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Approval                                                                   | CCC; EAC; UL 2111; CSA C22.2 No. 77                                                                                                                                                                                                                                                                                                                                                                                                |

## Product drawing

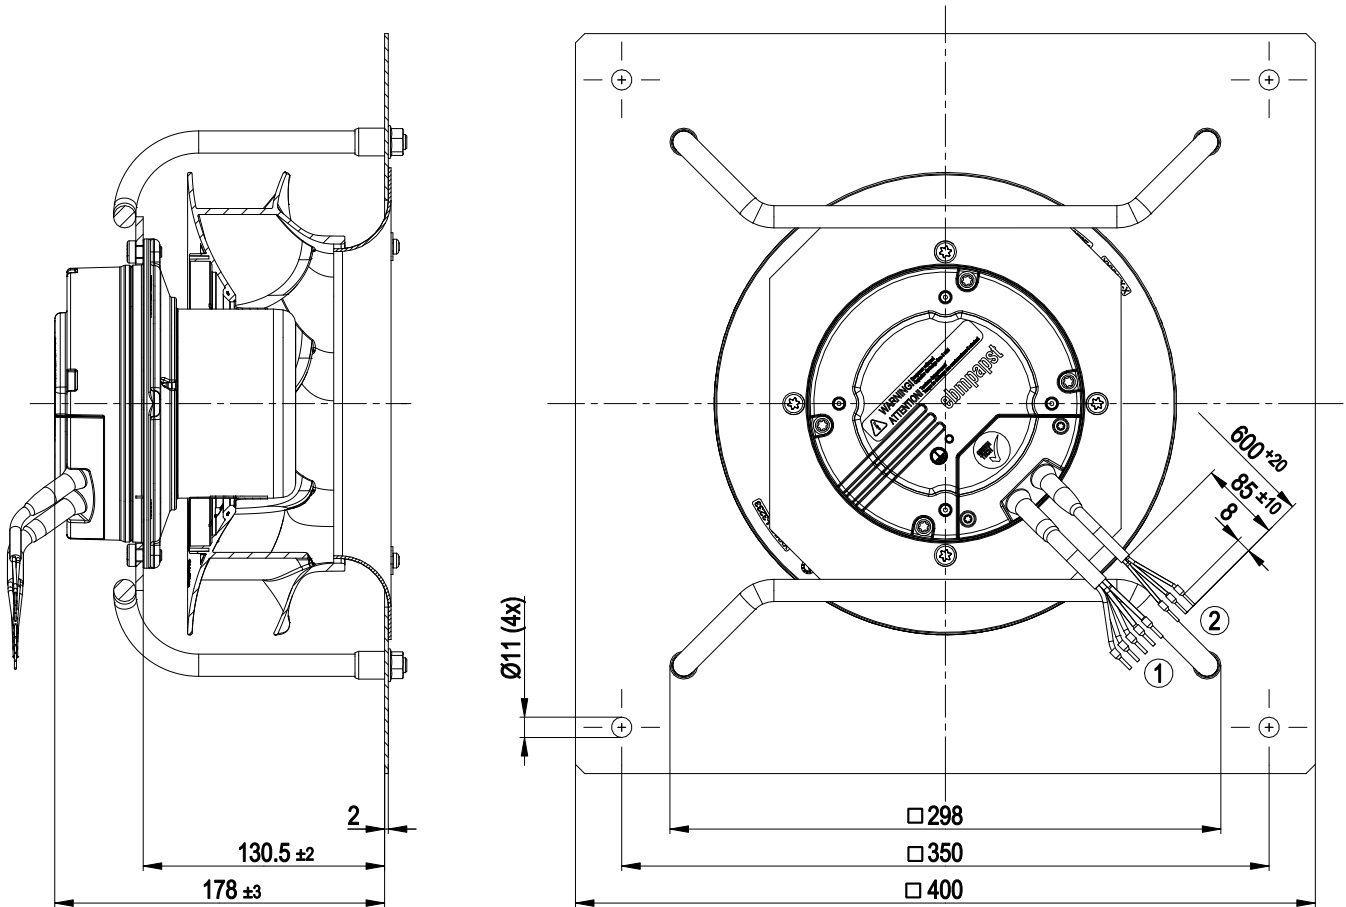


- |   |                                      |
|---|--------------------------------------|
| 1 | Cable PVC AWG18, 5x crimped ferrules |
| 2 | Cable PVC AWG22, 3x crimped ferrules |

## Connection diagram

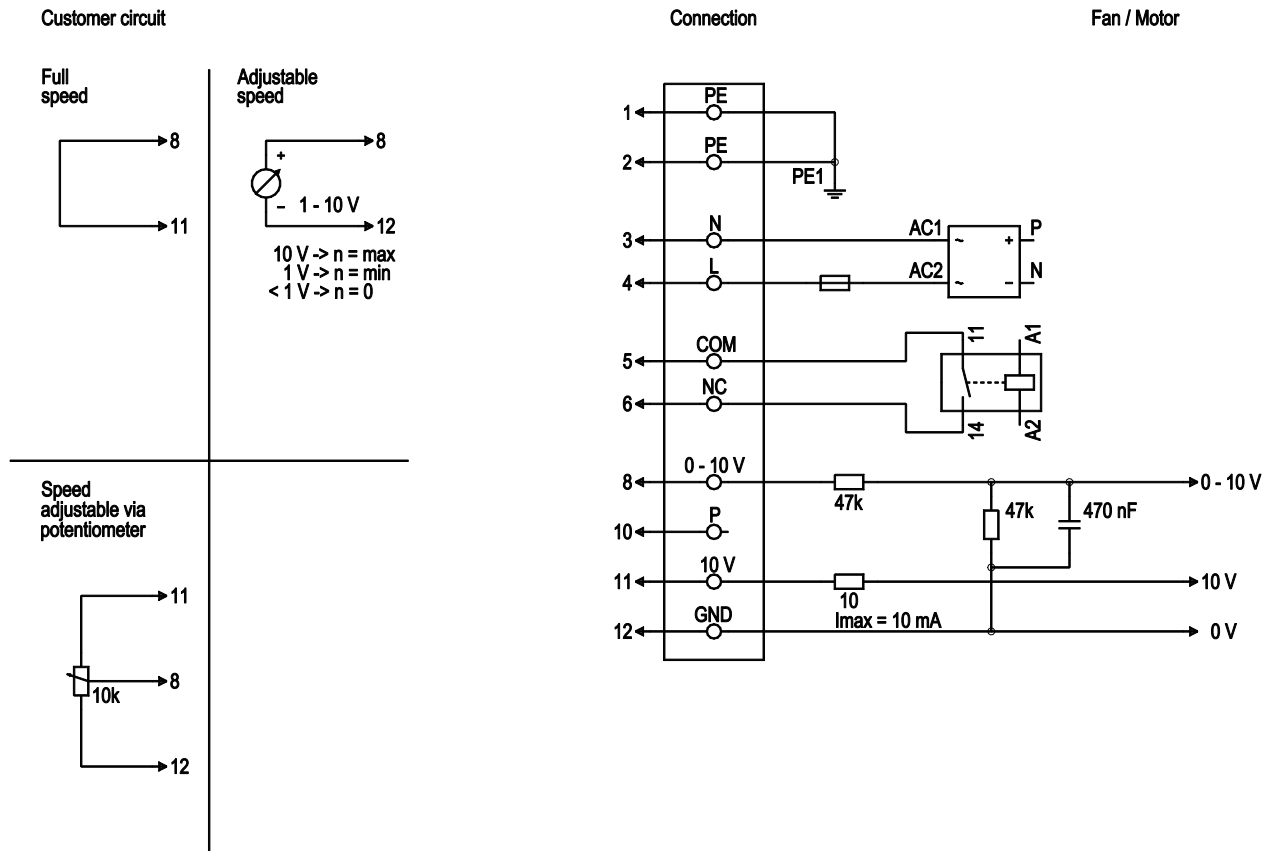

| No. | Conn. | Designation | Color        | Function/assignment                                                                                            |
|-----|-------|-------------|--------------|----------------------------------------------------------------------------------------------------------------|
| 1   | 1, 2  | PE          | green/yellow | Protective earth                                                                                               |
| 1   | 3     | N           | blue         | Power supply, neutral conductor, see nameplate for voltage range, 50/60 Hz                                     |
| 1   | 4     | L           | black        | Power supply, phase, see nameplate for voltage range, 50/60 Hz                                                 |
| 1   | 5     | COM         | white 1      | Floating status contact, break for failure (2 A, max. 250 VAC, min. 10 mA)                                     |
| 1   | 6     | NC          | white 2      | Floating status contact, break for failure                                                                     |
| 2   | 8     | 0 -10 V     | yellow       | Control input, set value 0-10 VDC, impedance 100 kOhm, SELV                                                    |
| 2   | 10    | P           | orange       | not used                                                                                                       |
| 2   | 11    | 10 VDC      | red          | Voltage output 10 VDC ( $\pm 3\%$ ), max. 10 mA, power supply for external devices (e.g. potentiometers), SELV |
| 2   | 12    | GND         | blue         | Reference ground for control interface, SELV                                                                   |

## Curves: Air performance 50 Hz

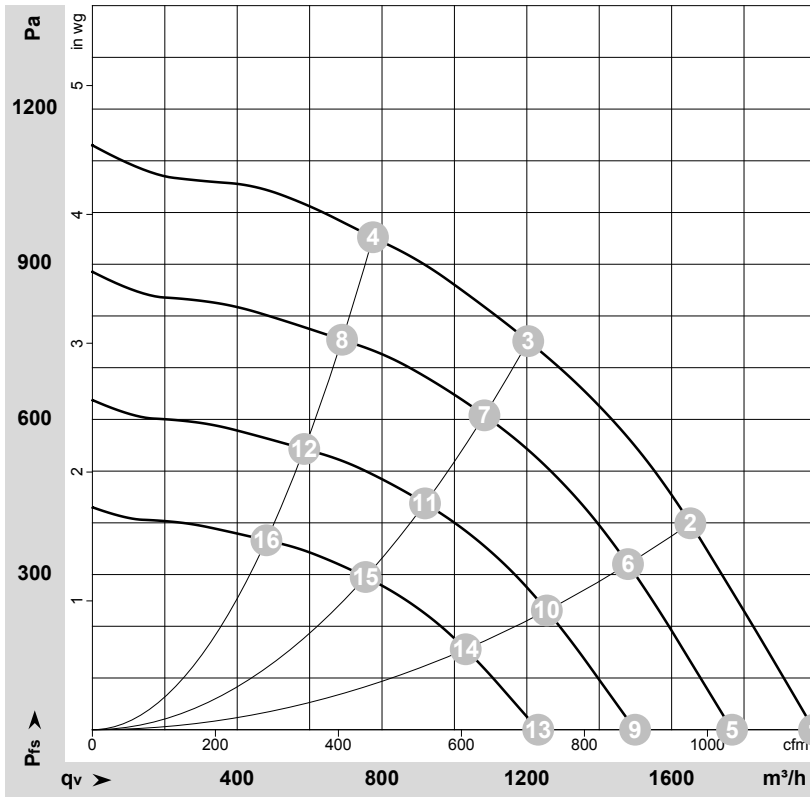

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-140418-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | qv   | p <sub>fs</sub> | qv   | p <sub>fs</sub>    |
|----|-----|----|-------------------|-----------------|------|------|-----------------|------|--------------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | m³/h | Pa              | CFM  | inH <sub>2</sub> O |
| 1  | 230 | 50 | 3700              | 407             | 1.79 | 1995 | 0               | 1175 | 0.00               |
| 2  | 230 | 50 | 3700              | 463             | 2.03 | 1650 | 400             | 970  | 1.61               |
| 3  | 230 | 50 | 3700              | 490             | 2.20 | 1205 | 750             | 710  | 3.01               |
| 4  | 230 | 50 | 3700              | 459             | 2.01 | 775  | 950             | 455  | 3.81               |
| 5  | 230 | 50 | 3300              | 283             | 1.25 | 1765 | 0               | 1040 | 0.00               |
| 6  | 230 | 50 | 3300              | 332             | 1.46 | 1480 | 321             | 870  | 1.29               |
| 7  | 230 | 50 | 3300              | 355             | 1.56 | 1085 | 609             | 635  | 2.44               |
| 8  | 230 | 50 | 3300              | 323             | 1.42 | 690  | 754             | 405  | 3.03               |
| 9  | 230 | 50 | 2800              | 173             | 0.76 | 1500 | 0               | 880  | 0.00               |
| 10 | 230 | 50 | 2800              | 203             | 0.89 | 1255 | 231             | 740  | 0.93               |
| 11 | 230 | 50 | 2800              | 217             | 0.95 | 920  | 439             | 540  | 1.76               |
| 12 | 230 | 50 | 2800              | 198             | 0.86 | 585  | 543             | 345  | 2.18               |
| 13 | 230 | 50 | 2300              | 96              | 0.42 | 1230 | 0               | 725  | 0.00               |
| 14 | 230 | 50 | 2300              | 113             | 0.49 | 1030 | 156             | 605  | 0.63               |
| 15 | 230 | 50 | 2300              | 120             | 0.53 | 755  | 296             | 445  | 1.19               |
| 16 | 230 | 50 | 2300              | 109             | 0.48 | 480  | 366             | 285  | 1.47               |

U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

