

Nominal data

Type	K3G280-AU11-C8	
Motor	M3G084-GF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	3100
Power consumption	W	1000
Current draw	A	1.6
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	64.6	51.2	09 Power consumption P_{ed}	kW	0.94
02 Measurement category		A		09 Air flow q_v	m ³ /h	2405
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	842
04 Efficiency grade N		75.4	62	10 Speed (rpm) n	min ⁻¹	3115
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-198028




Technical description

Weight	11.6 kg
Size	280 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Number of blades	7
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Operation at +60 °C to +70 °C and power consumption of 735 W or more can result in decreased service life.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 10 mA - Output 20 VDC, max. 50 mA - Output for slave 0-10 V - Input for sensor 0-10 V or 4-20 mA - External 24 V input (parameter setting) - Alarm relay - Power limiter - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Connector with cable
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

EC centrifugal module - RadiPac

backward-curved, single-intake
with support bracket

Product drawing

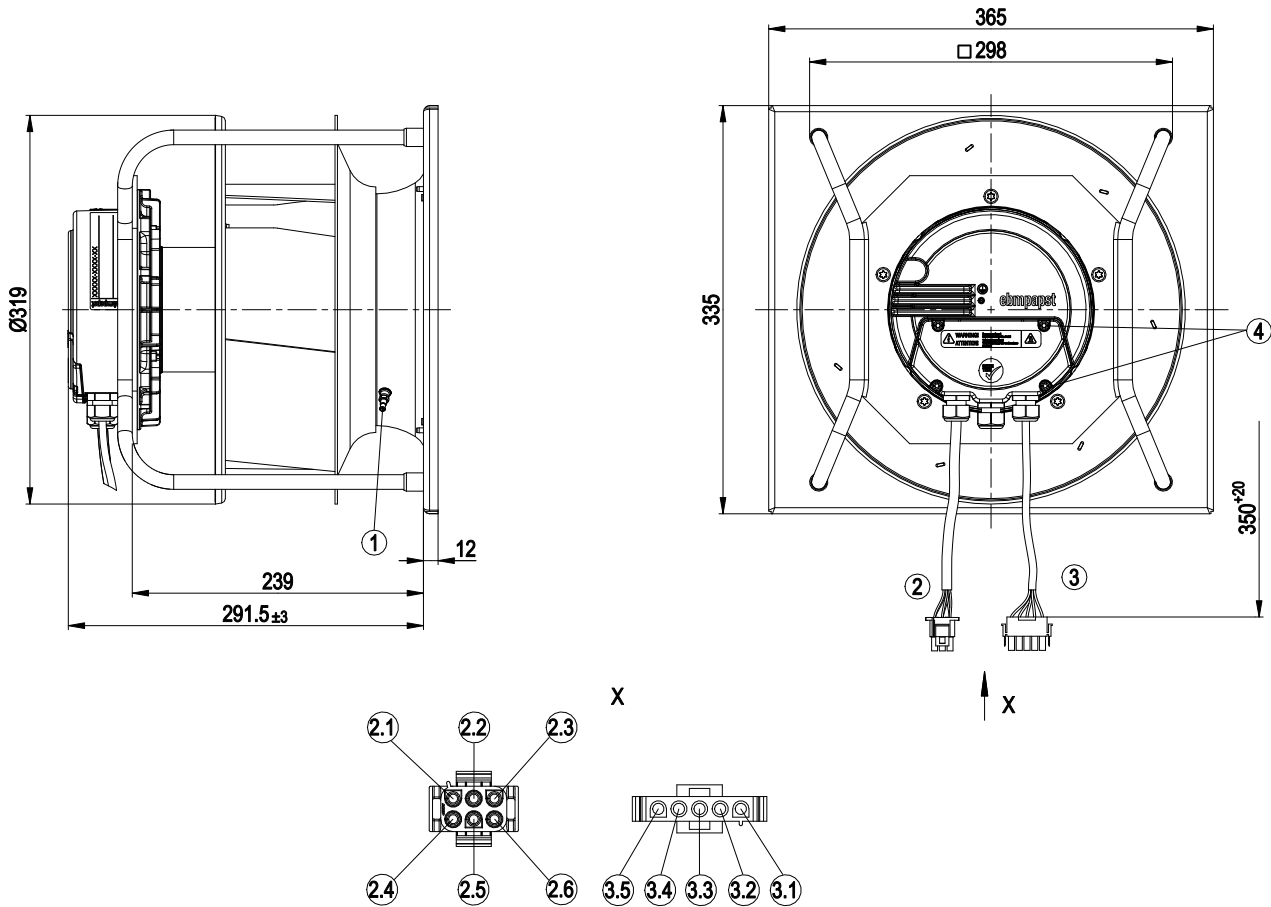

1	Inlet ring with pressure tap (k-factor 93)
2	Cable PVC AWG20 with 6-pole connector housing TE 350715-4 and 5x plug pin TE 350218-1
2.1	0-10 V/PWM (red)
2.2	not used
2.3	NO (yellow)
2.4	GND (blue)
2.5	COM (white)
2.6	NC (black)
3	Cable PVC AWG18 with 5-pole connector housing TE 350809-1 and 5x plug pin TE 926887-1
3.1	L1 (black)
3.2	L2 (black)
3.3	L3 (black)
3.4	PE (yellow/green)
3.5	PE (yellow/green)




EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Connection diagram

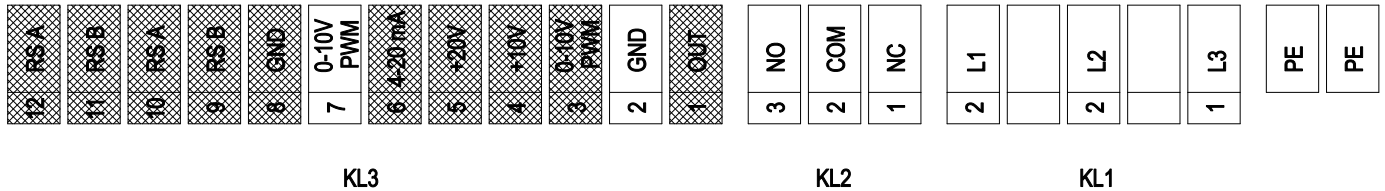


Shaded gray => not brought out via leads

No.	Conn.	Designation	Color	Function/assignment
1	-	PE	green/yellow	Protective earth terminal
1	-	PE	green/yellow	Protective earth terminal
1	KL1	L1	black 1	Power supply, see nameplate for voltage range, 50/60 Hz
1	KL1	L2	black 2	Power supply, see nameplate for voltage range, 50/60 Hz
1	KL1	L3	black 3	Power supply, see nameplate for voltage range, 50/60 Hz
2	KL2	NC	black	Floating status contact, break for failure
2	KL2	COM	white	Floating status contact, changeover contact, common connection (2 A, max. 250 VAC, min. 10 mA, AC1)
2	KL2	NO	yellow	Floating status contact, make for failure
-	KL3	OUT		Analog output, 0-10 VDC, max. 3 mA, SELV Output of current motor modulation level: 1 V corresponds to 10% modulation level. 10 V corresponds to 100% modulation level.
-	KL3	GND	blue	Reference ground for control interface, SELV
-	KL3	0-10 V PWM		Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
-	KL3	+10 V		Voltage output 10 VDC (±3%), max. 10 mA, power supply for external devices (e.g. potentiometer), SELV
-	KL3	+20 V		Voltage output 20 VDC (+25%/-10%), max. 50 mA, power supply for external devices (e.g. sensors), SELV
-	KL3	4-20 mA		Use control / current sensor value input 4-20 mA, impedance 100 Ω only as alternative to 0-10 V input, SELV
2	KL3	0-10 V PWM	red	Use control / current sensor value input 0-10 VDC, impedance 100 kΩ only as alternative to 4-20 mA input, SELV
-	KL3	GND		Reference ground for control interface, SELV
-	KL3	RSB		RS485 interface for MODBUS, RSB
-	KL3	RSA		RS485 interface for MODBUS, RSA
-	KL3	RSB		RS485 interface for MODBUS, RSB
-	KL3	RSA		RS485 interface for MODBUS, RSA



Curves: Air performance 50 Hz

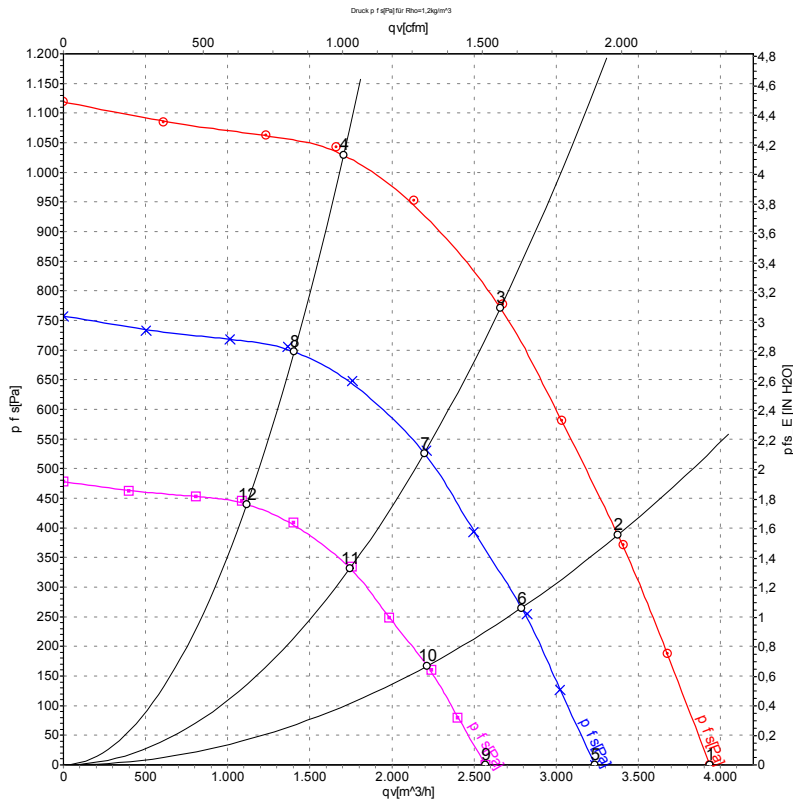

Measurement: LU-130335-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	P _{fs}	q _v	P _{fs}
	V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	400	50	3100	645	1.04	78	86	93	3935	0	2315	0.00
2	400	50	3100	852	1.35	75	83	90	3375	390	1985	1.57
3	400	50	3100	1000	1.60	72	80	86	2660	775	1565	3.11
4	400	50	3100	921	1.46	76	83	89	1705	1030	1005	4.14
5	400	50	2575	358	0.58	74	82	88	3235	0	1905	0.00
6	400	50	2575	482	0.76	71	79	85	2790	269	1640	1.08
7	400	50	2575	562	0.89	68	76	82	2195	534	1295	2.14
8	400	50	2575	514	0.82	71	79	84	1405	700	825	2.81
9	400	50	2045	180	0.29	69	77	83	2570	0	1515	0.00
10	400	50	2045	242	0.38	66	74	80	2215	170	1305	0.68
11	400	50	2045	282	0.45	63	71	77	1745	337	1025	1.35
12	400	50	2045	257	0.41	66	74	79	1115	442	655	1.77

U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase

