

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G310-AY90-N2    |            |
| Motor                    | M3G112-EA         |            |
| Phase                    |                   | 3~         |
| Nominal voltage          | VAC               | 400        |
| Nominal voltage range    | VAC               | 380 .. 480 |
| Frequency                | Hz                | 50/60      |
| Method of obtaining data |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 3000       |
| Power consumption        | W                 | 1200       |
| Current draw             | A                 | 1.8        |
| Min. ambient temperature | °C                | -40        |
| Max. ambient temperature | °C                | 60         |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 57.5   | 52.3      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 67.2   | 62        |
| 05 Variable speed drive           |   | Yes    |           |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |      |
|-------------------------------|-------------------|------|
| 09 Power consumption $P_{ed}$ | kW                | 1.18 |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 2635 |
| 09 Pressure increase $p_{fs}$ | Pa                | 862  |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 3005 |
| 11 Specific ratio*            |                   | 1.01 |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-177434



## Technical description

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 18.08 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Size                                                                       | 310 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Motor size                                                                 | 112                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Rotor surface                                                              | Painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Electronics housing material                                               | Die-cast aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Impeller material                                                          | Sheet aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Support plate material                                                     | Sheet steel, galvanized and painted black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Spacer material                                                            | Sheet steel, galvanized and coated with black plastic (RAL 9005)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Inlet nozzle material                                                      | Sheet steel, galvanized                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Number of blades                                                           | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Degree of protection                                                       | IP55; installation- and position-dependent                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Moisture (F) / Environmental (H) protection class                          | H3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Condensation drainage holes                                                | On rotor side                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Mode                                                                       | S1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Motor bearing                                                              | Ball bearing; (sealed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Technical features                                                         | <ul style="list-style-type: none"> <li>- Output 10 VDC, max. 10 mA</li> <li>- Alarm relay</li> <li>- Integrated PID controller</li> <li>- Run monitoring</li> <li>- Power limiter</li> <li>- Motor current limitation</li> <li>- Emergency operation</li> <li>- PFC, passive</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- EEPROM write cycles: 100,000 maximum</li> <li>- Control input 0-10 VDC / PWM</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Overvoltage detection</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC regulations                                                            | According to EN 50121-3-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Electrical hookup                                                          | Plug                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Motor protection                                                           | Thermal overload protector (TOP) internally connected                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| With cable                                                                 | Lateral                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Conformity with standards                                                  | EN 15085-1, CPC3: 2013; EN 45545-2, HL3: 2013; EN 50121-3-2: 2006; EN 50155: 2008; EN 61373, Cat. 1B: 2010; CE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |

# EC centrifugal module - RadiPac

backward-curved, single-intake

with support structure


|          |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval | EAC                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Comment  | <p>A prerequisite for operation is a Class 1 vehicle electrical system architecture according to EN 50533; if supply potential (e.g. 230 VAC) is passed through the alarm relay, the SELV signal wires lose their property of reinforced insulation and they then have only basic insulation</p> <p>The SELV property (reinforced insulation) is not lost when voltages of up to 110 VDC are passed through the alarm relay.</p> |



# EC centrifugal module - RadiPac


backward-curved, single-intake  
with support structure

## Product drawing

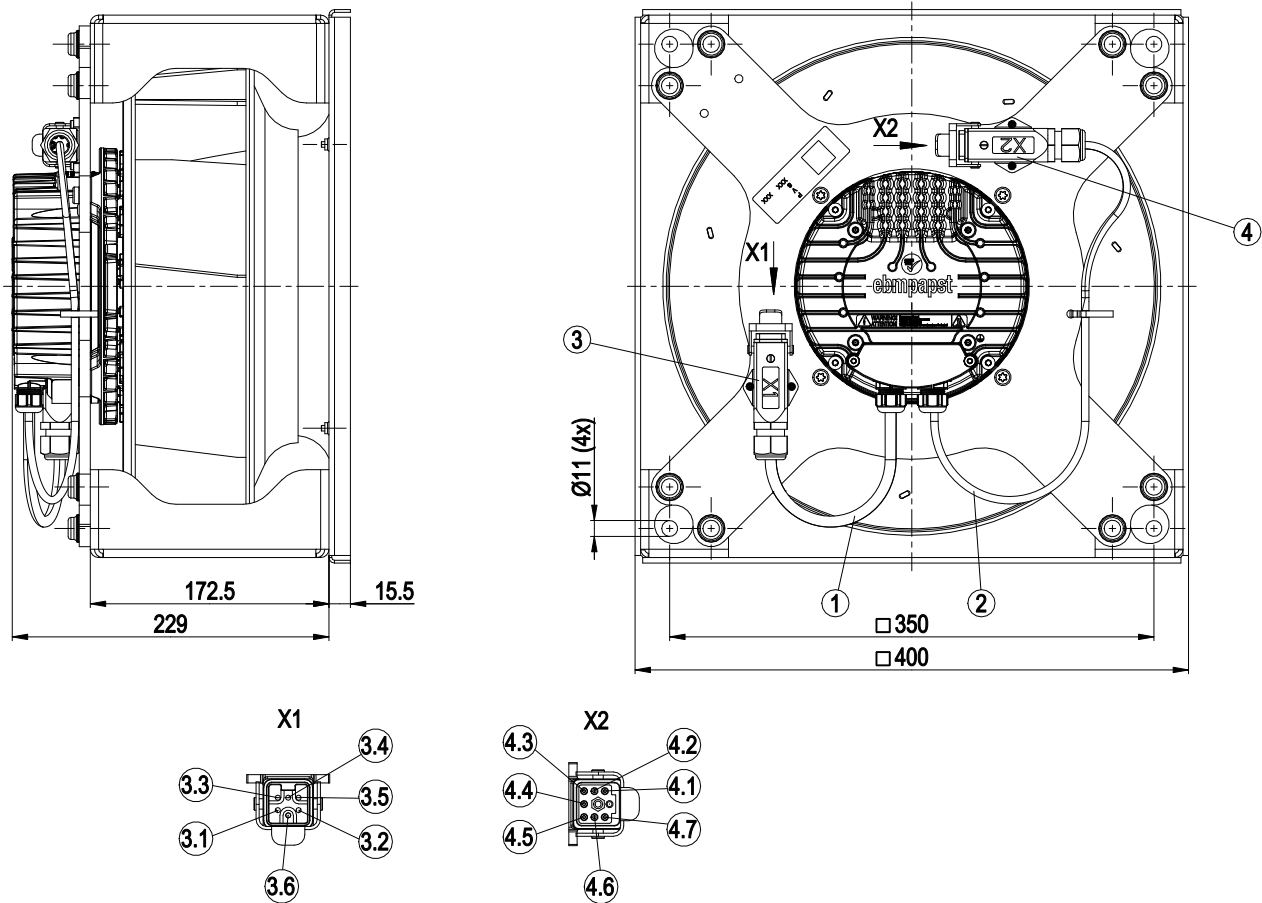


|     |                                                                                        |
|-----|----------------------------------------------------------------------------------------|
| 1   | Cable, halogen-free, railway application EN 45545, 4G 1.5 mm <sup>2</sup>              |
| 2   | Cable, halogen-free, railway application EN 45545, 7x 0.5 mm <sup>2</sup>              |
| 3   | Connector housing Harting 19 20 003 1250 with connector housing Harting 09 12 007 3001 |
| 3.1 | not used                                                                               |
| 3.2 | not used                                                                               |
| 3.3 | L2                                                                                     |
| 3.4 | L3                                                                                     |
| 3.5 | L1                                                                                     |
| 3.6 | PE                                                                                     |
| 4   | Connector housing Harting 19 20 003 1250 with pin insert Harting 09 20 005 3001        |
| 4.1 | GND                                                                                    |
| 4.2 | 0-10 V                                                                                 |
| 4.3 | RSB                                                                                    |
| 4.4 | +10 V                                                                                  |
| 4.5 | RSA                                                                                    |
| 4.6 | COM                                                                                    |
| 4.7 | NC                                                                                     |

## Connection diagram

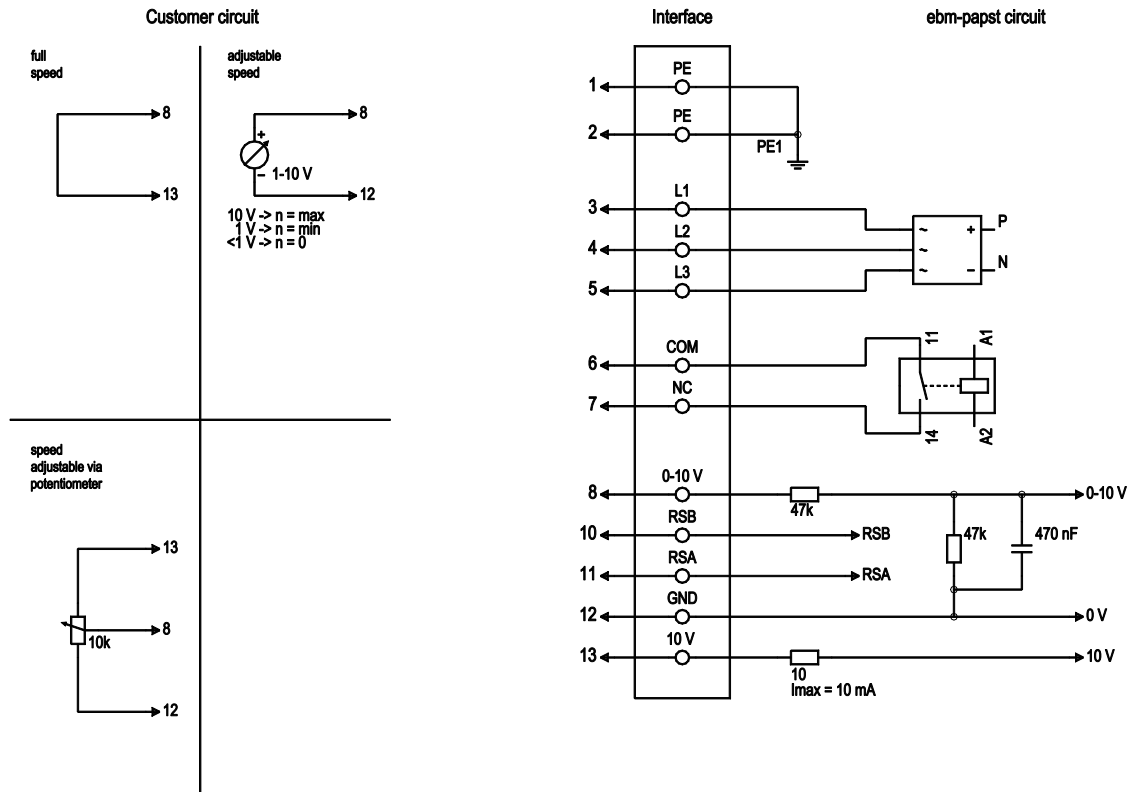

| No. | Conn. | Designation | Function/assignment                                                                                                                                                                                                            |
|-----|-------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 1     | PE          | Protective earth                                                                                                                                                                                                               |
| 1   | 2     | PE          | not brought out via wire                                                                                                                                                                                                       |
| 1   | 3     | L1          | Power supply, phase 50/60 Hz                                                                                                                                                                                                   |
| 1   | 4     | L2          | Power supply, phase 50/60 Hz                                                                                                                                                                                                   |
| 1   | 5     | L3          | Power supply, phase 50/60 Hz                                                                                                                                                                                                   |
| 2   | 6     | COM         | Status relay, floating status contact, common connection, contact rating 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation on control interface side, basic insulation on supply side according to EN 50124-1 |
| 2   | 7     | NC          | Status relay, floating status contact, break for failure, contact rating 250 VAC / max. 2 A (AC1), min. 1 mA / 5 VDC, reinforced insulation on control interface side, basic insulation on supply side according to EN 50124-1 |
| 2   | 8     | 0-10 V      | Analog input (set value) SELV, 0-10 V, $R_i = 100\text{ k}\Omega$ , adjustable curve                                                                                                                                           |
| 2   | 10    | RSB         | RS485 interface for MODBUS, RSB; SELV                                                                                                                                                                                          |
| 2   | 11    | RSA         | RS485 interface for MODBUS, RSA; SELV                                                                                                                                                                                          |
| 2   | 12    | GND         | Reference ground for interface, SELV                                                                                                                                                                                           |
| 2   | 13    | +10 V       | Fixed voltage output 10 VDC, SELV, +10 V $\pm 3\%$ , max. 10 mA, short-circuit-proof, power supply for external devices (e.g. potentiometers)                                                                                  |

## Curves: Air performance 50 Hz

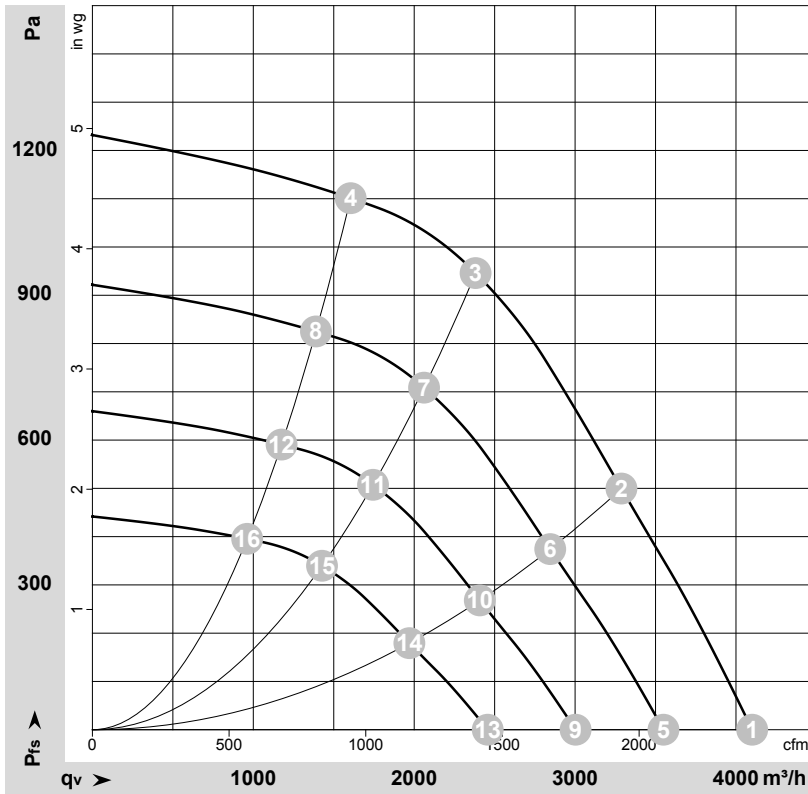

$$\rho = 1.173 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-177434-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1  | 400 | 50 | 3000              | 861             | 1.33 | 83                | 91                | 95                 | 4100              | 0               | 2415           | 0.00            |
| 2  | 400 | 50 | 3000              | 1054            | 1.61 | 78                | 86                | 91                 | 3290              | 500             | 1935           | 2.01            |
| 3  | 400 | 50 | 3000              | 1200            | 1.80 | 78                | 87                | 90                 | 2380              | 950             | 1400           | 3.81            |
| 4  | 400 | 50 | 3000              | 1088            | 1.66 | 79                | 88                | 92                 | 1605              | 1100            | 945            | 4.42            |
| 5  | 400 | 50 | 2600              | 558             | 0.86 | 80                | 88                | 92                 | 3550              | 0               | 2090           | 0.00            |
| 6  | 400 | 50 | 2600              | 683             | 1.05 | 74                | 82                | 87                 | 2845              | 374             | 1675           | 1.50            |
| 7  | 400 | 50 | 2600              | 770             | 1.18 | 75                | 83                | 86                 | 2060              | 709             | 1215           | 2.85            |
| 8  | 400 | 50 | 2600              | 706             | 1.08 | 75                | 84                | 88                 | 1390              | 826             | 820            | 3.32            |
| 9  | 400 | 50 | 2200              | 338             | 0.52 | 75                | 83                | 88                 | 3005              | 0               | 1765           | 0.00            |
| 10 | 400 | 50 | 2200              | 414             | 0.63 | 70                | 78                | 83                 | 2410              | 268             | 1415           | 1.08            |
| 11 | 400 | 50 | 2200              | 467             | 0.71 | 70                | 79                | 82                 | 1745              | 507             | 1025           | 2.04            |
| 12 | 400 | 50 | 2200              | 428             | 0.65 | 71                | 80                | 84                 | 1175              | 591             | 690            | 2.37            |
| 13 | 400 | 50 | 1800              | 185             | 0.29 | 70                | 78                | 83                 | 2455              | 0               | 1445           | 0.00            |
| 14 | 400 | 50 | 1800              | 227             | 0.35 | 65                | 73                | 78                 | 1970              | 179             | 1160           | 0.72            |
| 15 | 400 | 50 | 1800              | 256             | 0.39 | 65                | 74                | 77                 | 1425              | 340             | 840            | 1.36            |
| 16 | 400 | 50 | 1800              | 234             | 0.36 | 66                | 75                | 79                 | 960               | 396             | 565            | 1.59            |

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
 LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

