

EC centrifugal module - RadiCal

backward-curved, single-intake
with support plate

K3G310-RB01-09 ebmpapst Datasheet
sales@fansco.com
www.fansco.com

Nominal data

Type	K3G310-RB01-09	
Motor	M3G074-CF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 240
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1525
Power consumption	W	150
Current draw	A	1.2
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	60

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	65.8	42.8
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		85	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.14
09 Air flow q_v	m³/h	1355
09 Pressure increase p_{fs}	Pa	229
10 Speed (rpm) n	min ⁻¹	1520
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-137969



Technical description


Size	310 mm
Motor size	74
Rotor surface	Thick-film passivated
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H1
Max. permitted ambient temp. for motor (transport/storage)	+ 80 °C
Min. permitted ambient temp. for motor (transport/storage)	- 40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	None, open rotor
Cooling hole/opening	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Output 10 VDC, max. 10 mA - Tach output - Power limiter - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Control interface with SELV potential safely disconnected from the mains - Overvoltage detection - Thermal overload protection for electronics/motor - Line undervoltage detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Electronic motor protection
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 60034-1; EN 60204-1; EN 60335-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1

EC centrifugal module - RadiCal

backward-curved, single-intake

with support plate

Product drawing

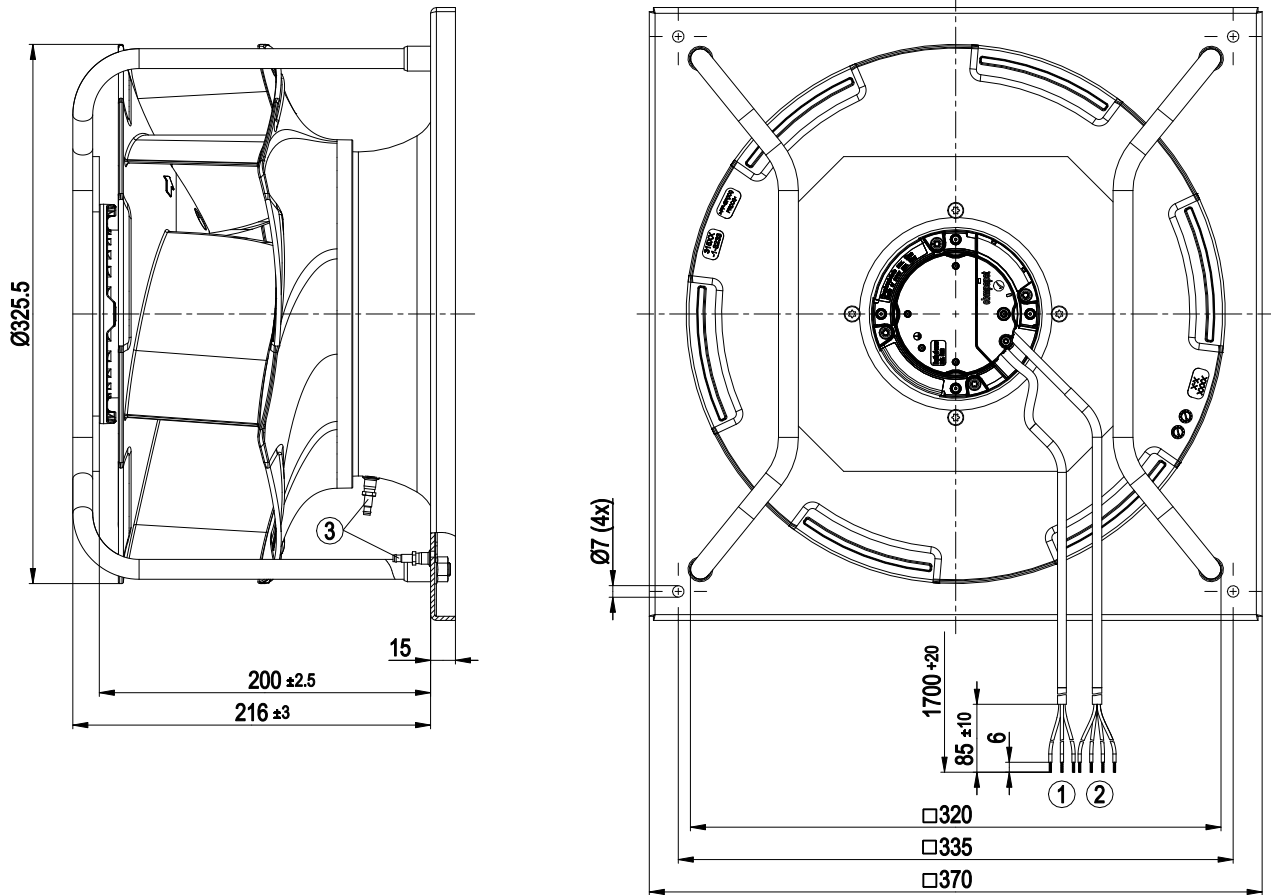


1	Cable PVC AWG20 3x splice
2	Cable PVC AWG22 4x splice
3	Pressure tap (k-factor: 93)

EC centrifugal module - RadiCal

backward-curved, single-intake


with support plate

Connection diagram

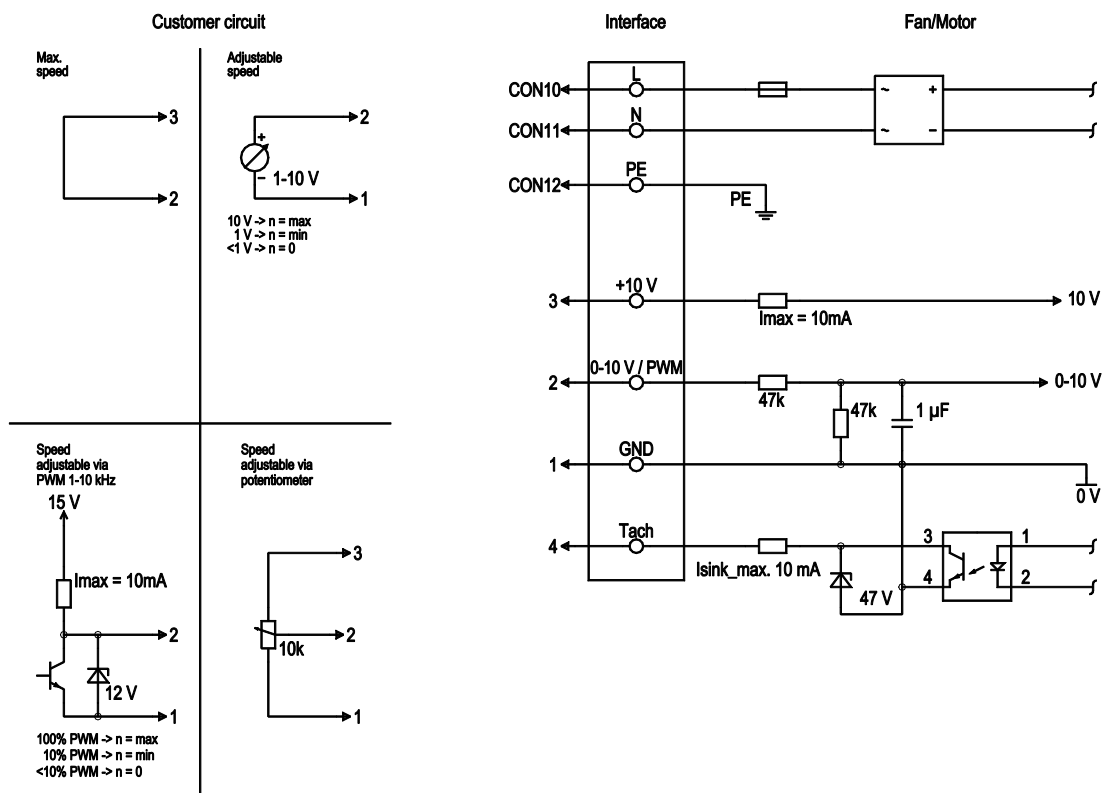

No.	Conn.	Designation	Color	Function/assignment
	CON10	L	black	Supply connection, power supply, phase, see nameplate for voltage range
	CON11	N	blue	Supply connection, power supply, neutral conductor, see nameplate for voltage range
	CON12	PE	green/yellow	Ground connection
	2	0- 10V PWM	yellow	0-10 V / PWM control input, R _i =100 kΩ, SELV
	4	Tach	white	Tach output, open collector, 1 pulse per revolution, I _{sink} max = 10 mA, SELV
	3	+10 V	red	Fixed voltage output 10 VDC +/-3 %, I _{max} . 10 mA, short-circuit-proof, power supply for ext. devices (e.g. pot), SELV
	1	GND	blue	Reference ground for control interface, SELV

Curves: Air performance 50 Hz

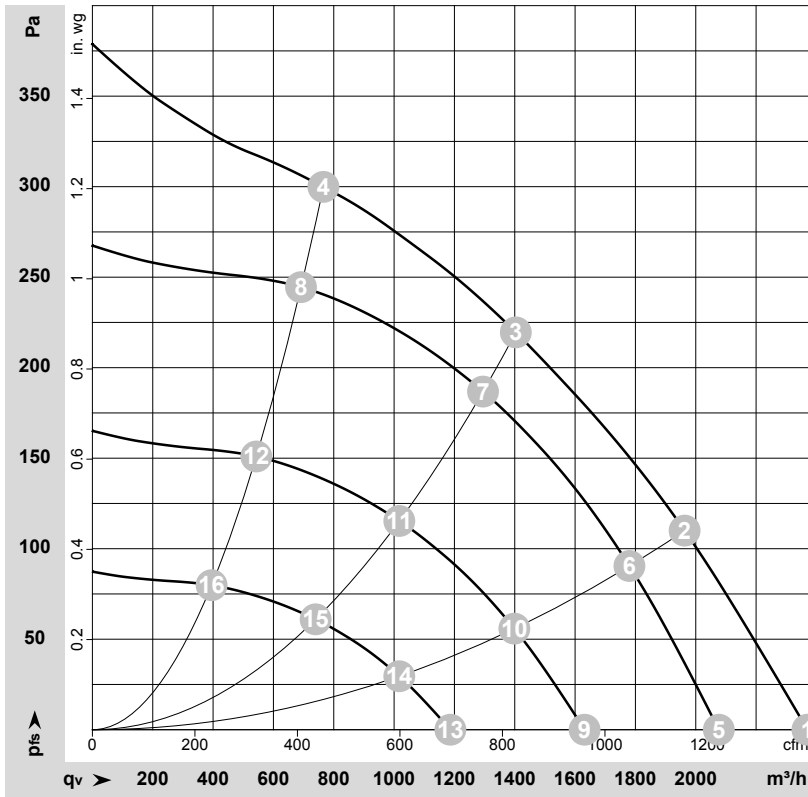

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-137969-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1600	115	0.95	62	69	2370	0	1395	0.00
2	1~	230	50	1545	138	1.13	57	65	1965	110	1155	0.44
3	1~	230	50	1525	150	1.20	52	59	1405	220	825	0.88
4	1~	230	50	1550	134	1.11	55	63	765	300	450	1.20
5	1~	230	50	1400	77	0.64	59	66	2075	0	1220	0.00
6	1~	230	50	1400	103	0.84	55	62	1780	91	1050	0.37
7	1~	230	50	1400	117	0.96	50	57	1295	187	760	0.75
8	1~	230	50	1400	99	0.82	53	60	690	245	405	0.98
9	1~	230	50	1100	37	0.31	53	60	1630	0	960	0.00
10	1~	230	50	1100	50	0.41	49	56	1400	56	825	0.22
11	1~	230	50	1100	57	0.47	44	51	1015	115	600	0.46
12	1~	230	50	1100	48	0.40	47	54	545	151	320	0.61
13	1~	230	50	800	14	0.12	45	52	1185	0	700	0.00
14	1~	230	50	800	19	0.16	41	48	1015	30	600	0.12
15	1~	230	50	800	22	0.18	36	43	740	61	435	0.24
16	1~	230	50	800	18	0.15	39	46	395	80	230	0.32

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
q_v = Air flow · p_{fs} = Pressure increase

