

K3G400-AD27-61 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K3G400-AD27-61	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1420
Power consumption	W	370
Current draw	A	1.65
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	35

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	60.3	46.7
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		75.6	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.35
09 Air flow q_v	m ³ /h	1805
09 Pressure increase p_{fs}	Pa	385
10 Speed (rpm) n	min ⁻¹	1435
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-66012




Technical description

Weight	9.64 kg
Fan size	400 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet aluminum
Spacer material	Aluminum
Inlet nozzle material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - Integrated PID controller - Motor current limitation - PFC, active - RS-485 ebmBUS - Soft start - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	C22.2 No.77 + CAN/CSA-E60730-1; UL1004-3 +60730

EC centrifugal module

backward-curved, single-intake
with support plate

Product drawing

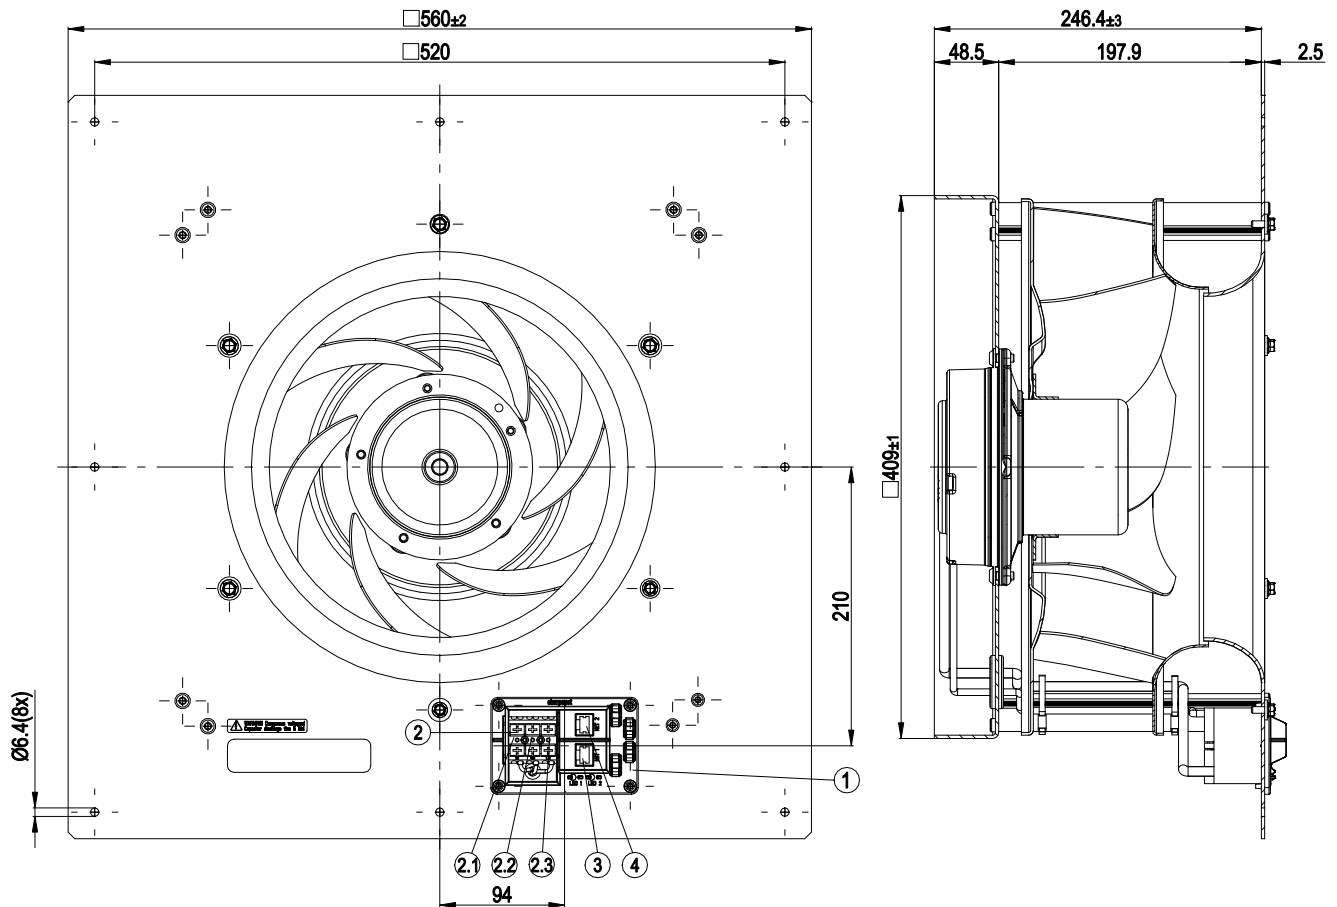


1	RS485 terminal box
2	Terminal strip WAGO 862-2503
2.1	N
2.2	PE
2.3	L
3	RJ45 jack (RSB pin 5 / RSA pin 6)
4	RJ45 jack (RSB pin 5 / RSA pin 6)

EC centrifugal module

backward-curved, single-intake
with support plate


Connection diagram

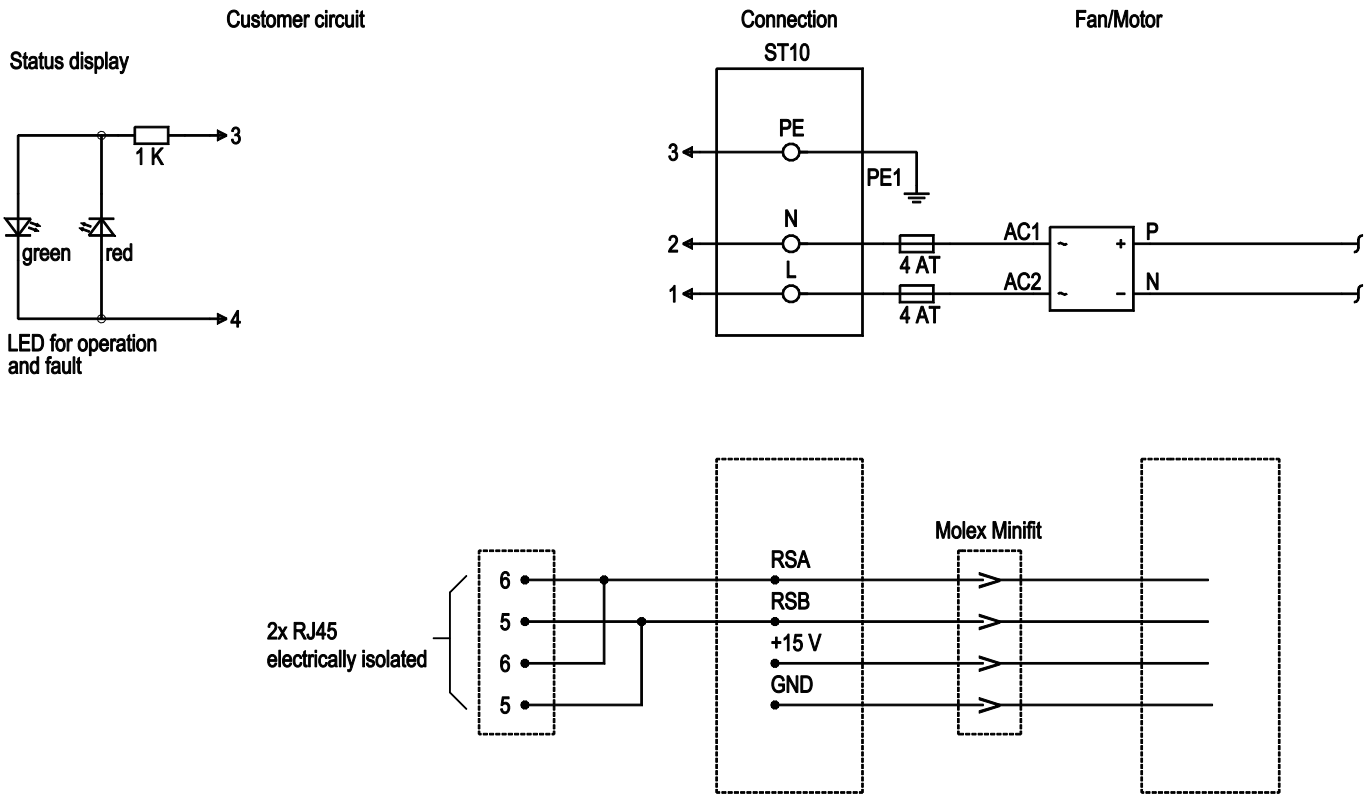

No.	Conn.	Designation	Function/assignment
3	PE		Protective earth
2	N		Supply connection, power supply, neutral conductor, voltage range see nameplate, 50/60 Hz
1	L		Supply connection, power supply, phase, voltage range see nameplate, 50/60 Hz
6	RSA		Bus connection RS485, RSA, ebmBUS; SELV
5	RSB		Bus connection RS485, RSB, ebmBUS; SELV



Curves: Air performance 50 Hz

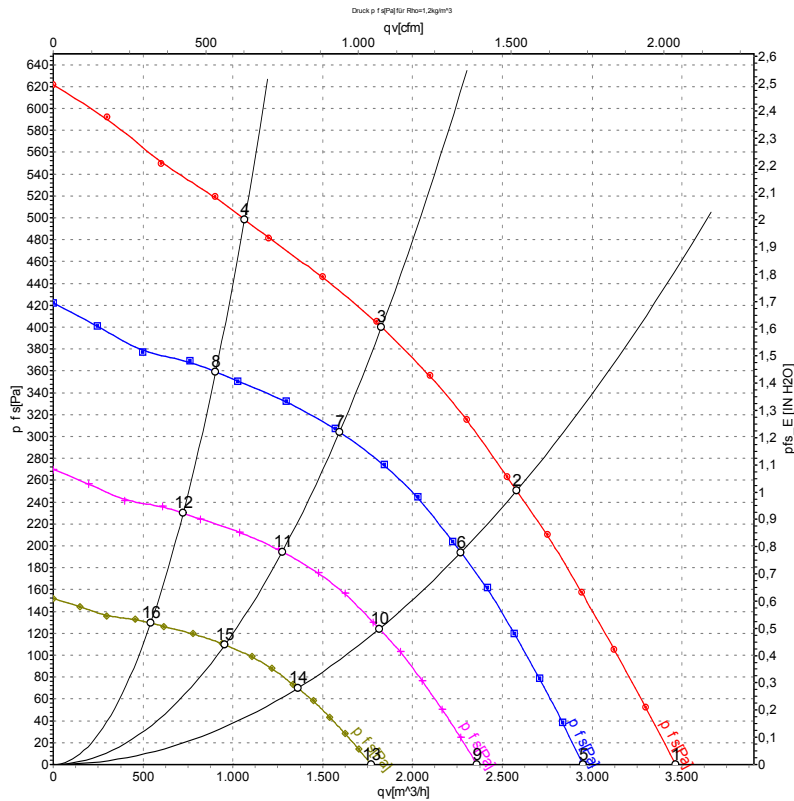

Measurement: LU-66012-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{is}	q _v	p _{is}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	inH ₂ O
1	230	50	1470	323	1.44	3465	0	2040	0.00
2	230	50	1420	370	1.65	2580	250	1520	1.00
3	230	50	1435	358	1.58	1825	400	1075	1.61
4	230	50	1475	316	1.40	1065	500	625	2.01
5	230	50	1250	199	0.89	2950	0	1735	0.00
6	230	50	1250	253	1.12	2270	194	1335	0.78
7	230	50	1250	238	1.05	1595	305	940	1.22
8	230	50	1250	194	0.86	905	359	530	1.44
9	230	50	1000	102	0.45	2360	0	1390	0.00
10	230	50	1000	130	0.57	1815	124	1070	0.50
11	230	50	1000	122	0.54	1275	195	750	0.78
12	230	50	1000	99	0.44	725	230	425	0.92
13	230	50	750	43	0.19	1770	0	1040	0.00
14	230	50	750	55	0.24	1360	70	800	0.28
15	230	50	750	51	0.23	955	110	565	0.44
16	230	50	750	42	0.19	540	129	320	0.52

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{is} = Pressure increase