

Nominal data

Type	K3G400-AH05-21	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1550
Power consumption	W	275
Current draw	A	1.4 (200V)
Min. ambient temperature	°C	0
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	58.8	45.6	09 Power consumption P_{ed}	kW	0.27
02 Measurement category		A		09 Air flow q_v	m ³ /h	1605
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	324
04 Efficiency grade N		75.2	62	10 Speed (rpm) n	min ⁻¹	1565
05 Variable speed drive		Yes		11 Specific ratio*		1.00

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-154637

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



Technical description


Weight	8.75 kg
Size	400 mm
Motor size	84
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum, painted black
Support plate material	Sheet aluminum
Spacer material	Aluminum
Inlet nozzle material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	H0 - dry environment
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - Integrated PID controller - Motor current limitation - PFC, active - RS485 MODBUS-RTU with DCI function - Soft start - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Electrical hookup	Plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 113; EAC; UL 507

EC centrifugal module

backward-curved, single-intake

with support plate

Product drawing

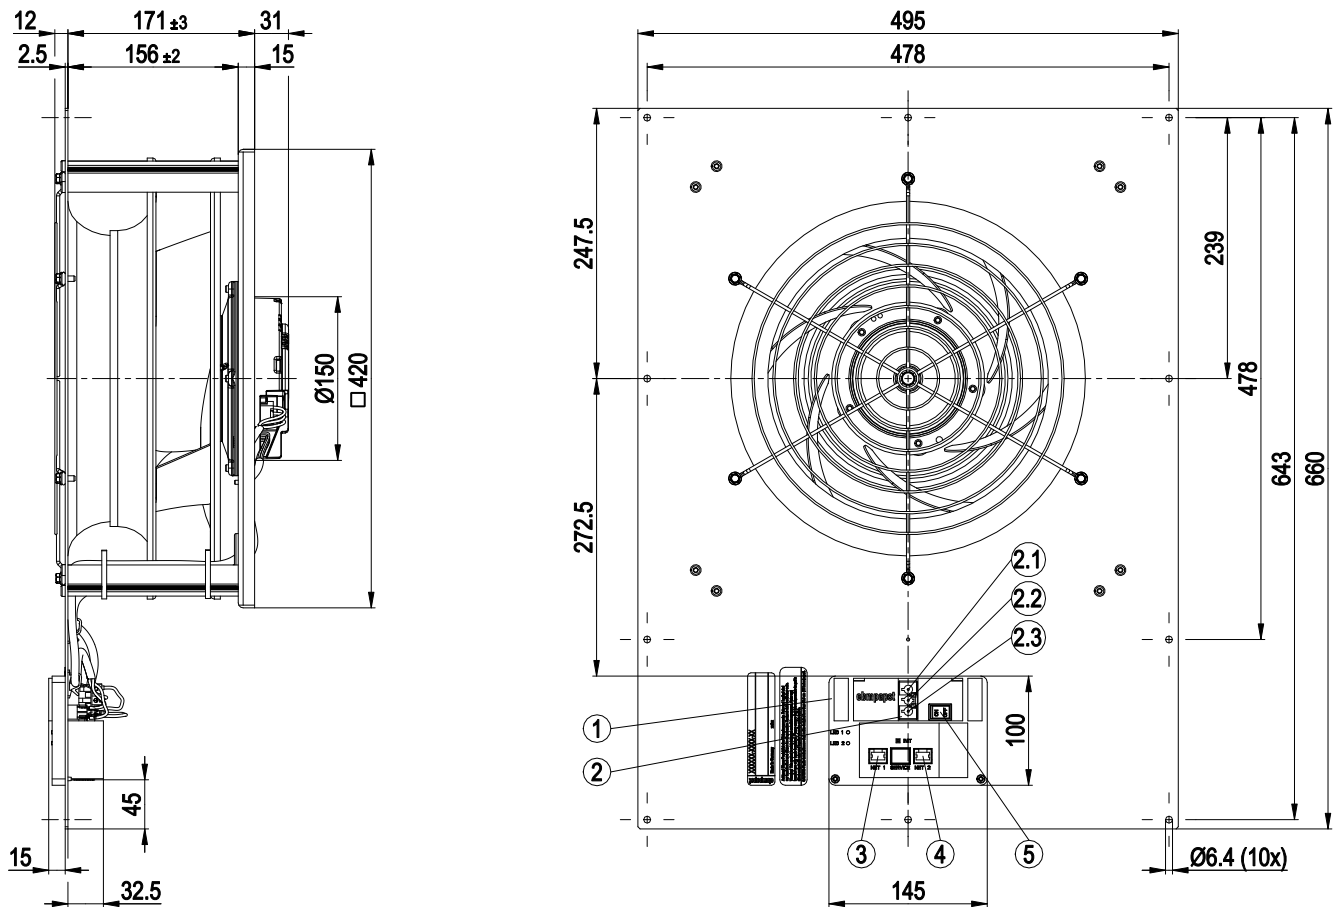


1	Plastic terminal box
2	Connector housing 3-pole GST18/3 Wieland 92.032.9058.1
2.1	L
2.2	PE
2.3	N
3	8-pole connector housing TE 100616-2
4	8-pole connector housing TE 100616-2
5	Switch, ARCOLECTRIC SWITCHES P L C (no. H8550VBACF) As-delivered condition end customer switch set to "OFF"

EC centrifugal module

backward-curved, single-intake
with support plate

Connection diagram

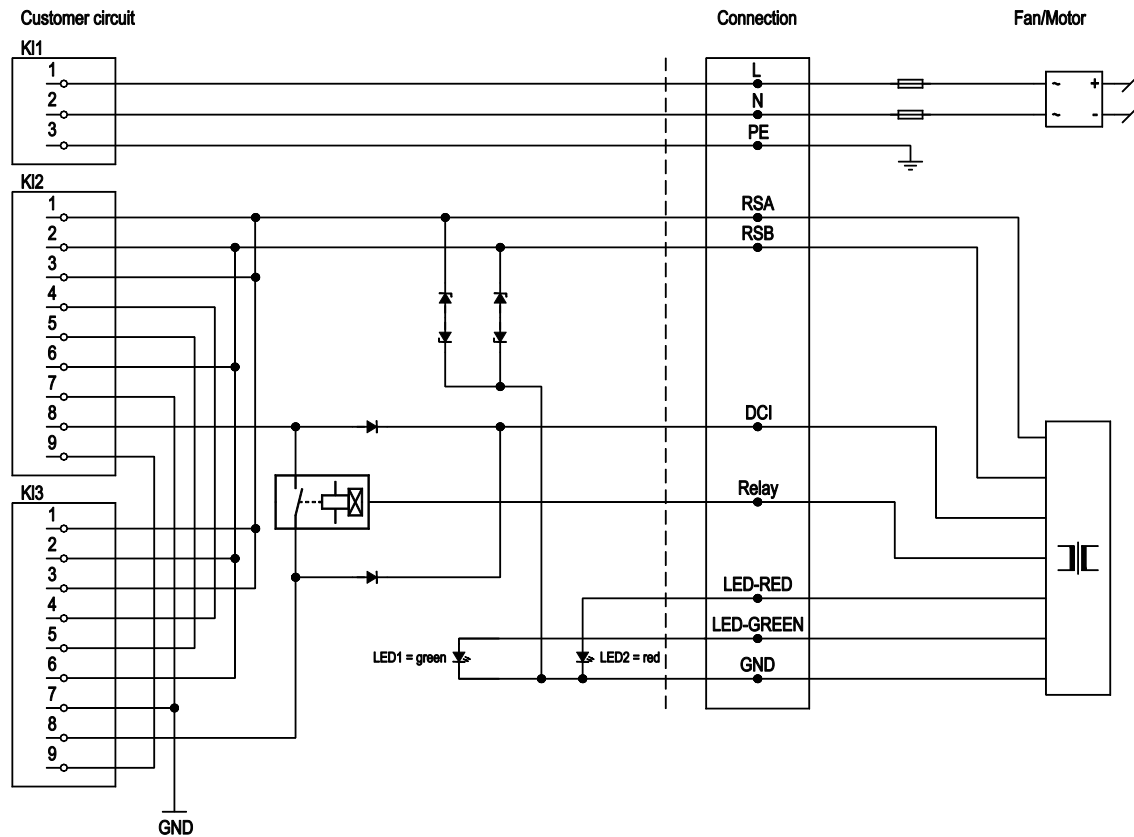

LED1 / LED2


Status	Priority	Address S/N	Speed	Green LED	Red LED
Malfunction	1	S/N any	Any	Off	Flashes 1 Hz
Winking	2	S/N = 1/1	Any	Flashes 10 Hz	On
Winking	2	S/N < 1	Any	Flashes 10 Hz	Off
After set value change	3	S/N = 1/1	Any	Flashes 3 times at 2.5 Hz	On
After set value change	3	S/N < 1	Any	Flashes 3 times at 2.5 Hz	Off
Fan speed 0	4	S/N = 1/1	n = 0	Flashes 1 Hz	On
Fan speed 0	4	S/N < 1	n = 0	Flashes 1 Hz	Off
Fan speed > 0	4	S/N = 1/1	n > 0	Off	On
Fan speed > 0	4	S/N < 1	n > 0	On	Off

No.	Conn.	Designation	Function/assignment
KL1	1	L	Power supply, phase, 50/60 Hz
KL1	2	N	Power supply, neutral conductor, 50/60 Hz
KL1	3	PE	Protective earth
KL2/KL3	1	RSA	RS-485 interface for MODBUS, RSA
KL2/KL3	2	RSB	RS-485 interface for MODBUS, RSB
KL2/KL3	3	RSA	RS-485 interface for MODBUS, RSA
KL2/KL3	4	-	Bridge KL2-KL3
KL2/KL3	5	-	Bridge KL2-KL3
KL2/KL3	6	RSB	RS-485 interface for MODBUS, RSB
KL2/KL3	7	GND	Reference ground
KL2/KL3	8	DCI	Daisy chain signal
KL2/KL3	9	Schirm	Shield for RJ45 CAT5 wire (not used)

EC centrifugal module

backward-curved, single-intake
with support plate

Curves: Air performance 50 Hz

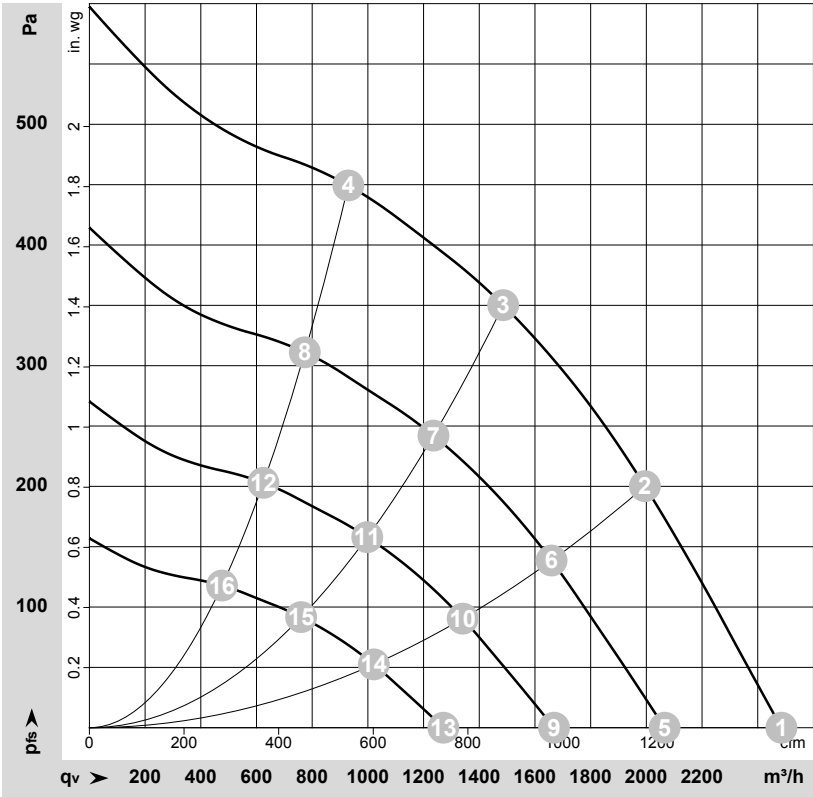

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-154637-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	m ³ /h	Pa	cfm	in. wg
1	1~	230	50	1550	214	0.94	2485	0	1465	0.00
2	1~	230	50	1550	262	1.15	1995	200	1175	0.80
3	1~	230	50	1550	275	1.20	1485	350	875	1.41
4	1~	230	50	1550	256	1.12	930	450	545	1.81
5	1~	230	50	1300	123	0.54	2065	0	1215	0.00
6	1~	230	50	1300	151	0.66	1660	140	975	0.56
7	1~	230	50	1300	159	0.70	1235	242	725	0.97
8	1~	230	50	1300	147	0.64	775	311	455	1.25
9	1~	230	50	1050	65	0.28	1670	0	980	0.00
10	1~	230	50	1050	80	0.35	1340	91	790	0.37
11	1~	230	50	1050	84	0.37	1000	158	585	0.63
12	1~	230	50	1050	78	0.34	625	203	370	0.81
13	1~	230	50	800	29	0.13	1270	0	750	0.00
14	1~	230	50	800	35	0.15	1020	53	600	0.21
15	1~	230	50	800	37	0.16	760	92	445	0.37
16	1~	230	50	800	34	0.15	475	118	280	0.47

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase

