

K3G400-AH05-64 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K3G400-AH05-64	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1550
Power consumption	W	275
Current draw	A	1.4 - 1.0
Min. ambient temperature	°C	0
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	58.7	45.5
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		75.2	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	0.27
09 Air flow q_v	m ³ /h	1605
09 Pressure increase p_{fs}	Pa	324
10 Speed (rpm) n	min ⁻¹	1565
11 Specific ratio*		1.00

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-154637



Technical description


Weight	8.8 kg
Fan size	400 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet aluminum
Spacer material	Aluminum
Inlet nozzle material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP20
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F0
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Rotor on top
Condensation drainage holes	None
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - Integrated PID controller - LON / RS485 with DCI function - Motor current limitation - PFC, active - Soft start - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	With plug
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1
Approval	UL 507; CSA C22.2 No. 113

EC centrifugal module

backward-curved, single-intake

with support plate

Product drawing

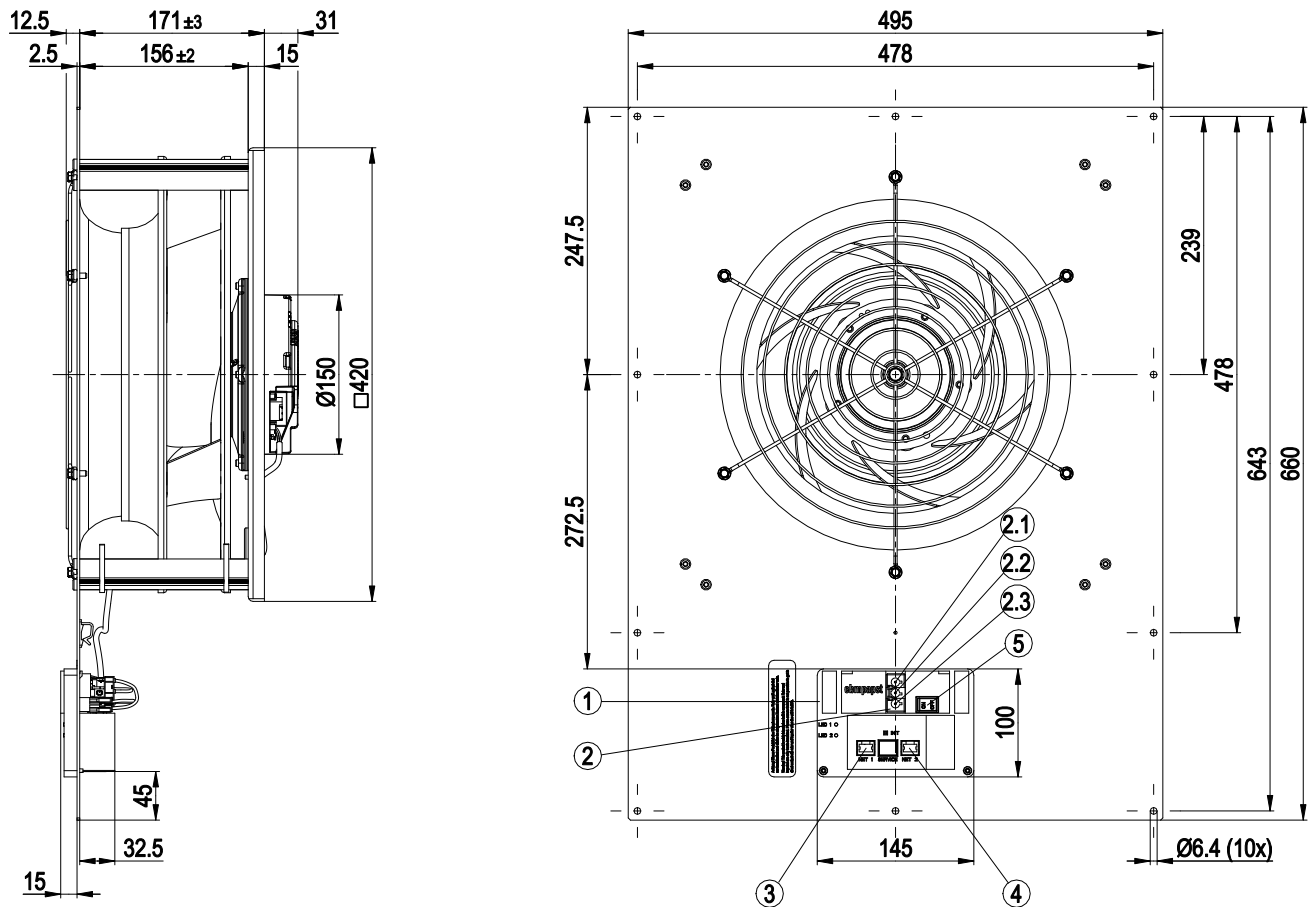


1	Terminal box
2	Connector housing 3-pole GST18/3 Wieland 92.032.9058.1
2.1	N
2.2	PE
2.3	L
3	8-pole socket housing tyco 100616-2
4	8-pole socket housing tyco 100616-2
5	Switch, ARCOLECTRIC SWITCHES P L C (no. H8550VBACF) As-delivered condition end customer switch set to "OFF"

EC centrifugal module

backward-curved, single-intake
with support plate

Connection diagram

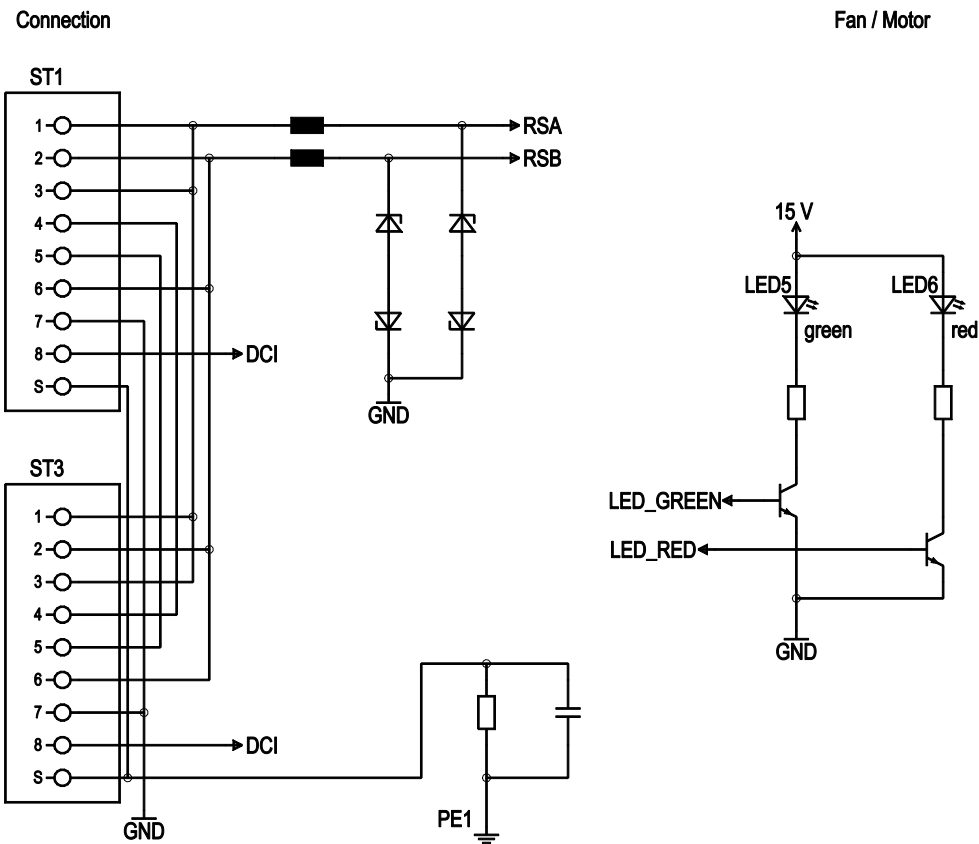


LED1 / LED2					
Status	Priority	Address S/N	Speed	LED red	LED green
General malfunction	1	S/N any	n any	Flashing 1 Hz	OFF
Signal function	2	S/N <> 1/1	n any	OFF	Flashing 10 Hz
As-delivered condition	3	S/N = 1/1	n > 0	Always ON	OFF
After initializing	3	S/N <> 1/1	n > 0	OFF	Always ON
Fan to speed 0	3	S/N <> 1/1	n = 0	OFF	Flashing 1 Hz
As-delivered condition	3	S/N = 1/1	n = 0	Always ON	Flashing 1 Hz

No.	Conn.	Designation	Function/assignment
ST1/ST3	1	LON_A	Bus connection RS485, LON_A
ST1/ST3	2	LON_B	Bus connection RS485, LON_B
ST1/ST3	3	LON_A	Bus connection RS485, LON_A
ST1/ST3	4	-	Bridge ST1 – ST3
ST1/ST3	5	-	Bridge ST1 – ST3
ST1/ST3	6	LON_B	Bus connection RS485, LON_B
ST1/ST3	7	GND	Reference ground
ST1/ST3	8	DCI	Daisy chain signal
ST1/ST3	S	Schirm	Shield for RJ45 CAT5 wire



Curves: Air performance 50 Hz

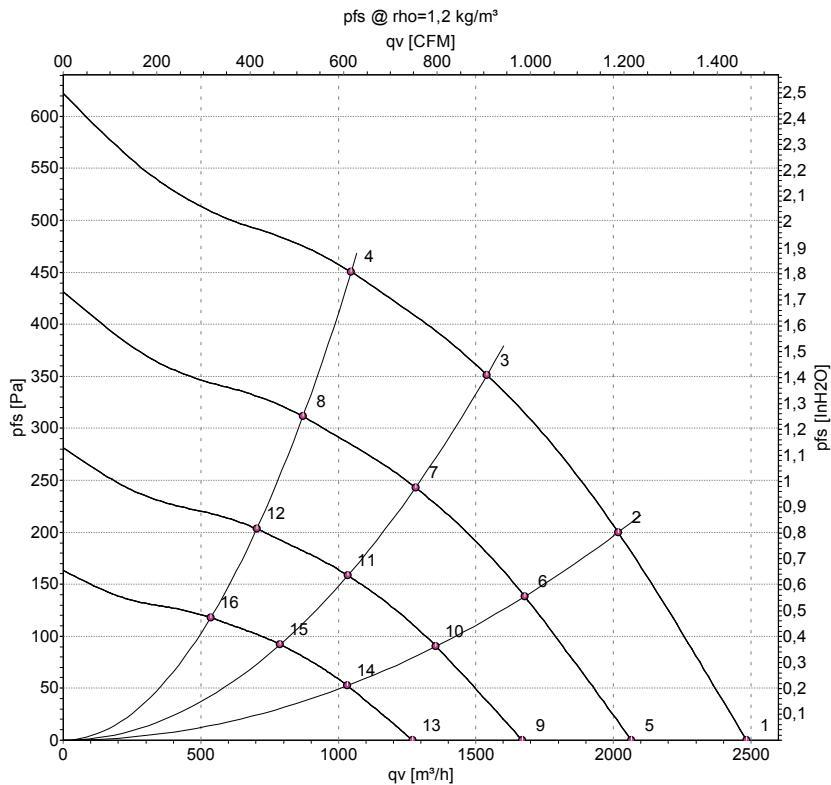

Measurement: LU-154637-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	q _v	p _{fs}	q _v	p _{fs}
	V	Hz	min ⁻¹	W	A	m³/h	Pa	cfm	inH2O
1	230	50	1550	214	0.94	2485	0	1465	0.00
2	230	50	1550	261	1.14	2015	200	1185	0.80
3	230	50	1550	275	1.21	1540	350	905	1.41
4	230	50	1550	265	1.16	1045	450	615	1.81
5	230	50	1300	123	0.54	2065	0	1215	0.00
6	230	50	1300	150	0.66	1680	139	990	0.56
7	230	50	1300	159	0.70	1280	243	755	0.98
8	230	50	1300	153	0.67	870	312	515	1.25
9	230	50	1050	65	0.28	1670	0	980	0.00
10	230	50	1050	79	0.35	1355	91	800	0.37
11	230	50	1050	84	0.37	1035	159	610	0.64
12	230	50	1050	80	0.35	705	203	415	0.81
13	230	50	800	29	0.13	1270	0	750	0.00
14	230	50	800	35	0.15	1035	53	610	0.21
15	230	50	800	37	0.16	790	92	465	0.37
16	230	50	800	36	0.16	535	118	315	0.47

U = Power supply · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · q_v = Air flow · p_{fs} = Pressure increase