

# EC centrifugal module - RadiCal

backward curved, single inlet

with support plate

K3G400-RP45-45 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Limited partnership · Headquarters Mulfingen  
County court Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen  
County court Stuttgart · HRB 590142

## Nominal data

|                          |                   |            |
|--------------------------|-------------------|------------|
| Type                     | K3G400-RP45-45    |            |
| Motor                    | M3G084-FA         |            |
| Phase                    |                   | 1~         |
| Nominal voltage          | VAC               | 230        |
| Nominal voltage range    | VAC               | 200 .. 277 |
| Frequency                | Hz                | 50/60      |
| Type of data definition  |                   | ml         |
| Speed (rpm)              | min <sup>-1</sup> | 1248       |
| Power input              | W                 | 320        |
| Current draw             | A                 | 1.7 (200V) |
| Min. ambient temperature | °C                | -25        |
| Max. ambient temperature | °C                | 40         |

ml = Max. load · me = Max. efficiency · fa = Running at free air · cs = Customer specs · cu = Customer unit  
Subject to alterations

## Data according to ErP directive

|                                   |   | Actual | Request 2015 |                               |                   |      |
|-----------------------------------|---|--------|--------------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 62.3   | 46.2         | 09 Power input $P_{ed}$       | kW                | 0.31 |
| 02 Measurement category           |   | A      |              | 09 Air flow $q_v$             | m <sup>3</sup> /h | 2400 |
| 03 Efficiency category            |   | Static |              | 09 Pressure increase $p_{fs}$ | Pa                | 259  |
| 04 Efficiency grade N             |   | 78.1   | 62           | 10 Speed (rpm) $n$            | min <sup>-1</sup> | 1260 |
| 05 Variable speed drive           |   | Yes    |              | 11 Specific ratio*            |                   | 1.00 |

Data definition with optimum efficiency.  
The ErP data is determined using a motor-impeller combination in a standardised measurement configuration.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-151921



## Technical features


|  |   |
|--|---|
| Mass   | 11.2 kg   |
| Size   | 400 mm  |
| Surface of rotor   | Coated in black   |
| Material of electronics housing                                    | Die-cast aluminium  |
| Material of impeller   | PP plastic  |
| Material of mounting plate   | Aluminium sheet   |
| Material of distancing profiles                                    | Aluminium   |
| Material of inlet nozzle   | Aluminium sheet   |
| Number of blades   | 6   |
| Direction of rotation  | Clockwise, seen on rotor  |
| Type of protection   | IP 20   |
| Insulation class   | "B"   |
| Humidity (F)/environmental protection class (H)                    | F0  |
| Max. permissible ambient motor temp. (transp./ storage)            | +80 °C  |
| Min. permissible ambient motor temp. (transp./storage)             | -40 °C  |
| Mounting position  | Shaft horizontal or rotor on top; rotor on bottom on request  |
| Condensate discharge holes   | None  |
| Operation mode   | S1  |
| Motor bearing  | Ball bearing  |
| Technical features   | <ul style="list-style-type: none"> <li>- Operation and alarm display via LED</li> <li>- Integrated PID controller</li> <li>- Motor current limit</li> <li>- PFC, active</li> <li>-RS-485 ebmBUS with DCI function</li> <li>- Soft start</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Over-temperature protected electronics / motor</li> <li>- Line undervoltage / phase failure detection</li> </ul> |
| EMC interference immunity  | Acc. to EN 61000-6-2 (industrial environment)   |
| EMC harmonics  | Acc. to EN 61000-3-2/3  |
| EMC interference emission  | Acc. to EN 61000-6-4 (industrial environment)   |
| Touch current acc. IEC 60990 (measuring network Fig. 4, TN system) | <= 3.5 mA   |
| Electrical leads   | With plug   |
| Motor protection   | Thermal overload protector (TOP) wired internally   |
| Cable exit   | Variable  |
| Protection class   | I (if protective earth is connected by customer)  |
| Product conforming to standard                                     | EN 61800-5-1  |
| Approval   | CSA C22.2 No.77; UL 1004-3  |



# EC centrifugal module - RadiCal

backward curved, single inlet  
with support plate

## Connection screen

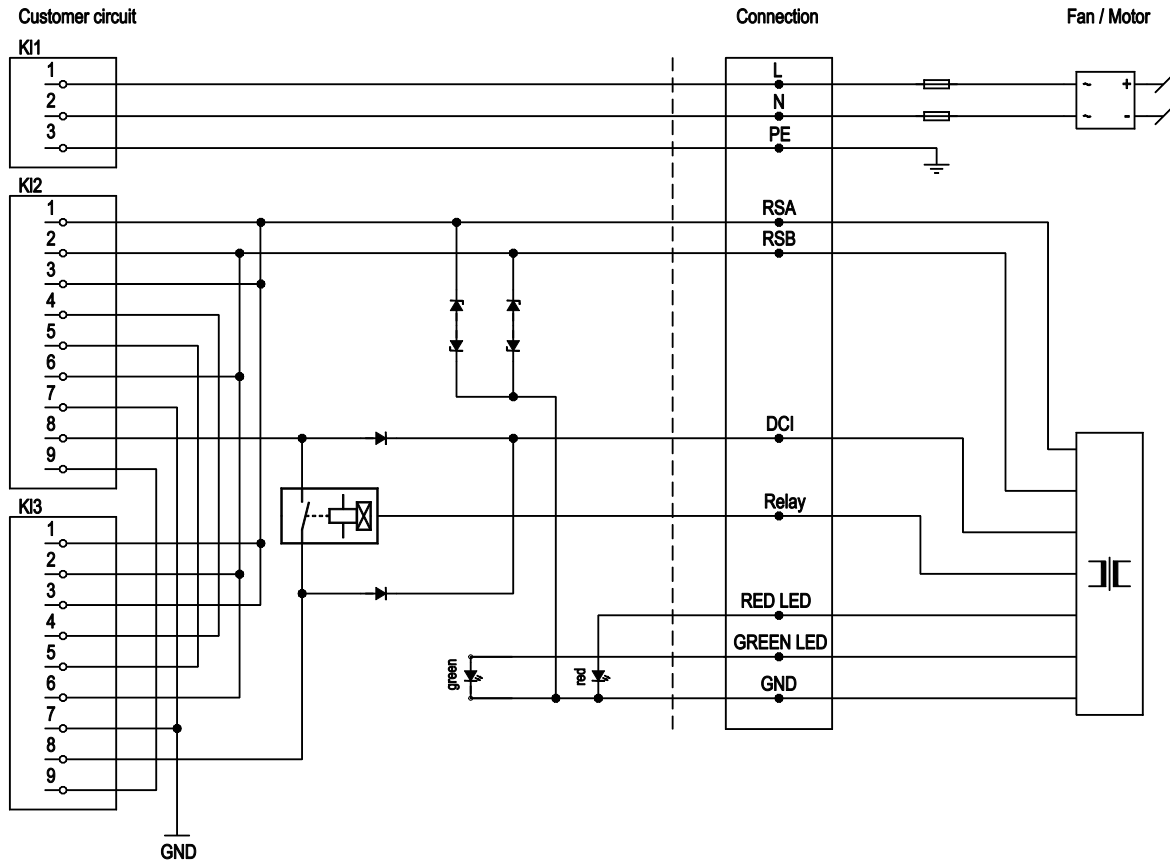


### LED1 / LED2

| Status                 | Priority | Address S/N | Speed | Green LED             | Red LED       |
|------------------------|----------|-------------|-------|-----------------------|---------------|
| Malfunction            | 1        | S/N any     | any   | off                   | Flashing 1 Hz |
| Flashing               | 2        | S/N = 1/1   | any   | Flashing 10 Hz        | on            |
| Flashing               | 2        | S/N < 1     | any   | Flashing 10 Hz        | off           |
| After set value change | 3        | S/N = 1/1   | any   | Flashing 3x at 2.5 Hz | on            |
| After set value change | 3        | S/N < 1     | any   | Flashing 3x at 2.5 Hz | off           |
| Fan speed 0            | 4        | S/N = 1/1   | n = 0 | Flashing 1 Hz         | on            |
| Fan speed 0            | 4        | S/N < 1     | n = 0 | Flashing 1 Hz         | off           |
| Fan speed >0           | 4        | S/N = 1/1   | n > 0 | off                   | on            |
| Fan speed >0           | 4        | S/N < 1     | n > 0 | on                    | off           |

| No.     | Conn. | Designation | Function / assignment                     |
|---------|-------|-------------|---|
| KL1     | 1     | L           | Power supply, phase, 50/60 Hz             |
| KL1     | 2     | N           | Power supply, neutral conductor, 50/60 Hz |
| KL1     | 3     | PE          | Protective earth                          |
| KL2/KL3 | 1     | RSA         | RS485 interface for ebmBUS, RSA           |
| KL2/KL3 | 2     | RSB         | RS485 interface for ebmBUS, RSB           |
| KL2/KL3 | 3     | RSA         | RS485 interface for ebmBUS, RSA           |
| KL2/KL3 | 4     | -           | Bridge KL2-KL3                            |
| KL2/KL3 | 5     | -           | Bridge KL2-KL3                            |
| KL2/KL3 | 6     | RSB         | RS485 interface for ebmBUS, RSB           |
| KL2/KL3 | 7     | GND         | Reference ground                          |
| KL2/KL3 | 8     | DCI         | Daisy chain signal                        |
| KL2/KL3 | 9     | Schirm      | Shield for RJ45-CAT5 wire (not used)      |



## Charts: Air flow 50 Hz

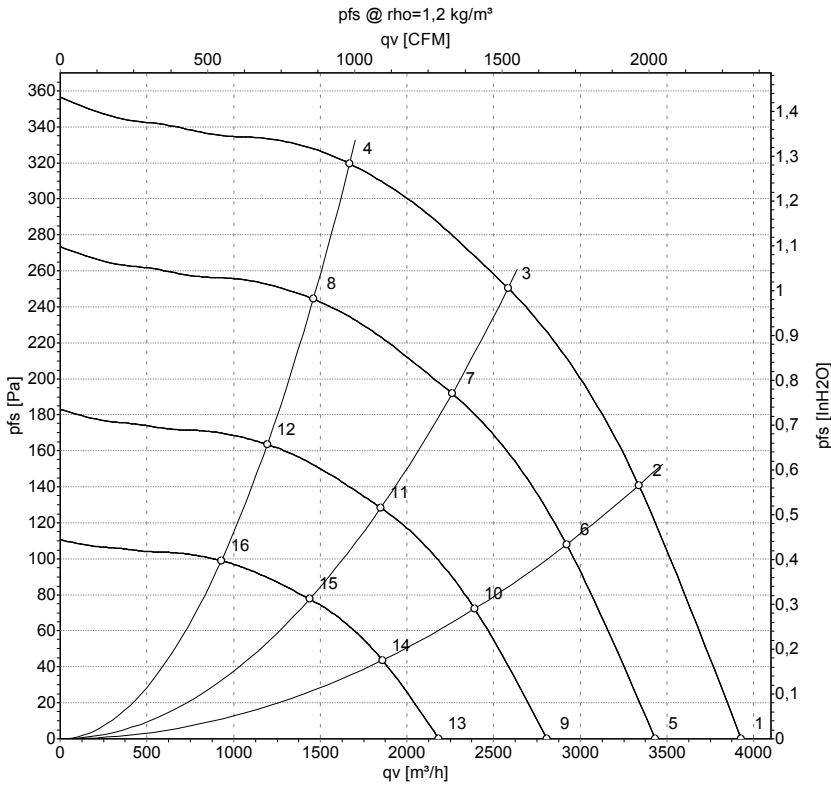

Measurement: LU-151921-1

Air performance measured as per ISO 5801 Installation category A. For detailed information on the measuring set-up, please contact ebm-papst. Suction-side noise levels: LwA measured as per ISO 13347 / LpA measured with 1m distance to fan axis. The values given are valid under the measuring conditions mentioned above and may vary according to the actual installation situation. With any deviation from the standard set-up, the specific values have to be checked and reviewed with the unit installed.

## Measured values

|    | U   | f  | n                 | P <sub>ed</sub> | I    | q <sub>v</sub>    | P <sub>fs</sub> | q <sub>v</sub> | P <sub>fs</sub> |
|----|-----|----|-------------------|-----------------|------|-------------------|-----------------|----------------|-----------------|
|    | V   | Hz | min <sup>-1</sup> | W               | A    | m <sup>3</sup> /h | Pa              | cfm            | inH2O           |
| 1  | 230 | 50 | 1250              | 234             | 1.03 | 3930              | 0               | 2310           | 0.00            |
| 2  | 230 | 50 | 1250              | 295             | 1.29 | 3340              | 140             | 1965           | 0.56            |
| 3  | 230 | 50 | 1250              | 320             | 1.40 | 2585              | 250             | 1520           | 1.00            |
| 4  | 230 | 50 | 1250              | 283             | 1.24 | 1670              | 320             | 985            | 1.28            |
| 5  | 230 | 50 | 1100              | 156             | 0.69 | 3430              | 0               | 2020           | 0.00            |
| 6  | 230 | 50 | 1100              | 198             | 0.87 | 2920              | 109             | 1720           | 0.44            |
| 7  | 230 | 50 | 1100              | 212             | 0.93 | 2260              | 192             | 1330           | 0.77            |
| 8  | 230 | 50 | 1100              | 189             | 0.83 | 1460              | 244             | 860            | 0.98            |
| 9  | 230 | 50 | 900               | 86              | 0.38 | 2810              | 0               | 1655           | 0.00            |
| 10 | 230 | 50 | 900               | 108             | 0.48 | 2390              | 73              | 1405           | 0.29            |
| 11 | 230 | 50 | 900               | 116             | 0.51 | 1850              | 128             | 1090           | 0.51            |
| 12 | 230 | 50 | 900               | 104             | 0.46 | 1195              | 164             | 705            | 0.66            |
| 13 | 230 | 50 | 700               | 40              | 0.18 | 2185              | 0               | 1285           | 0.00            |
| 14 | 230 | 50 | 700               | 51              | 0.22 | 1860              | 44              | 1095           | 0.18            |
| 15 | 230 | 50 | 700               | 55              | 0.24 | 1440              | 78              | 845            | 0.31            |
| 16 | 230 | 50 | 700               | 49              | 0.21 | 930               | 99              | 545            | 0.40            |

U = Supply voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power input · I = Current draw · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

