

K3G500-FA28-05 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

Nominal data

Type	K3G500-FA28-05	
Motor	M3G150-FF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1900
Power consumption	W	2850
Current draw	A	4.4
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	71.1	56.3	09 Power consumption P_{ed}	kW	2.84
02 Measurement category		A		09 Air flow q_v	m ³ /h	8715
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	794
04 Efficiency grade N		76.8	62	10 Speed (rpm) n	min ⁻¹	1905
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-206666

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings).

The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again.

The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).



Technical description

Size	500 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-3 (household environment), except EN 61000-3-2 for professionally used equipment with a total rated power greater than 1 kW
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	≤ 3.5 mA
Electrical hookup	Terminal box
Motor protection	Reverse polarity and locked-rotor protection
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE; UKCA
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1




EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Product drawing

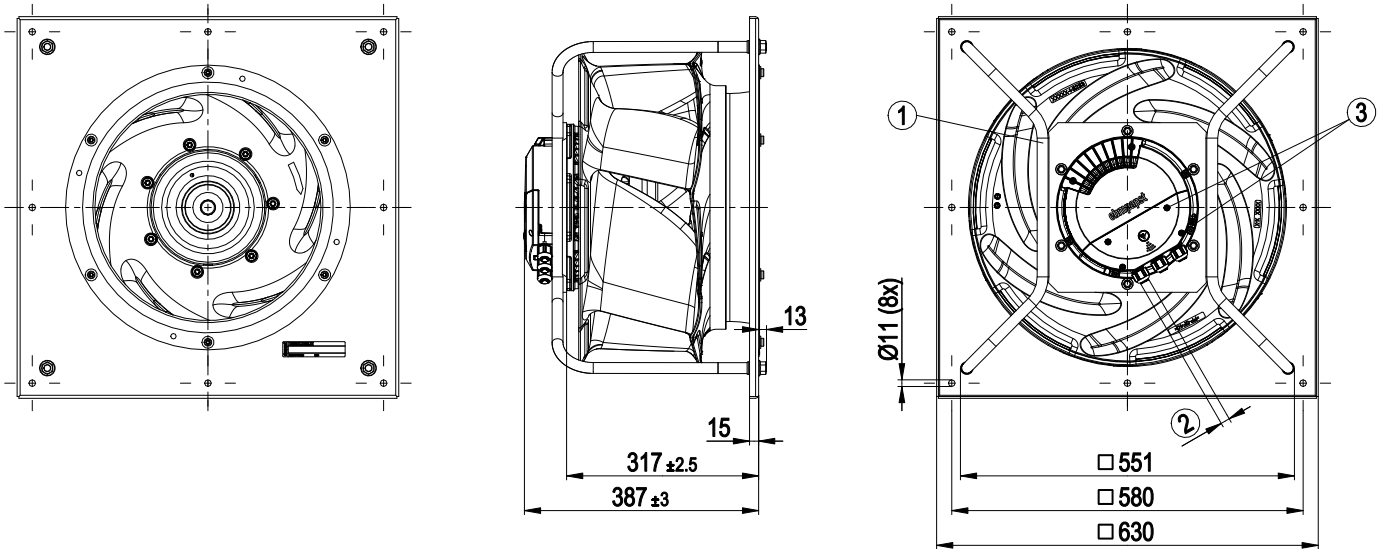


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm (The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
3	Tightening torque 1.5 ± 0.2 Nm

EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Connection diagram

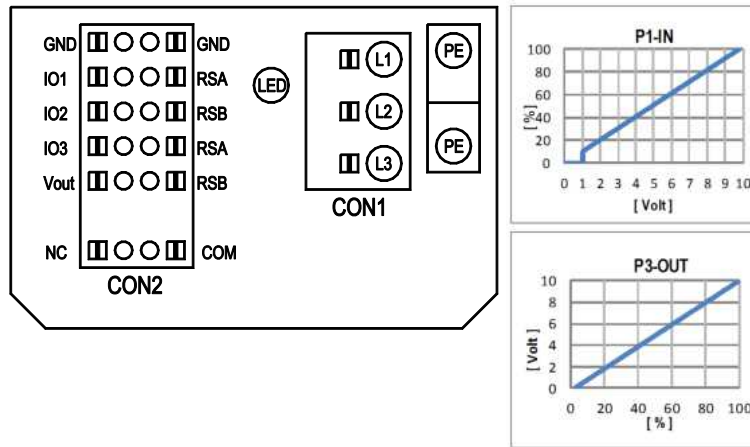

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V/PWM, $R_i=100\text{ K}\Omega$, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Function: no SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC $\pm 5\%$, $P_{\max}=800\text{ mW}$, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve



EC centrifugal module - RadiCal

backward-curved, single-intake

with support bracket

Terminal/plug assignment


configurable option																								
For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3																								
CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	INPUT										OUTPUT									
					Din1 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D158 [0]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: system modulation level %	D130 [5]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]		
					Ain1 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	D158 [2]	switch: set value source	D16C [...]	switch: tach out (selected directly via IO mode)	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]						
					Tach out (open collector output)	U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [5]	switch: direction of rotation: cw / ccw	D148 [...]	switch: cooling (neg.)	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]						
	Diagnostics out (open collector output)	U _{max} = 50VDC, I _{max} = 20mA, SELV	D158 [6]	switch: parameter set: #1 / #2	D104 [...]	source: sensor value	D147 [...]	source: set value	D101 [...]															
	IO1	Din2 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D159 [0]	switch: parameter set: #1 / #2	D104 [...]	source: sensor value	D147 [...]	source: set value	D101 [...]														
		Ain2 0-10V/PWM: analog input	RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10KHz, SELV	D159 [2]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
	IO2	Ain2 4-20mA: analog input	RI = 125R, characteristic curve parameterizable, SELV	D159 [3]	switch: parameter set: #1 / #2	D104 [...]	source: sensor value	D147 [...]	source: set value	D101 [...]														
		Din3 (active high): digital input	active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC	D15A [0]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
	IO3	Din3 (active low): digital input	active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC	D15A [1]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
PWMMin3: digital input, idle level high		PWM = 40Hz - 10KHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV	D15A [7]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]		
RSA	RSB	PWMMin3: digital input, idle level low	40Hz - 10KHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV	D15A [8]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
		Aout3 0-10V: analog output	function parameterizable, max. 5mA, max output frequency 300Hz, SELV	D15A [4]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
Vout	Vout	Tacho out (pulses), analog output	0-10V/max. 5mA, max output frequency 300Hz, SELV	D15A [5]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
		Diagnostics out (pulses)	0-10V/max. 5mA, max output frequency 300Hz, SELV	D15A [6]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
Vout	Vout	RS485 bus connection,	MODBUS RTU, specification V6.3, SELV		switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
		voltage output	voltage parameterizable 3.3..24VDC +/- 5%, P _{max} =800mW, short-circuit-proof, supply for external devices, SELV	D16E [...]	switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
Vout	Vout	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15..50VDC		switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	
					switch: control function: heating (pos.) / #2	D12E [...]	switch: direction of rotation: cw / ccw	D148 [...]	switch: set value source	D16C [...]	switch: fan enable / disable	D16A [...]	signal: tach out (selected directly via IO mode)	signal: diagnostics out (selected directly via IO mode)	D130 [0]	signal: fan modulation level %	D130 [1]	signal: actual speed	D130 [2]	signal: remote control output 0-10V	D00C [1]	pulse input for auto-addressing	D130 [4]	

◦ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3



Curves: Air performance 50 Hz

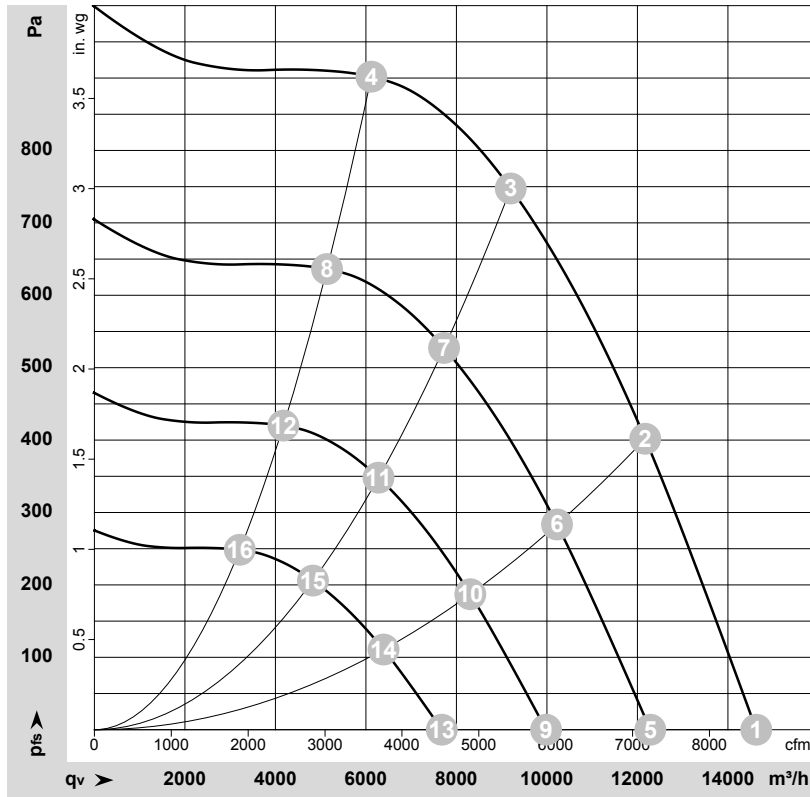

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-206666-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m ³ /h	Pa	cfm	in. wg
1	3~	400	50	1900	1648	2.61	82	89	92	14625	0	8610	0.00
2	3~	400	50	1900	2479	3.83	76	83	88	12170	400	7165	1.61
3	3~	400	50	1900	2850	4.40	71	78	85	9200	750	5415	3.01
4	3~	400	50	1900	2627	4.05	75	82	87	6120	900	3600	3.61
5	3~	400	50	1600	976	1.55	77	85	88	12285	0	7230	0.00
6	3~	400	50	1600	1469	2.27	71	78	84	10225	285	6015	1.14
7	3~	400	50	1600	1685	2.59	66	74	81	7725	528	4550	2.12
8	3~	400	50	1600	1557	2.40	71	78	83	5140	638	3025	2.56
9	3~	400	50	1300	524	0.83	72	79	83	9980	0	5875	0.00
10	3~	400	50	1300	788	1.22	66	73	79	8305	188	4890	0.75
11	3~	400	50	1300	904	1.39	61	69	76	6280	349	3695	1.40
12	3~	400	50	1300	835	1.29	65	73	78	4175	421	2460	1.69
13	3~	400	50	1000	238	0.38	65	73	76	7680	0	4520	0.00
14	3~	400	50	1000	359	0.55	60	67	72	6390	111	3760	0.45
15	3~	400	50	1000	411	0.63	54	62	69	4830	206	2840	0.83
16	3~	400	50	1000	380	0.59	59	66	71	3215	249	1890	1.00

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase

