

K3G560-PB31-35 ebmpapst Datasheet

sales@fansco.com

www.fansco.com

## Nominal data

Type	K3G560-PB31-35	
Motor	M3G150-IF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	1700
Power consumption	W	4250
Current draw	A	6.5
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011 (EN 17166)

		Actual	Req. 2015			
01 Overall efficiency $\eta_{es}$	%	70.1	58	09 Power consumption $P_{ed}$	kW	4.15
02 Measurement category		A		09 Air flow $q_v$	m <sup>3</sup> /h	9600
03 Efficiency category		Static		09 Pressure increase $p_{fs}$	Pa	1052
04 Efficiency grade N		74.1	62	10 Speed (rpm) n	min <sup>-1</sup>	1695
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-204600




## Technical description

<b>Weight</b>	51.8 kg
<b>Size</b>	560 mm
<b>Motor size</b>	150
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum, painted gray
<b>Impeller material</b>	Sheet aluminum, painted black
<b>Support plate material</b>	Sheet steel, galvanized and painted black
<b>Support bracket material</b>	Steel, painted black
<b>Inlet nozzle material</b>	Sheet steel, galvanized and painted black
<b>Number of blades</b>	5
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP55
<b>Insulation class</b>	"F"
<b>Moisture (F) / Environmental (H) protection class</b>	H2+S
<b>Ambient temperature note</b>	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	See legend on product drawing
<b>Condensation drainage holes</b>	On rotor side
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Operation and alarm display with LED</li> <li>- External 15-50 VDC input (parameterization)</li> <li>- Alarm relay</li> <li>- Integrated PI controller</li> <li>- Configurable inputs/outputs (I/O)</li> <li>- MODBUS V6.3</li> <li>- Motor current limitation</li> <li>- RFID - ISO 15693 compatible</li> <li>- RS-485 MODBUS-RTU</li> <li>- Soft start</li> <li>- Voltage output 3.3-24 VDC, Pmax = 800 mW</li> <li>- Control interface with SELV potential safely disconnected from the mains</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Line undervoltage / phase failure detection</li> </ul>
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Electrical hookup</b>	Terminal box
<b>Motor protection</b>	Reverse polarity and locked-rotor protection
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730-1

# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Product drawing

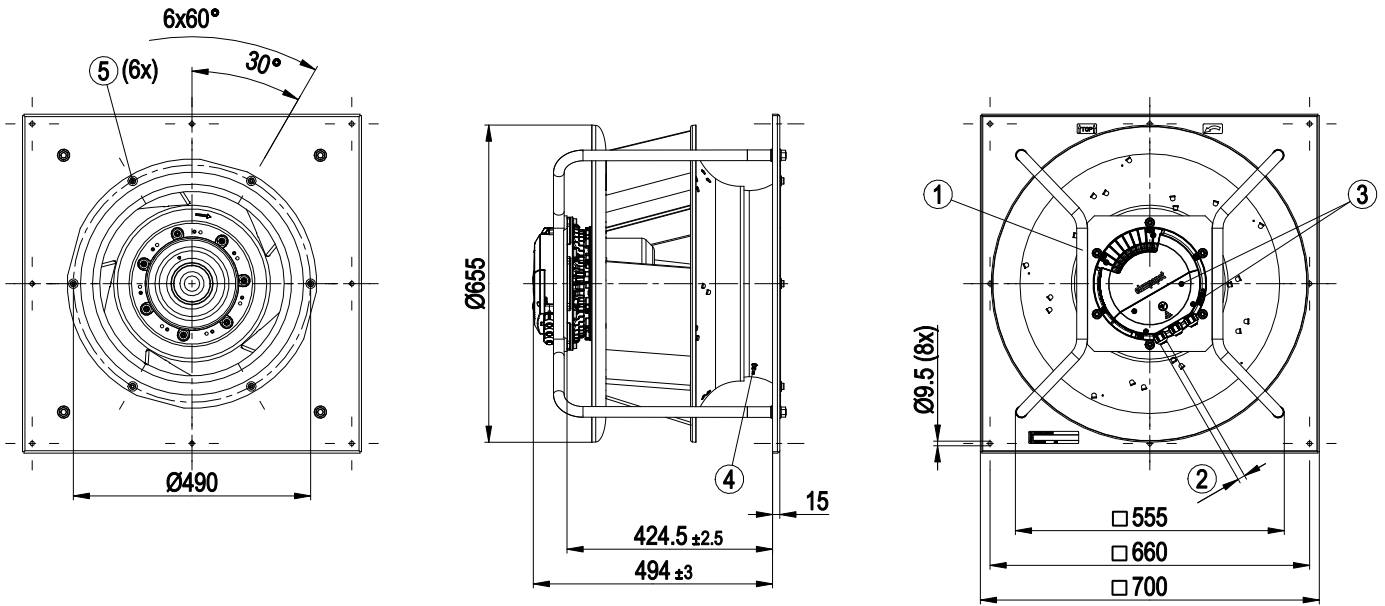


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque $4 \pm 0.6$ Nm
3	Tightening torque $1.5 \pm 0.2$ Nm
4	Inlet ring with pressure tap (k-factor: 348)
5	Mounting for inlet ring



# EC centrifugal module - RadiPac

backward-curved, single-intake  
with support bracket

## Connection diagram

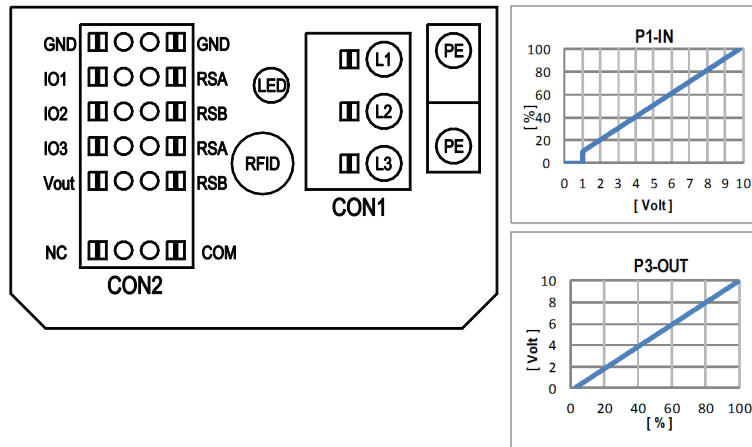

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve




## Terminal/plug assignment

CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse
101	<ul style="list-style-type: none"> <li>configurable option</li> </ul>	active: applied voltage 3.5-50VDC, SELV RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$ , SELV Umax=50VDC, Imax=20mA SELV Umax=50VDC, Imax=20mA SELV	D158 [0] MODBUS Register for IO mode configuration
102	<ul style="list-style-type: none"> <li>configurable option</li> </ul>	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$ , SELV RI=125R, characteristic curve parameterizable, SELV	D147 [..] source: sensor value D104 [..] switch: parameter set: #1 / #2 D12E [..] switch: control function: heating (pos-) / cooling (neg-) D148 [..] switch: direction of rotation: cw / ccw D16C [..] switch: set value source D16A [..] switch: fan enable / disable
103	<ul style="list-style-type: none"> <li>configurable option</li> </ul>	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV 40Hz - 10kHz, characteristics parameterizable not active: pin open or applied voltage 3.5-50VDC active: applied voltage < 1.5VDC, SELV function parameterizable, max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV 0-10V max. 5mA, max output frequency 300Hz, SELV MODBUS RTU, specification V6.0, SELV	D101 [..] source: set value D147 [..] source: sensor value D104 [..] switch: parameter set: #1 / #2 D12E [..] switch: control function: heating (pos-) / cooling (neg-) D148 [..] switch: direction of rotation: cw / ccw D16C [..] switch: set value source D16A [..] switch: fan enable / disable
Yout	alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage		

For further information and additional functions see EC Control Software: Fan-Set-App. or MODBUS Parameter Specification V6.0



## Curves: Air performance 50 Hz

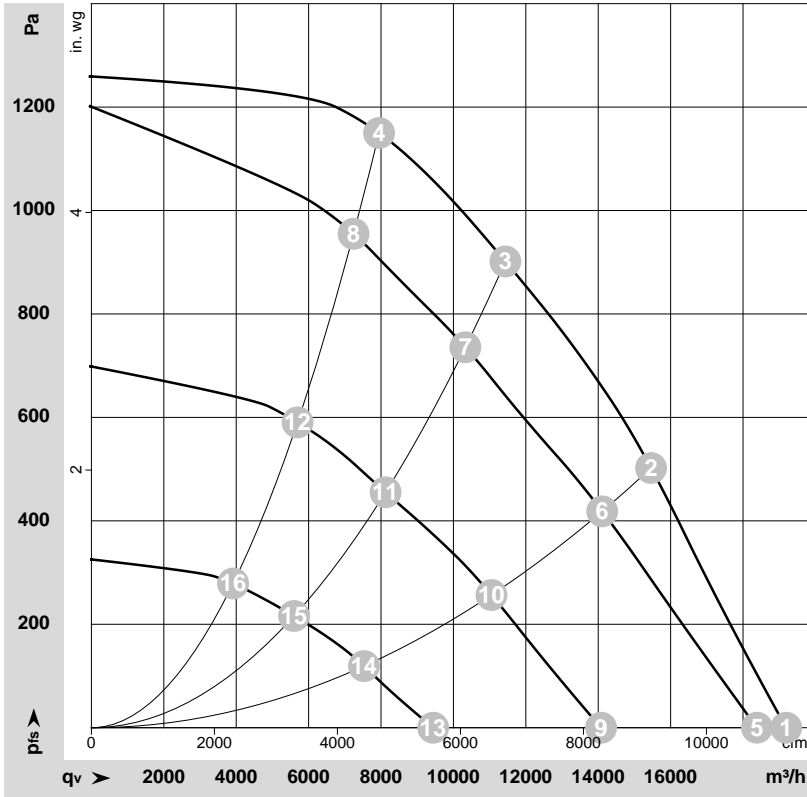

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-204600-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	Wired	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	LwA <sub>out</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
		V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	dB(A)	m <sup>3</sup> /h	Pa	cfm	in. wg
1	3~	400	50	1700	2501	3.86	96	102	101	19190	0	11295	0.00
2	3~	400	50	1700	3763	5.74	84	90	92	15460	500	9100	2.01
3	3~	400	50	1700	4250	6.50	75	82	87	11435	900	6730	3.61
4	3~	400	50	1700	4069	6.20	77	85	90	7945	1150	4675	4.62
5	3~	400	50	1635	2275	3.53	96	100	100	18385	0	10820	0.00
6	3~	400	50	1555	2888	4.44	82	88	90	14110	423	8305	1.70
7	3~	400	50	1535	3165	4.85	73	80	85	10330	739	6080	2.97
8	3~	400	50	1550	3078	4.72	75	82	87	7240	958	4260	3.85
9	3~	400	50	1255	1064	1.78	86	92	92	14080	0	8285	0.00
10	3~	400	50	1225	1419	2.28	74	81	83	11050	258	6505	1.04
11	3~	400	50	1210	1547	2.47	67	74	79	8125	455	4785	1.83
12	3~	400	50	1215	1494	2.39	68	75	81	5695	591	3350	2.37
13	3~	400	50	855	378	0.85	72	79	80	9440	0	5555	0.00
14	3~	400	50	840	494	1.02	63	71	74	7530	120	4430	0.48
15	3~	400	50	835	546	1.09	57	65	70	5600	216	3295	0.87
16	3~	400	50	840	522	1.06	59	66	72	3915	280	2305	1.12

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · P<sub>fs</sub> = Pressure increase

